

BANDVULC

BT3 FLEETMASTER

445/45R19.5

Tyre Size	445/45R19.5	Fitment	Trailer
Tread Pattern	BT3 Fleetmaster	Max inflation Pressure:	
Load Index	160	Bar	9.0
Speed Symbol	J	PSI	131
Speed Km/h	100	Features	SB, CC
Recommended Rim	14.00		

APPLICATION RECOMMENDATION

APPLICATION Long Haul
CONDITIONS All Season
FITMENT Trailer




TYRE RANGE FEATURES -
SMART BLADE (SB), COOL CARBON (CC)



BT3 **FLEETMASTER**
445/45R19.5

Pattern: **BT3**
445/45R19.5 160J

REGROOVE GUIDE

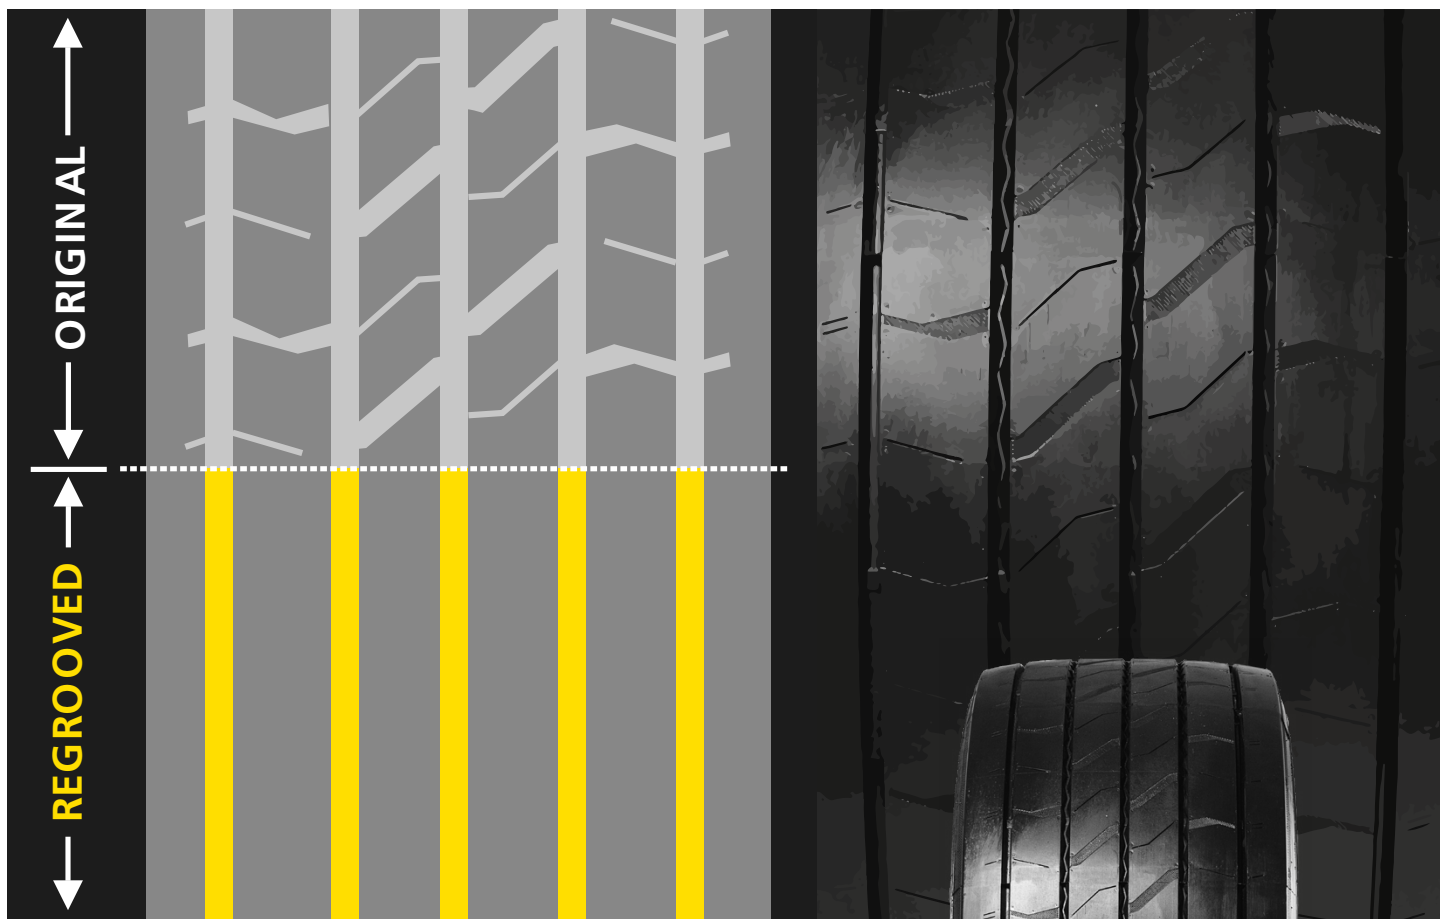

Regroove Outer Width 10mm
Regroove Inner Width 8mm

Regroove Outer Depth 2.5mm
Regroove Inner Depth 3mm

Outer Blade
W4

Inner Blade
W3



TYRES ENGINEERED &
MANUFACTURED IN THE UK

