

BANDVULC

DELIVERYMASTER III

295/80R22.5

Tyre Size	295/80R22.5	Fitment	All Round
Tread Pattern	Deliverymaster III	Max inflation Pressure:	
Load Index	152/148	Bar	8.5
Speed Symbol	J	PSI	123
Speed Km/h	100	Features	ABV, HP, AM
Recommended Rim	8.25		

APPLICATION RECOMMENDATION

APPLICATION Distribution
CONDITIONS All Season
FITMENT All Round



MUD/SNOW



3PMSF



REGROOVABLE

TYRE RANGE FEATURES -

ARMORBAND™ + VISUAL (ABV), HIGH POLYMER (HP),
ADVANCED MILEAGE (AM)




DELIVERYMASTER III

295/80R22.5

295/80R22.5

152/148J

REGROOVE GUIDE

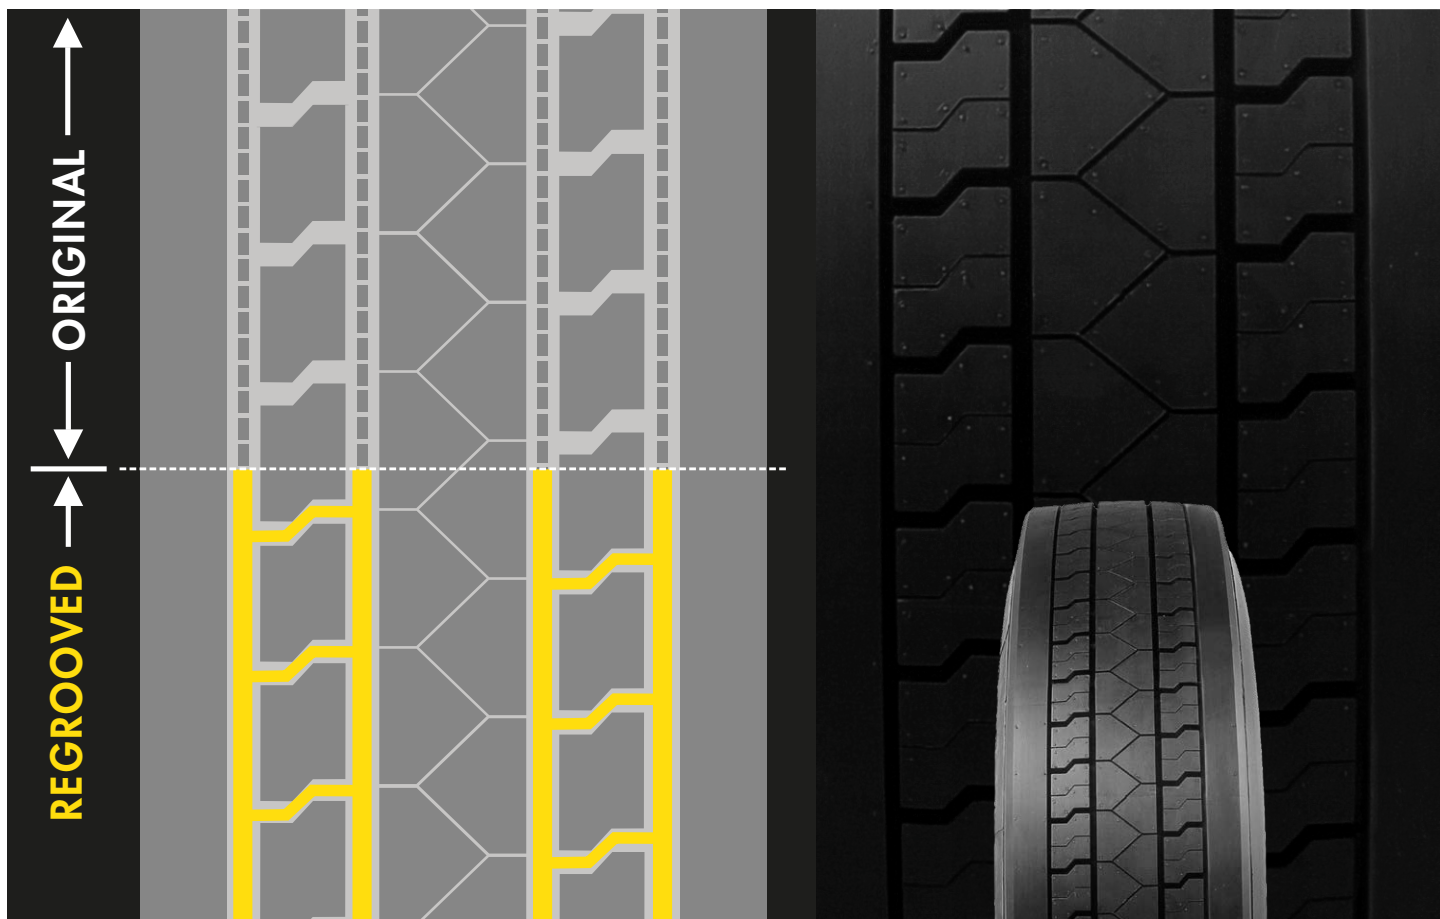

Regroove Width

4mm

Regroove Depth

4mm

Blade Type
W1



TYRES ENGINEERED &
MANUFACTURED IN THE UK

