

**CARLISLE**

*branded tires are now*

**CARLSTAR**



**AGRICULTURE**

# AGRICULTURE

Agricultural tires used to be manufactured under the name Carlisle has been workhorses of American farms for decades. Applications for farm fronts and rears, implement, transportation and more. . Now they are getting a new brand name after their manufacturing company: CARLSTAR

TREAD VIEW QUICK REFERENCE GUIDE





## FARM SPECIALIST IMPLEMENT

### Hay Rake

The Farm Specialist Implement tires are especially designed for heavy duty conditions resulting in longer life. The improved self-cleaning is achieved by specifically designed breakers in the tread pattern. Additionally, we designed inner liners and compound for high plunger resistance.



| Item Number | Size     | Star/PR | LI/SI | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Weight (kg) | CoO | EAN           |
|-------------|----------|---------|-------|-----------------------|--------------------|---------------|--------------------|--------------------------|-------------|-----|---------------|
| 6A03361     | 155/70-6 | 6       | 70 A6 | 360.7                 | 157.2              | 335           | 30                 | 3.3                      | 2.54        | CN  | 5999110800318 |
| 6A02351     | 165/60-8 | 6       | 64 A6 | 406.4                 | 162.6              | 280           | 30                 | 3                        | 3.1         | CN  | 5999110800356 |
| 6A02361     | 165/60-8 | 10      | 85 A6 | 406.4                 | 162.6              | 515           | 30                 | 5.1                      | 3.27        | CN  | 5999110800349 |
| 6A03371     | 215/60-8 | 6       | 82 A6 | 450.9                 | 213.4              | 475           | 30                 | 2.35                     | 4.5         | CN  | 5999110800417 |

## FARM SPECIALIST F-1

### Hay Rake Applications

Used for highway service implement applications, the Farm Specialist F-1 tire is specially designed for towed vehicle applications at intermittent highway speeds. DOT approved for highway use. Made in the USA.



| Item Number | Size              | Star/PLY | LI/SI | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (Kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Weight (kg) | CoO | EAN           |
|-------------|-------------------|----------|-------|-----------------------|--------------------|---------------|--------------------|--------------------------|-------------|-----|---------------|
| 51H359      | 9.5L-15FI         | LR D     | 115 J | 768                   | 10                 | 1216          | 60                 | 4.1                      | 18.42       | US  | 5999110825359 |
| 51H360      | 9.5L-15FI         | LR E     | 120 J | 768                   | 10                 | 1398          | 60                 | 5.2                      | 18.68       | US  | 5999110825557 |
| 51H392      | 11L-15FI          | LR F     | 128 J | 778                   | 11                 | 1797          | 60                 | 6.2                      | 25.1        | US  | 5999110803203 |
| 51H386      | 11L-15FI          | LR D     | 120 J | 778                   | 11                 | 1398          | 60                 | 4.1                      | 21.4        | US  | 5999110803197 |
| 6A0971      | 31 x 13.50-15 NHS | 12       | 124 B | 787                   | 358                | 1600          | 50                 | 5.2                      | 29          | US  | 5999110835341 |
| 6A0562      | 12.5L-15FI        | LR F     | 134 G | 826                   | 328                | 2106          | 88                 | 6.2                      | 35.32       | US  | 5999110803210 |
| 51F350      | 16.5L-16.10SL     | 10       | 138 B | 1037                  | 18                 | 2359          | 30                 | 2.5                      | 46.22       | US  | 5999110803227 |

## FARM SPECIALIST F-2

### Front Tractor, Field Equipment

The Farm Specialist F-2 tire is a proven tire for front steering 2-wheel drive tractor applications. Its 3 rib design is optimal for steering response in loose and cultivated soils and has added stability with its wide center and shoulder ribs. Made in the USA.



| Item Number | Size          | Star/PLY | LI/SI | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (Kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Weight (kg) | CoO | EAN           |
|-------------|---------------|----------|-------|-----------------------|--------------------|---------------|--------------------|--------------------------|-------------|-----|---------------|
| 52F230      | 4.00-15SL F-2 | 4        | 62 A8 | 617.2                 | 111.8              | 265           | 40                 | 3.6                      | 4.15        | US  | 5999110825748 |
| 52F290      | 7.5L-15SL F-2 | 6        | 93 A8 | 739.1                 | 203.2              | 650           | 40                 | 3                        | 12.4        | US  | 5999110825168 |

## FARM SPECIALIST F-3

### Front Tractor, Wagons, Balers, Spreaders, Seeders, And Feed Yard Mixers

Primarily used on front tractor steering applications, the Farm Specialist F-3 tire offers a rugged and heavier tread construction for resistance to chipping, cracking and rib tearing. Its tightly grooved zig-zag tread is designed for turf protection and engineered to channel water in wet terrain. Made in the USA.




| Item Number | Size     | Star/PLY | LI/SI | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (Kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Weight (kg) | CoO | EAN           |
|-------------|----------|----------|-------|-----------------------|--------------------|---------------|--------------------|--------------------------|-------------|-----|---------------|
| 565315      | 11.00-16 | 10       |       | 839                   | 280                | 1121          | 25                 | 3.6                      | 25.06       | US  | 5999110803302 |

## FARM SPECIALIST HF-1

### Wagons, Balers Spreaders, Seeders & Feed Yard Mixers

The Farm Specialist HF-1 implement tire is designed for higher performance applications with heavier loads and when high flotation is needed. Tough compound used for higher performance on wagons, tankers, seeders, balers and other flotation devices. Made in the USA.

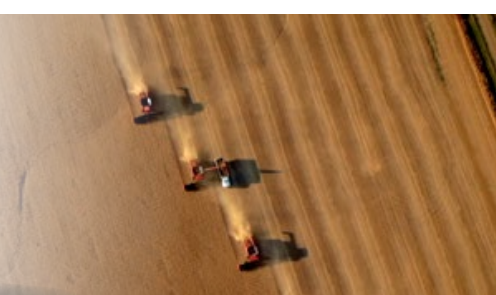

| Item Number | Size                 | Star/PLY | LI/SI | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (Kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Weight (kg) | CoO | EAN           |
|-------------|----------------------|----------|-------|-----------------------|--------------------|---------------|--------------------|--------------------------|-------------|-----|---------------|
| 51F378      | 25x7.50-15 NHS HF-1  | 6        | 88 B  | 640.1                 | 190.5              | 560           | 50                 | 3.1                      | 10.1        | US  | 5999110803234 |
| 51F395      | 27x9.50-15 NHS HF-1  | 6        | 97 B  | 685.8                 | 242.6              | 730           | 50                 | 3.1                      | 12.64       | US  | 5999110803463 |
| 51F396      | 31x13.50-15 NHS HF-1 | 6        | 106 B | 807.7                 | 342.9              | 950           | 50                 | 2.1                      | 24.9        | US  | 5999110803258 |
| 51F397      | 31x13.50-15 NHS HF-1 | 8        | 120 B | 807.7                 | 350.5              | 1188          | 50                 | 3.1                      | 26.68       | US  | 5999110825175 |
| 6A0969      | 31x13.50-15 IMP      | 8        | 114 B | 777.2                 | 353.1              | 1180          | 50                 | 3.1                      | 25.4        | US  | 5999110830377 |
| 51F307      | 31x13.50-15 NHS HF-1 | 10       | 120 B | 812.8                 | 355.6              | 1400          | 50                 | 4.15                     | 28.73       | US  | 5999110825663 |
| 570060      | 31x13.50-15 NHS HF-1 | 12       | 124 B | 815.6                 | 369.3              | 1600          | 50                 | 5.2                      | 30.76       | US  | 5999110803326 |

## FARM SPECIALIST R-1

### Compact Utility Tractors

Used primarily on compact utility tractors, the Farm Specialist R-1 tire features an overlapping center tread lug that performs in both wet and dry conditions. The all-purpose tire features a unique multi-angle long bar tread for aggressive performance, excellent traction and lateral stability. Made in the USA.



| Item Number | Size      | Star/PLY | LI/SI  | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (Kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Weight (kg) | CoO | EAN           |
|-------------|-----------|----------|--------|-----------------------|--------------------|---------------|--------------------|--------------------------|-------------|-----|---------------|
| 6E0030      | 150/90-12 | 6        | 69 A6  | 584.2                 | 154.9              | 325           | 30                 | 2.75                     | 8.2         | US  | 5999110800462 |
| 570000      | 7-14      | 6        | 80 A8  | 688.3                 | 188                | 450           | 40                 | 2.5                      | 12.07       | US  | 5999110803630 |
| 570001      | 7-16      | 6        | 84 A8  | 756.9                 | 185.4              | 500           | 40                 | 2.5                      | 12.7        | US  | 5999110803647 |
| 6E0002      | 215/90-16 | 6        | 91 A8  | 797.6                 | 213.4              | 615           | 40                 | 1.9                      | 17.9        | US  | 5999110800424 |
| 570003      | 240/90-16 | 6        | 92 A8  | 850.9                 | 254                | 630           | 40                 | 2.1                      | 25.08       | US  | 5999110800431 |
| 570006      | 11.2-24   | 6        | 106 A8 | 1103.4                | 292.1              | 950           | 40                 | 1.8                      | 40.4        | US  | 5999110803609 |
| 6A0429      | 14.9-24   | 6        | 119 A8 | 1257.3                | 375.9              | 1360          | 40                 | 1.4                      | 62          | US  | 5999110800400 |

## FARM SPECIALIST I-1

### Wagons, Balers Spreaders, Seeders & Feed yard Mixers

Multi rib farm tire designed for flotation for use on farm implements, wagons, tanks, carts and other pull behind vehicles.



| Item Number | Size             | Star/PLY | LI/SI  | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (Kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Weight (kg) | CoO | EAN           |
|-------------|------------------|----------|--------|-----------------------|--------------------|---------------|--------------------|--------------------------|-------------|-----|---------------|
| 518249      | 4.00-9           | 4        | 60 A8  | 442                   | 122                | 250           | 30                 | 3                        | 2.8         | US  | 5999110806006 |
| 518277      | 4.00-12          | 4        | 67 B   | 519                   | 127                | 307           | 48                 | 3                        | 3.19        | US  | 5999110825694 |
| 6E0030      | 150/90-12        | 6        | 69 A6  | 585                   | 155                | 333           | 33                 | 2.8                      | 8.2         | US  | 5999110800462 |
| 51F235      | 5.00-15SL I-1    | 4        | 79 B   | 641                   | 6                  | 431           | 30                 | 2.5                      | 24.44       | US  | 5999110825830 |
| 510361      | 26x12.00-12      | 4        | 100 B  | 648                   | 298                | 808           | 30                 | 1.4                      | 11.78       | US  | 5999110803456 |
| 510363      | 26x12.00-12      | 10       | 120 B  | 648                   | 298                | 1411          | 30                 | 3.6                      | 10.02       | US  | 5999110825793 |
| 51F252      | 5.90-15SL I-1    | 4        | 85 B   | 669                   | 7                  | 518           | 30                 | 2.5                      | 6.12        | US  | 5999110803494 |
| 51F395      | 27x9.50-15 HF-1  | 6        | 97 B   | 686                   | 243                | 731           | 48                 | 3.1                      | 13.14       | US  | 5999110803463 |
| 51F388      | 6.70-15SL I-1    | 6        | 97 B   | 717                   | 8                  | 731           | 30                 | 3                        | 9           | US  | 5999110825823 |
| 51F237      | 7.60-15SL        | 8        | 106 B  | 729                   | 8                  | 949           | 30                 | 3.6                      | 10.67       | US  | 5999110803524 |
| 51F337      | 7.60-15SL I-1    | 8        | 106 B  | 729                   | 8                  | 949           | 30                 | 3.6                      | 10.93       | US  | 5999110803517 |
| 51F399      | 9.5L-14SL I-1    | 8        | 111 B  | 747                   | 10                 | 1089          | 30                 | 3                        | 13.54       | US  | 5999110803548 |
| 51F391      | 11L-14SL I-1     | 8        | 112 B  | 752                   | 11                 | 1121          | 30                 | 2.5                      | 14.6        | US  | 5999110825533 |
| 51F3D7      | 9.5L-15SL I-1    | 12       | 119 B  | 760                   | 10                 | 1361          | 30                 | 4.4                      | 13.88       | US  | 5999110803562 |
| 51F344      | 9.5L-15SL I-1    | 8        | 112 B  | 760                   | 10                 | 1121          | 30                 | 3                        | 12.04       | US  | 5999110803586 |
| 51F317      | 11L-15SL I-1     | 12       | 121 B  | 778                   | 272                | 1452          | 48                 | 3.6                      | 18.88       | US  | 5999110803395 |
| 51F318      | 11L-15SL I-1     | 8        |        | 778                   | 12                 | 1153          | 30                 | 2.5                      | 17.87       | US  | 5999110826011 |
| 6E0002      | 215/90-16        | 6        | 91 A8  | 798                   | 214                | 617           | 41                 | 1.9                      | 17.9        | US  | 5999110800424 |
| 5EF397      | 31x13.50-15 HF-1 | 8        |        | 808                   | 351                | 1189          | 48                 | 3.1                      | 26.76       | US  | 5999110800387 |
| 51F307      | 31x13.50-15 HF-1 | 10       | 120 B  | 813                   | 356                | 1398          | 48                 | 4.1                      | 28.8        | US  | 5999110825663 |
| 6A0561      | 12.5L-15FI       | LR D     | 126 G  | 815                   | 321                | 1683          | 88                 | 4.1                      | 27.76       | US  | 5999110825199 |
| 510130      | 18.00x16         | 10       |        | 826                   | 432                | 1896          | 49                 | 2.2                      | 32.6        | US  | 5999110825991 |
| 51F305      | 12.5L-15SL I-1   | 12       | 127 B  | 829                   | 13                 | 1751          | 30                 | 3.6                      | 27          | US  | 5999110825311 |
| 51F385      | 10.00-15SL I-1   | 8        | 121 B  | 849                   | 11                 | 1452          | 30                 | 2.8                      | 21.05       | US  | 5999110825762 |
| 510131      | 14L-16.1SL I-1   | 8        | 124 B  | 941                   | 365                | 1597          | 48                 | 1.9                      | 31.07       | US  | 5999110803418 |
| 6A0477      | 16.5-16.1SL I-1  | 14       | 145 B  | 1034                  | 435                | 2903          | 48                 | 3.3                      | 58.06       | US  | 5999110803425 |
| 6A0429      | 14.9-24          | 6        | 119 A8 | 1258                  | 376                | 1361          | 40                 | 1.4                      | 62.14       | US  | 5999110800400 |

## FARM SPECIALIST TB - RC

### Tractors, Row Crop Applications

This is the Row Crop version of the Farm Specialist Tractor Bias tire with the equivalent performance.



| Item Number | Size   | Star/PLY | LI/SI | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (Kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Weight (kg) | CoO | EAN           |
|-------------|--------|----------|-------|-----------------------|--------------------|---------------|--------------------|--------------------------|-------------|-----|---------------|
| 6X10683     | 9.5-24 | 8        | 112A6 | 1056                  | 232                | 1000          | 40                 | 2.8                      | 25.78       | IN  | 5999110824116 |
| 6X10693     | 9.5-32 | 8        | 116A6 | 1255                  | 235                | 1120          | 40                 | 2.8                      | 33          | IN  | 5999110824123 |
| 6X10703     | 9.5-36 | 8        | 118A6 | 1355                  | 241                | 1180          | 40                 | 2.8                      | 40          | IN  | 5999110824130 |

## FARM SPECIALIST TB

### Tractors, General Application

Farm Specialist Tractor Bias tire is a multi-angled, curved lug bars traction tire with good self-cleaning and rider comfort. Strong and sturdy body plies for durability, cut and crack-resistant tread compound for longer service life.




| Rim Ø (inch) | Product code | Size       | Ply rating | LI/SI       | Monted Diameter (mm) | Mounted Width (mm) | Rim Width (inch) | Static Loaded Radius (mm) | Rolling Circumference (mm) | Rated Load (kg) | Rated speed (km/h) | Inflation Pressure (bar) | Weight (kg) | Tread Depth (mm) | Origin |
|--------------|--------------|------------|------------|-------------|----------------------|--------------------|------------------|---------------------------|----------------------------|-----------------|--------------------|--------------------------|-------------|------------------|--------|
| 24           | 6X15293      | 8.3-24 TT  | 8          | 105A6/101A8 | 995                  | 211                | W7               | 469                       | 2925                       | 925             | 30                 | 3.1                      | 25.8        | 26               | IND    |
|              | 6X12283      | 9.5-24 TT  | 8          | 112A6/108A8 | 1056                 | 232                | W8               | 495                       | 3105                       | 1120            | 30                 | 2.8                      | 25.8        | 26               | IND    |
|              | 6X12293      | 11.2-24 TT | 8          | 116A6/112A8 | 1105                 | 284                | W10              | 515                       | 3249                       | 1250            | 30                 | 2.4                      | 32.5        | 32               | IND    |
|              | 6X12303      | 12.4-24 TT | 8          | 121A6/117A8 | 1160                 | 315                | W11              | 539                       | 3410                       | 1450            | 30                 | 2.3                      | 40          | 34               | IND    |
|              | 6X12313      | 13.6-24 TT | 8          | 123A6/120A8 | 1209                 | 345                | W12              | 559                       | 3556                       | 1550            | 30                 | 1.9                      | 49.2        | 27               | IND    |
|              | 6X12323      | 14.9-24 TT | 8          | 128A6/124A8 | 1265                 | 378                | W13              | 583                       | 3710                       | 1800            | 30                 | 1.8                      | 56.8        | 36               | IND    |
| 26           | 6X15303      | 23.1-26 TL | 12         | 153A6/149A8 | 1605                 | 587                | 20.0             | 738                       | 4751                       | 3650            | 30                 | 1.7                      | 152         | 43               | IND    |
| 28           | 6X12343      | 11.2-28 TT | 8          | 118A6/114A8 | 1205                 | 284                | W10              | 563                       | 3530                       | 1320            | 30                 | 2.4                      | 36.8        | 32               | IND    |
|              | 6X12353      | 12.4-28 TT | 8          | 123A6/120A8 | 1260                 | 315                | W11              | 589                       | 3704                       | 1550            | 30                 | 2.3                      | 45.5        | 34               | IND    |
|              | 6X12363      | 13.6-28 TT | 8          | 125A6/121A8 | 1310                 | 345                | W12              | 610                       | 3851                       | 1650            | 30                 | 2                        | 56.7        | 29               | IND    |
|              | 6X12373      | 14.9-28 TT | 8          | 130A6/126A8 | 1365                 | 378                | W13              | 634                       | 4013                       | 1900            | 30                 | 1.8                      | 67.6        | 36               | IND    |
| 30           | 6X12453      | 16.9-30 TT | 12         | 144A6/140A8 | 1485                 | 529                | W15L             | 685                       | 4381                       | 2800            | 30                 | 2.4                      | 83.5        | 38               | IND    |
|              | 6X12463      | 18.4-30 TT | 10         | 145A6/141A8 | 1545                 | 467                | W16L             | 714                       | 4542                       | 2900            | 30                 | 1.8                      | 95          | 38.5             | IND    |
| 32           | 6X15273      | 8.3-32 TT  | 6          | 105A6/101A8 | 1195                 | 211                | W7               | 572                       | 3585                       | 925             | 30                 | 2.4                      | 27.3        | 29.2             | IND    |
|              | 6X15313      | 12.4-32 TT | 10         | 128A6/124A8 | 1360                 | 325                | W11              | 639                       | 3998                       | 1800            | 30                 | 2.5                      | 57          | 34               | IND    |
| 34           | 6X15323      | 16.9-34 TT | 10         | 142A6/138A8 | 1585                 | 429                | W15L             | 735                       | 4650                       | 2650            | 30                 | 2                        | 90.7        | 38               | IND    |
|              | 6X12473      | 18.4-34 TT | 10         | 142A6/137A8 | 1650                 | 467                | W16L             | 762                       | 4850                       | 2650            | 30                 | 1.8                      | 103.8       | 38.5             | IND    |
| 36           | 6X15283      | 8.3-36 TT  | 6          | 107A6/103A8 | 1295                 | 211                | W7               | 596                       | 3820                       | 975             | 30                 | 2.4                      | 34.5        | 26               | IND    |
|              | 6X15333      | 12.4-36 TT | 10         | 131A6/127A8 | 1465                 | 315                | W11              | 686                       | 4318                       | 1950            | 30                 | 2.9                      | 54.3        | 30               | IND    |
|              | 6X15343      | 13.6-36 TT | 6          | 125A6/121A8 | 1515                 | 345                | W12              | 710                       | 4445                       | 1650            | 30                 | 1.5                      | 60.5        | 30               | IND    |
| 38           | 6X15353      | 16.9-38 TT | 10         | 143A6/139A8 | 1685                 | 429                | W15L             | 788                       | 4954                       | 2725            | 30                 | 2.1                      | 98          | 38               | IND    |
|              | 6X12483      | 18.4-38 TT | 10         | 143A6/139A8 | 1750                 | 467                | W16L             | 812                       | 5163                       | 2725            | 30                 | 1.4                      | 114         | 38.5             | IND    |

## FARM SPECIALIST TR - II BIG VOLUME, HARVESTER

### Variuos Farming, Large Tractor Applications

The FSTR-II is a line of R1-W radial tires with rim diameters ranging from a 16" to 48". The radial construction of these tires will deliver the traction and smooth ride for farmers to increase their efficiency in the field.

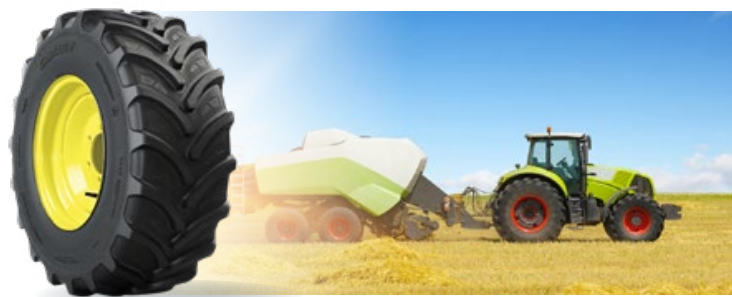

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |       |       |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-------|-------|
| 26"   | 6X11861                | 750/65R26 158A8/158B TL | 761                | 1600                   | 710                     | 4761                       | DW25B            | 217              | 46               |       |       |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |       |       |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8   | 3.2   |
|       | Static                 | 5470                    | 6450               | 7330                   | 8210                    | 8990                       | 9775             |                  |                  |       |       |
|       | 10 km/h                | 3570                    | 4210               | 4780                   | 5355                    | 5865                       | 6375             |                  |                  |       |       |
|       | 25 km/h                | 2640                    | 3110               | 3540                   | 3960                    | 4340                       | 4720             |                  |                  |       |       |
|       | 30 km/h                | 2550                    | 3000               | 3410                   | 3820                    | 4180                       | 4550             |                  |                  |       |       |
|       | 40 km/h                | 2380                    | 2805               | 3190                   | 3570                    | 3910                       | 4250             |                  |                  |       |       |
|       | 50 km/h                | 2380                    | 2805               | 3190                   | 3570                    | 3910                       | 4250             |                  |                  |       |       |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |       |       |
| 26"   | 6X11871                | 750/65R26 166A8/166B TL | 761                | 1600                   | 710                     | 4761                       | DW25B            | 223              | 46               |       |       |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |       |       |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8   | 3.2   |
|       | Static                 | 5470                    | 6450               | 7330                   | 8210                    | 8990                       | 9775             | 10850            | 12190            |       |       |
|       | 10 km/h                | 3570                    | 4210               | 4780                   | 5355                    | 5865                       | 6375             | 7075             | 7950             |       |       |
|       | 25 km/h                | 2640                    | 3110               | 3540                   | 3960                    | 4340                       | 4720             | 5235             | 5880             |       |       |
|       | 30 km/h                | 2550                    | 3000               | 3410                   | 3820                    | 4180                       | 4550             | 5050             | 5670             |       |       |
|       | 40 km/h                | 2380                    | 2805               | 3190                   | 3570                    | 3910                       | 4250             | 4720             | 5300             |       |       |
|       | 50 km/h                | 2380                    | 2805               | 3190                   | 3570                    | 3910                       | 4250             | 4720             | 5300             |       |       |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |       |       |
| 26"   | 6X11841                | 620/75R26 166A8/166B TL | 641                | 1605                   | 722                     | 4778                       | DW20B            | 186              | 45               |       |       |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |       |       |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8   | 3.2   |
|       | Static                 | 4510                    | 5360               | 6095                   | 6825                    | 7435                       | 8045             | 9140             | 10240            | 11215 | 12190 |
|       | 10 km/h                | 2940                    | 3500               | 3975                   | 4450                    | 4850                       | 5250             | 5960             | 6680             | 7310  | 7950  |
|       | 25 km/h                | 2180                    | 2590               | 2940                   | 3290                    | 3590                       | 3880             | 4410             | 4940             | 5410  | 5880  |
|       | 30 km/h                | 2100                    | 2495               | 2835                   | 3175                    | 3460                       | 3740             | 4250             | 4760             | 5220  | 5670  |
|       | 40 km/h                | 1960                    | 2330               | 2650                   | 2970                    | 3230                       | 3500             | 3975             | 4450             | 4875  | 5300  |
|       | 50 km/h                | 1960                    | 2330               | 2650                   | 2970                    | 3230                       | 3500             | 3975             | 4450             | 4875  | 5300  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |       |       |
| 32"   | 6X11851                | 650/75R32 172A8/172B TL | 658                | 1796                   | 810                     | 5362                       | DW21B            | 254              | 48               |       |       |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |       |       |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8   | 3.2   |
|       | Static                 | 5515                    | 6520               | 7395                   | 8270                    | 9025                       | 9780             | 11155            | 12535            | 13330 | 14490 |
|       | 10 km/h                | 3600                    | 4250               | 4820                   | 5395                    | 5885                       | 6380             | 7275             | 8175             | 8690  | 9450  |
|       | 25 km/h                | 2660                    | 3145               | 3570                   | 3990                    | 4355                       | 4720             | 5380             | 6050             | 6430  | 6990  |
|       | 30 km/h                | 2565                    | 3030               | 3440                   | 3850                    | 4200                       | 4550             | 5190             | 5830             | 6200  | 6740  |
|       | 40 km/h                | 2400                    | 2830               | 3215                   | 3600                    | 3920                       | 4250             | 4850             | 5450             | 5795  | 6300  |
|       | 50 km/h                | 2400                    | 2830               | 3215                   | 3600                    | 3920                       | 4250             | 4850             | 5450             | 5795  | 6300  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |       |       |


| Rim Ø | Item number            | Description               | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |       |       |
|-------|------------------------|---------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-------|-------|
| 32"   | 6X11751                | 800/65R32 172A8/172B TL   | 797                | 1833                   | 820                     | 5460                       | DW25B            | 304              | 57               |       |       |
|       | Max Load (kg)          |                           |                    |                        |                         |                            |                  |                  |                  |       |       |
|       | Speed \ Pressure (bar) | 0.6                       | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8   | 3.2   |
|       | Static                 | 7020                      | 8270               | 9400                   | 10530                   | 11530                      | 12535            | 12895            | 14490            |       |       |
|       | 10 km/h                | 4580                      | 5395               | 6130                   | 6870                    | 7520                       | 8175             | 8410             | 9450             |       |       |
|       | 25 km/h                | 3390                      | 3990               | 4540                   | 5080                    | 5565                       | 6050             | 6220             | 6990             |       |       |
|       | 30 km/h                | 3265                      | 3850               | 4370                   | 4900                    | 5365                       | 5830             | 6000             | 6740             |       |       |
|       | 40 km/h                | 3050                      | 3600               | 4090                   | 4580                    | 5010                       | 5450             | 5610             | 6300             |       |       |
|       | 50 km/h                | 3050                      | 3600               | 4090                   | 4580                    | 5010                       | 5450             | 5610             | 6300             |       |       |
|       | 65 km/h                |                           |                    |                        |                         |                            |                  |                  |                  |       |       |
| 32"   | 6X11761                | 800/65R32 178A8/178B TL   | 797                | 1833                   | 820                     | 5460                       | DW27B            | 310              | 57               |       |       |
|       | Max Load (kg)          |                           |                    |                        |                         |                            |                  |                  |                  |       |       |
|       | Speed \ Pressure (bar) | 0.6                       | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8   | 3.2   |
|       | Static                 | 7020                      | 8270               | 9400                   | 10530                   | 11530                      | 12535            | 12895            | 14490            | 15870 | 17250 |
|       | 10 km/h                | 4580                      | 5395               | 6130                   | 6870                    | 7520                       | 8175             | 8410             | 9450             | 10350 | 11250 |
|       | 25 km/h                | 3390                      | 3990               | 4540                   | 5080                    | 5565                       | 6050             | 6220             | 6990             | 7660  | 8325  |
|       | 30 km/h                | 3265                      | 3850               | 4370                   | 4900                    | 5365                       | 5830             | 6000             | 6740             | 7380  | 8025  |
|       | 40 km/h                | 3050                      | 3600               | 4090                   | 4580                    | 5010                       | 5450             | 5610             | 6300             | 6900  | 7500  |
|       | 50 km/h                | 3050                      | 3600               | 4090                   | 4580                    | 5010                       | 5450             | 5610             | 6300             | 6900  | 7500  |
|       | 65 km/h                |                           |                    |                        |                         |                            |                  |                  |                  |       |       |
| 32"   | 6X11771                | IF800/65R32 181B/181D TL  | 797                | 1833                   | 820                     | 5460                       | DW28B            | 327              | 57               |       |       |
|       | Max Load (kg)          |                           |                    |                        |                         |                            |                  |                  |                  |       |       |
|       | Speed \ Pressure (bar) | 0.6                       | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8   | 3.2   |
|       | Static                 | 7020                      | 8350               | 9490                   | 10625                   | 11575                      | 12520            | 14230            | 15940            | 17460 | 18975 |
|       | 10 km/h                | 4580                      | 5445               | 6190                   | 6930                    | 7550                       | 8170             | 9280             | 10395            | 11385 | 12375 |
|       | 25 km/h                | 3390                      | 4030               | 4580                   | 5130                    | 5585                       | 6040             | 6870             | 7690             | 8425  | 9160  |
|       | 30 km/h                | 3265                      | 3880               | 4410                   | 4940                    | 5385                       | 5825             | 6620             | 7415             | 8120  | 8830  |
|       | 40 km/h                | 3140                      | 3740               | 4250                   | 4760                    | 5180                       | 5610             | 6370             | 7140             | 7820  | 8500  |
|       | 50 km/h                | 3050                      | 3630               | 4125                   | 4620                    | 5030                       | 5445             | 6190             | 6930             | 7590  | 8250  |
|       | 65 km/h                | 3050                      | 3630               | 4125                   | 4620                    | 5030                       | 5445             | 6190             | 6930             | 7590  | 8250  |
| 32"   | 6X11801                | IF1050/50R32 185B/185D TL | 1038               | 1863                   | 833                     | 5686                       | 36.0 VA          | 371              | 40               |       |       |
|       | Max Load (kg)          |                           |                    |                        |                         |                            |                  |                  |                  |       |       |
|       | Speed \ Pressure (bar) | 0.6                       | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8   | 3.2   |
|       | Static                 | 9360                      | 11060              | 12550                  | 14040                   | 15320                      | 16595            | 17460            | 18935            | 18975 | 21275 |
|       | 10 km/h                | 6105                      | 7215               | 8185                   | 9160                    | 9990                       | 10820            | 11385            | 12350            | 12375 | 13875 |
|       | 25 km/h                | 4520                      | 5340               | 6060                   | 6780                    | 7390                       | 8010             | 8425             | 9140             | 9160  | 10270 |
|       | 30 km/h                | 4355                      | 5150               | 5840                   | 6530                    | 7125                       | 7720             | 8120             | 8810             | 8830  | 9900  |
|       | 40 km/h                | 4190                      | 4950               | 5620                   | 6290                    | 6860                       | 7430             | 7820             | 8480             | 8500  | 9530  |
|       | 50 km/h                | 4070                      | 4810               | 5460                   | 6105                    | 6660                       | 7215             | 7590             | 8230             | 8250  | 9250  |
|       | 65 km/h                | 4070                      | 4810               | 5460                   | 6105                    | 6660                       | 7215             | 7590             | 8230             | 8250  | 9250  |
| 32"   | 6X11781                | IF900/60R32 185B/185D TL  | 891                | 1910                   | 855                     | 5688                       | DW31B            | 385              | 56               |       |       |
|       | Max Load (kg)          |                           |                    |                        |                         |                            |                  |                  |                  |       |       |
|       | Speed \ Pressure (bar) | 0.6                       | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8   | 3.2   |
|       | Static                 | 7870                      | 9360               | 10640                  | 11910                   | 12980                      | 14040            | 15955            | 17870            | 19570 | 21275 |
|       | 10 km/h                | 5130                      | 6105               | 6940                   | 7770                    | 8460                       | 9160             | 10405            | 11655            | 12765 | 13875 |
|       | 25 km/h                | 3800                      | 4520               | 5130                   | 5750                    | 6260                       | 6780             | 7700             | 8625             | 9445  | 10270 |
|       | 30 km/h                | 3660                      | 4355               | 4950                   | 5540                    | 6040                       | 6530             | 7420             | 8310             | 9105  | 9900  |
|       | 40 km/h                | 3525                      | 4190               | 4760                   | 5335                    | 5810                       | 6290             | 7145             | 8000             | 8765  | 9530  |
|       | 50 km/h                | 3420                      | 4070               | 4625                   | 5180                    | 5640                       | 6105             | 6940             | 7770             | 8510  | 9250  |
|       | 65 km/h                | 3420                      | 4070               | 4625                   | 5180                    | 5640                       | 6105             | 6940             | 7770             | 8510  | 9250  |

| Rim Ø   | Item number            | Description              | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|---------|------------------------|--------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 38"     | 6X11791                | IF800/70R38 184B/184D TL | 805                | 2085                   | 927                     | 6190                       | DW27B            | 398              | 60               |     |     |
|         | Max Load (kg)          |                          |                    |                        |                         |                            |                  |                  |                  |     |     |
|         | Speed \ Pressure (bar) | 0.6                      | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|         | Static                 | 9110                     | 10760              | 12210                  | 13660                   | 14900                      | 16145            | 18420            | 20700            |     |     |
|         | 10 km/h                | 5940                     | 7020               | 7965                   | 8910                    | 9720                       | 10530            | 12015            | 13500            |     |     |
|         | 25 km/h                | 4395                     | 5195               | 5890                   | 6590                    | 7190                       | 7790             | 8890             | 9990             |     |     |
|         | 30 km/h                | 4240                     | 5010               | 5680                   | 6355                    | 6930                       | 7510             | 8570             | 9630             |     |     |
|         | 40 km/h                | 4080                     | 4820               | 5470                   | 6120                    | 6670                       | 7230             | 8250             | 9270             |     |     |
|         | 50 km/h                | 3960                     | 4680               | 5310                   | 5940                    | 6480                       | 7020             | 8010             | 9000             |     |     |
| 65 km/h | 3960                   | 4680                     | 5310               | 5940                   | 6480                    | 7020                       | 8010             | 9000             |                  |     |     |

## FARM SPECIALIST TR - II 65 SERIES

### Variuos Farming, Tractor Applications

Superior radial construction for optimum ground pressure distribution and low ground compaction. Good self-cleaning properties due to specially angled lugs. Excellent driving on and off-the-road. Superior tire life.

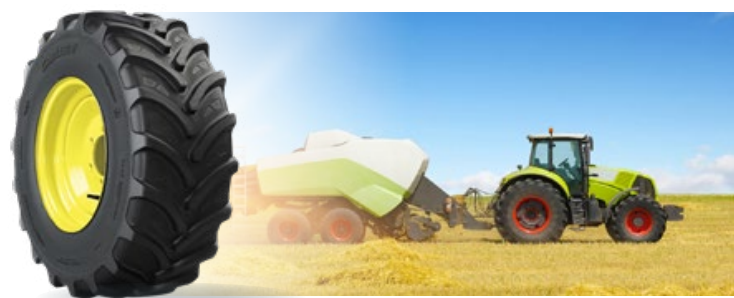

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 24"   | 6X11601                | 440/65R24 128D/131A8 TL | 437                | 1190                   | 530                     | 3556                       | W14L             | 75               | 45               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2510                    | 2960               | 3360                   | 3770                    | 4125                       | 4485             |                  |                  |     |     |
|       | 10 km/h                | 1640                    | 1930               | 2190                   | 2460                    | 2690                       | 2925             |                  |                  |     |     |
|       | 25 km/h                | 1210                    | 1430               | 1620                   | 1820                    | 1990                       | 2165             |                  |                  |     |     |
|       | 30 km/h                | 1170                    | 1380               | 1565                   | 1750                    | 1920                       | 2090             |                  |                  |     |     |
|       | 40 km/h                | 1090                    | 1290               | 1460                   | 1640                    | 1790                       | 1950             |                  |                  |     |     |
|       | 50 km/h                | 1040                    | 1230               | 1395                   | 1565                    | 1710                       | 1890             |                  |                  |     |     |
|       | 65 km/h                | 990                     | 1170               | 1330                   | 1490                    | 1630                       | 1800             |                  |                  |     |     |
| 24"   | 6X11621                | 480/65R24 133D/136A8 TL | 469                | 1224                   | 541                     | 3653                       | W15L             | 83               | 46               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2880                    | 3410               | 3890                   | 4370                    | 4740                       | 5150             |                  |                  |     |     |
|       | 10 km/h                | 1880                    | 2220               | 2540                   | 2850                    | 3090                       | 3360             |                  |                  |     |     |
|       | 25 km/h                | 1390                    | 1645               | 1880                   | 2110                    | 2290                       | 2485             |                  |                  |     |     |
|       | 30 km/h                | 1340                    | 1585               | 1810                   | 2030                    | 2205                       | 2400             |                  |                  |     |     |
|       | 40 km/h                | 1250                    | 1480               | 1690                   | 1900                    | 2060                       | 2240             |                  |                  |     |     |
|       | 50 km/h                | 1195                    | 1420               | 1615                   | 1840                    | 1970                       | 2165             |                  |                  |     |     |
|       | 65 km/h                | 1140                    | 1350               | 1540                   | 1750                    | 1875                       | 2060             |                  |                  |     |     |

| Rim<br>Ø | Item number | Description             | Section<br>Width<br>(mm) | Outsider<br>Diameter<br>(mm) | Static Load<br>Radius<br>(mm) | Rolling<br>Circum-<br>ference<br>(mm) | Recom.<br>Rim<br>Width | Tire Weight<br>(kg) | Tread Depth<br>(mm) |
|----------|-------------|-------------------------|--------------------------|------------------------------|-------------------------------|---------------------------------------|------------------------|---------------------|---------------------|
| 24"      | 6X11641     | 540/65R24 140D/143A8 TL | 540                      | 1316                         | 585                           | 3918                                  | W16L                   | 114,5               | 48                  |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
| 28"      | 6X11611     | 440/65R28 131D/134A8 TL | 439                      | 1288                         | 579                           | 3862                                  | W14L                   | 84                  | 45                  |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
| 28"      | 6X11631     | 480/65R28 136D/139A8 TL | 466                      | 1336                         | 593                           | 4002                                  | W15L                   | 92                  | 46                  |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
| 28"      | 6X11651     | 540/65R28 142D/145A8 TL | 533                      | 1424                         | 631                           | 4257                                  | W16L                   | 128                 | 48                  |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
| 28"      | 6X11691     | 600/65R28 147D/150A8 TL | 593                      | 1486                         | 652                           | 4364                                  | W18L                   | 143                 | 49                  |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |
|          |             |                         |                          |                              |                               |                                       |                        |                     |                     |

# Farm Specialist TR-II 65 Series

| Rim Ø | Item number | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |     |
|-------|-------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|-----|
| 30"   | 6X11661     | 540/65R30 143D/146A8 TL | 535                | 1477                   | 653                     | 4422                       | W16L             | 135              | 48               |     |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 |
|       |             | Static                  | 3860               | 4550                   | 5175                    | 5795                       | 6350             | 6900             |                  |     |     |     |
|       |             | 10 km/h                 | 2520               | 2970                   | 3375                    | 3780                       | 4140             | 4500             |                  |     |     |     |
|       |             | 25 km/h                 | 1860               | 2200                   | 2500                    | 2800                       | 3060             | 3330             |                  |     |     |     |
|       |             | 30 km/h                 | 1800               | 2120                   | 2410                    | 2700                       | 2950             | 3210             |                  |     |     |     |
|       |             | 40 km/h                 | 1680               | 1980                   | 2250                    | 2520                       | 2760             | 3000             |                  |     |     |     |
|       |             | 50 km/h                 | 1605               | 1890                   | 2155                    | 2405                       | 2635             | 2860             |                  |     |     |     |
|       |             | 65 km/h                 | 1530               | 1800                   | 2050                    | 2290                       | 2510             | 2725             |                  |     |     |     |
| 34"   | 6X11671     | 540/65R34 145D/148A8 TL | 539                | 1581                   | 716                     | 4746                       | W16L             | 138              | 48               |     |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 |
|       |             | Static                  | 4140               | 4890                   | 5580                    | 6270                       | 6665             | 7245             |                  |     |     |     |
|       |             | 10 km/h                 | 2700               | 3190                   | 3640                    | 4090                       | 4350             | 4725             |                  |     |     |     |
|       |             | 25 km/h                 | 1995               | 2360                   | 2690                    | 3020                       | 3220             | 3500             |                  |     |     |     |
|       |             | 30 km/h                 | 1920               | 2270                   | 2595                    | 2915                       | 3100             | 3370             |                  |     |     |     |
|       |             | 40 km/h                 | 1800               | 2125                   | 2425                    | 2725                       | 2900             | 3150             |                  |     |     |     |
|       |             | 50 km/h                 | 1720               | 2025                   | 2320                    | 2625                       | 2770             | 3045             |                  |     |     |     |
|       |             | 65 km/h                 | 1640               | 1930                   | 2210                    | 2500                       | 2640             | 2900             |                  |     |     |     |
| 34"   | 6X11701     | 600/65R34 151D/154A8 TL | 539                | 1581                   | 716                     | 4746                       | W18L             | 138              | 48               |     |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 |
|       |             | Static                  | 4780               | 5650                   | 6450                    | 7245                       | 7935             | 8625             |                  |     |     |     |
|       |             | 10 km/h                 | 3120               | 3685                   | 4205                    | 4725                       | 5175             | 5625             |                  |     |     |     |
|       |             | 25 km/h                 | 2310               | 2730                   | 3110                    | 3500                       | 3830             | 4160             |                  |     |     |     |
|       |             | 30 km/h                 | 2225               | 2630                   | 3000                    | 3370                       | 3690             | 4010             |                  |     |     |     |
|       |             | 40 km/h                 | 2080               | 2460                   | 2800                    | 3150                       | 3450             | 3750             |                  |     |     |     |
|       |             | 50 km/h                 | 1985               | 2345                   | 2680                    | 3045                       | 3295             | 3625             |                  |     |     |     |
|       |             | 65 km/h                 | 1890               | 2235                   | 2550                    | 2900                       | 3140             | 3450             |                  |     |     |     |
| 38"   | 6X11681     | 540/65R38 147D/150A8 TL | 539                | 1682                   | 759                     | 5058                       | W16L             | 151              | 48               |     |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 |
|       |             | Static                  | 4315               | 5085                   | 5780                    | 6470                       | 7090             | 7705             |                  |     |     |     |
|       |             | 10 km/h                 | 2810               | 3320                   | 3770                    | 4220                       | 4620             | 5025             |                  |     |     |     |
|       |             | 25 km/h                 | 2080               | 2450                   | 2790                    | 3120                       | 3420             | 3720             |                  |     |     |     |
|       |             | 30 km/h                 | 2010               | 2365                   | 2690                    | 3010                       | 3300             | 3585             |                  |     |     |     |
|       |             | 40 km/h                 | 1875               | 2210                   | 2510                    | 2810                       | 3080             | 3350             |                  |     |     |     |
|       |             | 50 km/h                 | 1795               | 2110                   | 2400                    | 2690                       | 2945             | 3230             |                  |     |     |     |
|       |             | 65 km/h                 | 1710               | 2010                   | 2285                    | 2560                       | 2805             | 3075             |                  |     |     |     |
| 38"   | 6X11711     | 600/65R38 153D/156A8 TL | 604                | 1768                   | 796                     | 5311                       | W18L             | 190              | 49               |     |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 |
|       |             | Static                  | 5085               | 6010                   | 6860                    | 7705                       | 8460             | 9200             |                  |     |     |     |
|       |             | 10 km/h                 | 3320               | 3920                   | 4470                    | 5025                       | 5520             | 6000             |                  |     |     |     |
|       |             | 25 km/h                 | 2450               | 2900                   | 3310                    | 3720                       | 4085             | 4440             |                  |     |     |     |
|       |             | 30 km/h                 | 2365               | 2795                   | 3190                    | 3585                       | 3940             | 4280             |                  |     |     |     |
|       |             | 40 km/h                 | 2210               | 2610                   | 2980                    | 3350                       | 3680             | 4000             |                  |     |     |     |
|       |             | 50 km/h                 | 2110               | 2500                   | 2845                    | 3230                       | 3520             | 3835             |                  |     |     |     |
|       |             | 65 km/h                 | 2010               | 2380                   | 2710                    | 3075                       | 3350             | 3650             |                  |     |     |     |


# Farm Specialist TR-II 65 Series

| Rim Ø | Item number | Description             |      |      | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |
|-------|-------------|-------------------------|------|------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|
| 38"   | 6X11721     | 650/65R38 157D/160A8 TL |      |      | 653                | 1812                   | 815                     | 5439                       | DW20B            | 239              | 51               |     |
|       |             | Max Load (kg)           |      |      |                    |                        |                         |                            |                  |                  |                  |     |
|       |             | Speed \ Pressure (bar)  | 0.6  | 0.8  | 1                  | 1.2                    | 1.4                     | 1.6                        | 2                | 2.4              | 2.8              | 3.2 |
|       |             | Static                  | 5795 | 6830 | 7760               | 8690                   | 9520                    | 10350                      |                  |                  |                  |     |
|       |             | 10 km/h                 | 3780 | 4455 | 5060               | 5670                   | 6210                    | 6750                       |                  |                  |                  |     |
|       |             | 25 km/h                 | 2800 | 3300 | 3745               | 4195                   | 4595                    | 4995                       |                  |                  |                  |     |
|       |             | 30 km/h                 | 2700 | 3180 | 3610               | 4045                   | 4430                    | 4815                       |                  |                  |                  |     |
|       |             | 40 km/h                 | 2520 | 2970 | 3375               | 3780                   | 4140                    | 4500                       |                  |                  |                  |     |
|       |             | 50 km/h                 | 2405 | 2835 | 3225               | 3610                   | 3960                    | 4330                       |                  |                  |                  |     |
|       |             | 65 km/h                 | 2290 | 2700 | 3070               | 3440                   | 3770                    | 4125                       |                  |                  |                  |     |
| 42"   | 6X11731     | 650/65R42 158D/161A8 TL |      |      | 651                | 1921                   | 865                     | 5775                       | DW20B            | 261              | 51               |     |
|       |             | Max Load (kg)           |      |      |                    |                        |                         |                            |                  |                  |                  |     |
|       |             | Speed \ Pressure (bar)  | 0.6  | 0.8  | 1                  | 1.2                    | 1.4                     | 1.6                        | 2                | 2.4              | 2.8              | 3.2 |
|       |             | Static                  | 5960 | 7020 | 7980               | 8935                   | 9790                    | 10640                      |                  |                  |                  |     |
|       |             | 10 km/h                 | 3885 | 4580 | 5200               | 5830                   | 6380                    | 6940                       |                  |                  |                  |     |
|       |             | 25 km/h                 | 2875 | 3390 | 3850               | 4310                   | 4720                    | 5130                       |                  |                  |                  |     |
|       |             | 30 km/h                 | 2770 | 3265 | 3710               | 4160                   | 4550                    | 4950                       |                  |                  |                  |     |
|       |             | 40 km/h                 | 2590 | 3050 | 3470               | 3885                   | 4255                    | 4625                       |                  |                  |                  |     |
|       |             | 50 km/h                 | 2480 | 2920 | 3320               | 3710                   | 4065                    | 4465                       |                  |                  |                  |     |
|       |             | 65 km/h                 | 2360 | 2780 | 3160               | 3535                   | 3870                    | 4250                       |                  |                  |                  |     |
| 42"   | 6X11741     | 650/65R42 165D/168A8 TL |      |      | 651                | 1921                   | 865                     | 5775                       | DW20B            | 275              | 51               |     |
|       |             | Max Load (kg)           |      |      |                    |                        |                         |                            |                  |                  |                  |     |
|       |             | Speed \ Pressure (bar)  | 0.6  | 0.8  | 1                  | 1.2                    | 1.4                     | 1.6                        | 2                | 2.4              | 2.8              | 3.2 |
|       |             | Static                  | 5960 | 7020 | 7980               | 8935                   | 9790                    | 10640                      | 11460            | 12880            |                  |     |
|       |             | 10 km/h                 | 3885 | 4580 | 5200               | 5830                   | 6380                    | 6940                       | 7475             | 8400             |                  |     |
|       |             | 25 km/h                 | 2875 | 3390 | 3850               | 4310                   | 4720                    | 5130                       | 5530             | 6215             |                  |     |
|       |             | 30 km/h                 | 2770 | 3265 | 3710               | 4160                   | 4550                    | 4950                       | 5330             | 5990             |                  |     |
|       |             | 40 km/h                 | 2590 | 3050 | 3470               | 3885                   | 4255                    | 4625                       | 4980             | 5600             |                  |     |
|       |             | 50 km/h                 | 2480 | 2920 | 3320               | 3710                   | 4065                    | 4465                       | 4760             | 5410             |                  |     |
|       |             | 65 km/h                 | 2360 | 2780 | 3160               | 3535                   | 3870                    | 4250                       | 4535             | 5150             |                  |     |

## FARM SPECIALIST TR - II 70 SERIES

### Variuos Farming, Tractor Applications

The FSTR-II is a line of R1-W radial tires with rim diameters ranging from a 16" to 48". The radial construction of these tires will deliver the traction and smooth ride for farmers to increase their efficiency in the field.

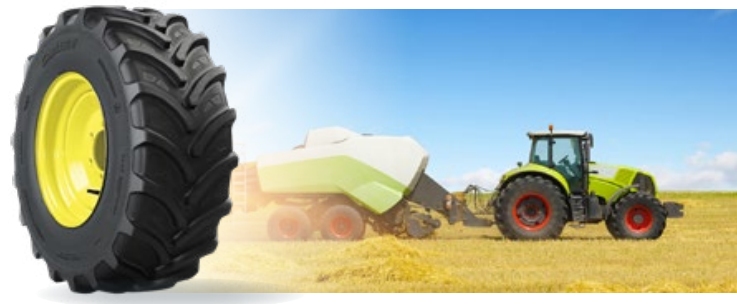

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |      |     |  |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|------|-----|--|
| 16"   | 6X11911                | 260/70R16 109A8/109B TL | 250                | 767                    | 345                     | 2293                       | W8               | 23,5             | 31               |      |     |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |     |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2 |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 2370             |                  |      |     |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 1545             |                  |      |     |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 1130             |                  |      |     |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 1100             |                  |      |     |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 1030             |                  |      |     |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 1030             |                  |      |     |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |      |     |  |
| 16"   | 6X11921                | 280/70R16 112A8/112B TL | 273                | 787                    | 357                     | 2350                       | W9               | 25,5             | 32               |      |     |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |     |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2 |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 1955             | 2290             | 2575 |     |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 1275             | 1495             | 1680 |     |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 935              | 1095             | 1230 |     |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 910              | 1070             | 1200 |     |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 850              | 1000             | 1120 |     |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 850              | 1000             | 1120 |     |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |      |     |  |
| 16"   | 6X11931                | 280/70R18 114A8/114B TL | 273                | 849                    | 385                     | 2542                       | W9               | 29               | 32               |      |     |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |     |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2 |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 2070             | 2415             | 2710 |     |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 1350             | 1575             | 1770 |     |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 990              | 1155             | 1300 |     |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 960              | 1120             | 1260 |     |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 900              | 1050             | 1180 |     |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 900              | 1050             | 1180 |     |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |      |     |  |
| 20"   | 6X11941                | 280/70R20 116A8/116B TL | 273                | 899                    | 412                     | 2698                       | W9               | 32               | 32               |      |     |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |     |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2 |  |
|       | Static                 |                         |                    |                        |                         |                            |                  |                  | 2875             |      |     |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  |                  | 1875             |      |     |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  |                  | 1375             |      |     |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  |                  | 1340             |      |     |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  |                  | 1250             |      |     |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  |                  | 1250             |      |     |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |      |     |  |

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 20"   | 6X11951                | 300/70R20 120A8/120B TL | 290                | 948                    | 427                     | 2840                       | W9               | 36               | 33               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 |                         |                    |                        |                         |                            | 2440             | 2865             | 3220             |     |     |
|       | 10 km/h                |                         |                    |                        |                         |                            | 1590             | 1870             | 2100             |     |     |
|       | 25 km/h                |                         |                    |                        |                         |                            | 1165             | 1370             | 1540             |     |     |
|       | 30 km/h                |                         |                    |                        |                         |                            | 1130             | 1330             | 1500             |     |     |
|       | 40 km/h                |                         |                    |                        |                         |                            | 1060             | 1245             | 1400             |     |     |
|       | 50 km/h                |                         |                    |                        |                         |                            | 1060             | 1245             | 1400             |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 20"   | 6X11961                | 320/70R20 123A8/123B TL | 316                | 985                    | 450                     | 2947                       | W10              | 40               | 34               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 |                         |                    |                        |                         |                            | 2645             | 3170             | 3565             |     |     |
|       | 10 km/h                |                         |                    |                        |                         |                            | 1725             | 2070             | 2325             |     |     |
|       | 25 km/h                |                         |                    |                        |                         |                            | 1265             | 1520             | 1705             |     |     |
|       | 30 km/h                |                         |                    |                        |                         |                            | 1230             | 1475             | 1660             |     |     |
|       | 40 km/h                |                         |                    |                        |                         |                            | 1150             | 1380             | 1550             |     |     |
|       | 50 km/h                |                         |                    |                        |                         |                            | 1150             | 1380             | 1550             |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 24"   | 6X11381                | 360/70R24 122A8/122B TL | 354                | 1135                   | 518                     | 3398                       | W11              | 60               | 42               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 1930                    | 2280               | 2590                   | 2900                    | 3170                       | 3450             |                  |                  |     |     |
|       | 10 km/h                | 1260                    | 1485               | 1690                   | 1890                    | 2070                       | 2250             |                  |                  |     |     |
|       | 25 km/h                | 930                     | 1100               | 1250                   | 1400                    | 1530                       | 1665             |                  |                  |     |     |
|       | 30 km/h                | 900                     | 1060               | 1200                   | 1350                    | 1480                       | 1605             |                  |                  |     |     |
|       | 40 km/h                | 840                     | 990                | 1125                   | 1260                    | 1380                       | 1500             |                  |                  |     |     |
|       | 50 km/h                | 840                     | 990                | 1125                   | 1260                    | 1380                       | 1500             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 24"   | 6X11401                | 380/70R24 125A8/125B TL | 384                | 1198                   | 533                     | 3574                       | W12              | 65               | 42               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2125                    | 2505               | 2845                   | 3190                    | 3490                       | 3795             |                  |                  |     |     |
|       | 10 km/h                | 1385                    | 1630               | 1855                   | 2080                    | 2280                       | 2475             |                  |                  |     |     |
|       | 25 km/h                | 1025                    | 1210               | 1370                   | 1540                    | 1685                       | 1830             |                  |                  |     |     |
|       | 30 km/h                | 990                     | 1165               | 1320                   | 1480                    | 1620                       | 1765             |                  |                  |     |     |
|       | 40 km/h                | 920                     | 1090               | 1240                   | 1385                    | 1520                       | 1650             |                  |                  |     |     |
|       | 50 km/h                | 920                     | 1090               | 1240                   | 1385                    | 1520                       | 1650             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 24"   | 6X11421                | 420/70R24 130A8/130B TL | 426                | 1231                   | 563                     | 3675                       | W13              | 81               | 45               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2450                    | 2880               | 3280                   | 3670                    | 4020                       | 4370             |                  |                  |     |     |
|       | 10 km/h                | 1595                    | 1880               | 2140                   | 2390                    | 2620                       | 2850             |                  |                  |     |     |
|       | 25 km/h                | 1180                    | 1390               | 1580                   | 1770                    | 1940                       | 2110             |                  |                  |     |     |
|       | 30 km/h                | 1140                    | 1340               | 1525                   | 1710                    | 1870                       | 2030             |                  |                  |     |     |
|       | 40 km/h                | 1060                    | 1250               | 1425                   | 1595                    | 1750                       | 1900             |                  |                  |     |     |
|       | 50 km/h                | 1060                    | 1250               | 1425                   | 1595                    | 1750                       | 1900             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 24"   | 6X11451                | 480/70R24 138A8/138B TL | 488                | 1314                   | 580                     | 3913                       | W15L             | 101              | 47               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 3040                    | 3580               | 4070                   | 4560                    | 4990                       | 5430             |                  |                  |     |     |
|       | 10 km/h                | 1980                    | 2335               | 2655                   | 2970                    | 3260                       | 3540             |                  |                  |     |     |
|       | 25 km/h                | 1470                    | 1730               | 1965                   | 2200                    | 2410                       | 2620             |                  |                  |     |     |
|       | 30 km/h                | 1410                    | 1670               | 1890                   | 2120                    | 2320                       | 2525             |                  |                  |     |     |
|       | 40 km/h                | 1320                    | 1560               | 1770                   | 1980                    | 2170                       | 2360             |                  |                  |     |     |
|       | 50 km/h                | 1320                    | 1560               | 1770                   | 1980                    | 2170                       | 2360             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 28"   | 6X11391                | 360/70R28 125A8/125B TL | 356                | 1258                   | 566                     | 3777                       | W11              | 67               | 42               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2125                    | 2505               | 2845                   | 3190                    | 3490                       | 3795             |                  |                  |     |     |
|       | 10 km/h                | 1385                    | 1630               | 1855                   | 2080                    | 2280                       | 2475             |                  |                  |     |     |
|       | 25 km/h                | 1025                    | 1210               | 1370                   | 1540                    | 1685                       | 1830             |                  |                  |     |     |
|       | 30 km/h                | 990                     | 1165               | 1320                   | 1480                    | 1620                       | 1765             |                  |                  |     |     |
|       | 40 km/h                | 920                     | 1090               | 1240                   | 1385                    | 1520                       | 1650             |                  |                  |     |     |
|       | 50 km/h                | 920                     | 1090               | 1240                   | 1385                    | 1520                       | 1650             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 28"   | 6X11411                | 380/70R28 127A8/127B TL | 382                | 1304                   | 589                     | 3903                       | W12              | 73               | 42               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2250                    | 2660               | 3020                   | 3380                    | 3700                       | 4025             |                  |                  |     |     |
|       | 10 km/h                | 1470                    | 1730               | 1970                   | 2205                    | 2415                       | 2625             |                  |                  |     |     |
|       | 25 km/h                | 1090                    | 1280               | 1460                   | 1630                    | 1790                       | 1940             |                  |                  |     |     |
|       | 30 km/h                | 1050                    | 1235               | 1400                   | 1570                    | 1720                       | 1870             |                  |                  |     |     |
|       | 40 km/h                | 980                     | 1155               | 1310                   | 1470                    | 1610                       | 1750             |                  |                  |     |     |
|       | 50 km/h                | 980                     | 1155               | 1310                   | 1470                    | 1610                       | 1750             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 28"   | 6X11431                | 420/70R28 133A8/133B TL | 414                | 1350                   | 597                     | 4044                       | W13              | 90               | 45               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2650                    | 3130               | 3550                   | 3980                    | 4360                       | 4740             |                  |                  |     |     |
|       | 10 km/h                | 1730                    | 2040               | 2320                   | 2595                    | 2840                       | 3090             |                  |                  |     |     |
|       | 25 km/h                | 1280                    | 1510               | 1715                   | 1920                    | 2100                       | 2290             |                  |                  |     |     |
|       | 30 km/h                | 1230                    | 1455               | 1650                   | 1850                    | 2030                       | 2200             |                  |                  |     |     |
|       | 40 km/h                | 1150                    | 1360               | 1545                   | 1730                    | 1895                       | 2060             |                  |                  |     |     |
|       | 50 km/h                | 1150                    | 1360               | 1545                   | 1730                    | 1895                       | 2060             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 28"   | 6X11461                | 480/70R28 140A8/140B TL | 477                | 1431                   | 643                     | 4279                       | W15L             | 111              | 47               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 3220                    | 3795               | 4310                   | 4830                    | 5290                       | 5750             |                  |                  |     |     |
|       | 10 km/h                | 2100                    | 2475               | 2810                   | 3150                    | 3450                       | 3750             |                  |                  |     |     |
|       | 25 km/h                | 1550                    | 1830               | 2080                   | 2330                    | 2550                       | 2775             |                  |                  |     |     |
|       | 30 km/h                | 1500                    | 1765               | 2005                   | 2250                    | 2460                       | 2675             |                  |                  |     |     |
|       | 40 km/h                | 1400                    | 1650               | 1875                   | 2100                    | 2300                       | 2500             |                  |                  |     |     |
|       | 50 km/h                | 1400                    | 1650               | 1875                   | 2100                    | 2300                       | 2500             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |

| Rim Ø | Item number | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |      |     |     |
|-------|-------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|------|-----|-----|
| 30"   | 6X11441     | 420/70R30 134A8/134B TL | 422                | 1384                   | 615                     | 4153                       | W13              | 95               | 45               |      |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |      |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4  | 2.8 | 3.2 |
|       |             | Static                  | 2730               | 3220                   | 3660                    | 4095                       | 4485             | 4875             |                  |      |     |     |
|       |             | 10 km/h                 | 1780               | 2100                   | 2385                    | 2670                       | 2925             | 3180             |                  |      |     |     |
|       |             | 25 km/h                 | 1320               | 1550                   | 1765                    | 1980                       | 2165             | 2350             |                  |      |     |     |
|       |             | 30 km/h                 | 1270               | 1500                   | 1700                    | 1905                       | 2090             | 2270             |                  |      |     |     |
|       |             | 40 km/h                 | 1190               | 1400                   | 1590                    | 1780                       | 1950             | 2120             |                  |      |     |     |
|       |             | 50 km/h                 | 1190               | 1400                   | 1590                    | 1780                       | 1950             | 2120             |                  |      |     |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |      |     |     |
| 30"   | 6X11471     | 480/70R30 141A8/141B TL | 480                | 1463                   | 653                     | 4382                       | W15L             | 117              | 47               |      |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |      |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4  | 2.8 | 3.2 |
|       |             | Static                  | 3320               | 3910                   | 4440                    | 4975                       | 5450             | 5920             |                  |      |     |     |
|       |             | 10 km/h                 | 2160               | 2550                   | 2900                    | 3245                       | 3550             | 3860             |                  |      |     |     |
|       |             | 25 km/h                 | 1600               | 1885                   | 2140                    | 2400                       | 2630             | 2860             |                  |      |     |     |
|       |             | 30 km/h                 | 1540               | 1820                   | 2065                    | 2310                       | 2535             | 2755             |                  |      |     |     |
|       |             | 40 km/h                 | 1440               | 1700                   | 1930                    | 2160                       | 2370             | 2575             |                  |      |     |     |
|       |             | 50 km/h                 | 1440               | 1700                   | 1930                    | 2160                       | 2370             | 2575             |                  |      |     |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |      |     |     |
| 30"   | 6X11501     | 520/70R30 151A8/151B TL | 522                | 1528                   | 692                     | 4572                       | W16L             | 148              | 48               |      |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |      |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4  | 2.8 | 3.2 |
|       |             | Static                  | 3735               | 4400                   | 5000                    | 5600                       | 6135             | 6670             | 7060             | 7935 |     |     |
|       |             | 10 km/h                 | 2435               | 2870                   | 3260                    | 3650                       | 4000             | 4350             | 4605             | 5175 |     |     |
|       |             | 25 km/h                 | 1800               | 2125                   | 2410                    | 2700                       | 2960             | 3220             | 3410             | 3830 |     |     |
|       |             | 30 km/h                 | 1740               | 2050                   | 2330                    | 2610                       | 2855             | 3100             | 3285             | 3690 |     |     |
|       |             | 40 km/h                 | 1620               | 1910                   | 2175                    | 2435                       | 2670             | 2900             | 3070             | 3450 |     |     |
|       |             | 50 km/h                 | 1620               | 1910                   | 2175                    | 2435                       | 2670             | 2900             | 3070             | 3450 |     |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |      |     |     |
| 30"   | 6X13961     | 600/70R30 152D/155A8 TL | 586                | 1610                   | 716                     | 4804                       | DW20B            | 179              | 51               |      |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |      |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4  | 2.8 | 3.2 |
|       |             | Static                  | 4990               | 5880                   | 6680                    | 7490                       | 8200             | 8910             |                  |      |     |     |
|       |             | 10 km/h                 | 3255               | 3835                   | 4360                    | 4880                       | 5350             | 5810             |                  |      |     |     |
|       |             | 25 km/h                 | 2410               | 2840                   | 3225                    | 3610                       | 3960             | 4300             |                  |      |     |     |
|       |             | 30 km/h                 | 2320               | 2740                   | 3110                    | 3480                       | 3815             | 4145             |                  |      |     |     |
|       |             | 40 km/h                 | 2170               | 2560                   | 2905                    | 3255                       | 3565             | 3875             |                  |      |     |     |
|       |             | 50 km/h                 | 2075               | 2445                   | 2775                    | 3110                       | 3400             | 3730             |                  |      |     |     |
|       |             | 65 km/h                 | 1975               | 2330                   | 2645                    | 2960                       | 3240             | 3550             |                  |      |     |     |
| 34"   | 6X11481     | 480/70R34 143A8/143B TL | 487                | 1571                   | 720                     | 4717                       | W15L             | 129              | 47               |      |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |      |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4  | 2.8 | 3.2 |
|       |             | Static                  | 3510               | 4140                   | 4700                    | 5265                       | 5765             | 6270             |                  |      |     |     |
|       |             | 10 km/h                 | 2290               | 2700                   | 3065                    | 3430                       | 3760             | 4090             |                  |      |     |     |
|       |             | 25 km/h                 | 1690               | 1995                   | 2270                    | 2540                       | 2780             | 3025             |                  |      |     |     |
|       |             | 30 km/h                 | 1630               | 1920                   | 2190                    | 2450                       | 2680             | 2915             |                  |      |     |     |
|       |             | 40 km/h                 | 1525               | 1800                   | 2040                    | 2290                       | 2510             | 2725             |                  |      |     |     |
|       |             | 50 km/h                 | 1525               | 1800                   | 2040                    | 2290                       | 2510             | 2725             |                  |      |     |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |      |     |     |

# Farm Specialist TR-II 70 Series

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 34"   | 6X11511                | 520/70R34 148A8/148B TL | 530                | 1639                   | 739                     | 4916                       | W16L             | 155              | 48               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 4060                    | 4780               | 5430                   | 6085                    | 6665                       | 7245             |                  |                  |     |     |
|       | 10 km/h                | 2645                    | 3120               | 3540                   | 3970                    | 4350                       | 4725             |                  |                  |     |     |
|       | 25 km/h                | 1960                    | 2310               | 2620                   | 2940                    | 3220                       | 3500             |                  |                  |     |     |
|       | 30 km/h                | 1890                    | 2225               | 2530                   | 2830                    | 3100                       | 3370             |                  |                  |     |     |
|       | 40 km/h                | 1760                    | 2080               | 2360                   | 2645                    | 2900                       | 3150             |                  |                  |     |     |
|       | 50 km/h                | 1760                    | 2080               | 2360                   | 2645                    | 2900                       | 3150             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 34"   | 6X11561                | 600/70R34 160D/163A8 TL | 586                | 1705                   | 784                     | 5107                       | DW20B            | 202              | 51               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 4930                    | 5830               | 6615                   | 7400                    | 8070                       | 8745             | 9980             | 11210            |     |     |
|       | 10 km/h                | 3220                    | 3800               | 4310                   | 4825                    | 5265                       | 5700             | 6510             | 7310             |     |     |
|       | 25 km/h                | 2380                    | 2810               | 3190                   | 3570                    | 3895                       | 4220             | 4815             | 5410             |     |     |
|       | 30 km/h                | 2295                    | 2710               | 3080                   | 3440                    | 3755                       | 4070             | 4640             | 5215             |     |     |
|       | 40 km/h                | 2145                    | 2535               | 2875                   | 3220                    | 3510                       | 3800             | 4340             | 4875             |     |     |
|       | 50 km/h                | 2050                    | 2425               | 2750                   | 3075                    | 3350                       | 3635             | 4150             | 4725             |     |     |
|       | 65 km/h                | 1950                    | 2310               | 2620                   | 2930                    | 3190                       | 3460             | 3950             | 4500             |     |     |
| 38"   | 6X11491                | 480/70R38 145A8/145B TL | 483                | 1683                   | 763                     | 5062                       | W15L             | 143              | 47               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 3735                    | 4400               | 5000                   | 5600                    | 6135                       | 6670             |                  |                  |     |     |
|       | 10 km/h                | 2435                    | 2870               | 3260                   | 3650                    | 4000                       | 4350             |                  |                  |     |     |
|       | 25 km/h                | 1800                    | 2125               | 2410                   | 2700                    | 2960                       | 3220             |                  |                  |     |     |
|       | 30 km/h                | 1740                    | 2050               | 2330                   | 2610                    | 2855                       | 3100             |                  |                  |     |     |
|       | 40 km/h                | 1620                    | 1910               | 2175                   | 2435                    | 2670                       | 2900             |                  |                  |     |     |
|       | 50 km/h                | 1620                    | 1910               | 2175                   | 2435                    | 2670                       | 2900             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 38"   | 6X11521                | 520/70R38 150A8/150B TL | 529                | 1743                   | 787                     | 5238                       | W16L             | 168              | 48               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 4315                    | 5085               | 5780                   | 6470                    | 7090                       | 7705             |                  |                  |     |     |
|       | 10 km/h                | 2810                    | 3320               | 3770                   | 4220                    | 4620                       | 5025             |                  |                  |     |     |
|       | 25 km/h                | 2080                    | 2450               | 2790                   | 3120                    | 3420                       | 3720             |                  |                  |     |     |
|       | 30 km/h                | 2010                    | 2365               | 2690                   | 3010                    | 3300                       | 3585             |                  |                  |     |     |
|       | 40 km/h                | 1875                    | 2210               | 2510                   | 2810                    | 3080                       | 3350             |                  |                  |     |     |
|       | 50 km/h                | 1875                    | 2210               | 2510                   | 2810                    | 3080                       | 3350             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 38"   | 6X13981                | 580/70R38 155D/158A8 TL | 580                | 1822                   | 811                     | 5465                       | W18L             | 203              | 51               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 5470                    | 6450               | 7330                   | 8210                    | 8990                       | 9775             |                  |                  |     |     |
|       | 10 km/h                | 3570                    | 4210               | 4780                   | 5355                    | 5865                       | 6375             |                  |                  |     |     |
|       | 25 km/h                | 2640                    | 3110               | 3540                   | 3960                    | 4340                       | 4720             |                  |                  |     |     |
|       | 30 km/h                | 2550                    | 3000               | 3410                   | 3820                    | 4180                       | 4550             |                  |                  |     |     |
|       | 40 km/h                | 2380                    | 2805               | 3190                   | 3570                    | 3910                       | 4250             |                  |                  |     |     |
|       | 50 km/h                | 2275                    | 2680               | 3045                   | 3415                    | 3740                       | 4070             |                  |                  |     |     |
|       | 65 km/h                | 2165                    | 2550               | 2900                   | 3250                    | 3560                       | 3875             |                  |                  |     |     |

| Rim Ø | Item number | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |       |       |     |
|-------|-------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-------|-------|-----|
| 38"   | 6X11541     | 580/70R38 170A8/170B TL | 580                | 1822                   | 811                     | 5465                       | W18L             | 224              | 51               |       |       |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |       |       |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8   | 3.2 |
|       |             | Static                  | 4990               | 5880                   | 6680                    | 7490                       | 8200             | 8910             | 11315            | 12560 | 13800 |     |
|       |             | 10 km/h                 | 3255               | 3835                   | 4360                    | 4880                       | 5350             | 5810             | 7380             | 8190  | 9000  |     |
|       |             | 25 km/h                 | 2410               | 2840                   | 3225                    | 3610                       | 3960             | 4300             | 5460             | 6060  | 6660  |     |
|       |             | 30 km/h                 | 2320               | 2740                   | 3110                    | 3480                       | 3815             | 4145             | 5260             | 5840  | 6420  |     |
|       |             | 40 km/h                 | 2170               | 2560                   | 2905                    | 3255                       | 3565             | 3875             | 4920             | 5460  | 6000  |     |
|       |             | 50 km/h                 | 2170               | 2560                   | 2905                    | 3255                       | 3565             | 3875             | 4920             | 5460  | 6000  |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |       |       |     |
| 38"   | 6X13951     | 710/70R38 166D/169A8 TL | 741                | 1950                   | 863                     | 5837                       | DW23B            | 291              | 58               |       |       |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |       |       |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8   | 3.2 |
|       |             | Static                  | 7470               | 8800                   | 10005                   | 11205                      | 12270            | 13340            |                  |       |       |     |
|       |             | 10 km/h                 | 4870               | 5740                   | 6525                    | 7310                       | 8000             | 8700             |                  |       |       |     |
|       |             | 25 km/h                 | 3605               | 4250                   | 4830                    | 5410                       | 5920             | 6440             |                  |       |       |     |
|       |             | 30 km/h                 | 3475               | 4095                   | 4655                    | 5210                       | 5710             | 6205             |                  |       |       |     |
|       |             | 40 km/h                 | 3250               | 3830                   | 4350                    | 4870                       | 5335             | 5800             |                  |       |       |     |
|       |             | 50 km/h                 | 3105               | 3655                   | 4160                    | 4650                       | 5100             | 5565             |                  |       |       |     |
|       |             | 65 km/h                 | 2955               | 3480                   | 3960                    | 4430                       | 4855             | 5300             |                  |       |       |     |
| 42"   | 6X11551     | 580/70R42 158A8/158B TL | 575                | 1870                   | 835                     | 5625                       | W18L             | 216              | 51               |       |       |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |       |       |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8   | 3.2 |
|       |             | Static                  | 5470               | 6450                   | 7330                    | 8210                       | 8990             | 9775             |                  |       |       |     |
|       |             | 10 km/h                 | 3570               | 4210                   | 4780                    | 5355                       | 5865             | 6375             |                  |       |       |     |
|       |             | 25 km/h                 | 2640               | 3110                   | 3540                    | 3960                       | 4340             | 4720             |                  |       |       |     |
|       |             | 30 km/h                 | 2550               | 3000                   | 3410                    | 3820                       | 4180             | 4550             |                  |       |       |     |
|       |             | 40 km/h                 | 2380               | 2805                   | 3190                    | 3570                       | 3910             | 4250             |                  |       |       |     |
|       |             | 50 km/h                 | 2380               | 2805                   | 3190                    | 3570                       | 3910             | 4250             |                  |       |       |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |       |       |     |
| 42"   | 6X11571     | 620/70R42 160A8/160B TL | 626                | 1917                   | 841                     | 5762                       | DW20B            | 238              | 52               |       |       |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |       |       |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8   | 3.2 |
|       |             | Static                  | 5795               | 6830                   | 7760                    | 8690                       | 9520             | 10350            |                  |       |       |     |
|       |             | 10 km/h                 | 3780               | 4455                   | 5060                    | 5670                       | 6210             | 6750             |                  |       |       |     |
|       |             | 25 km/h                 | 2800               | 3300                   | 3745                    | 4195                       | 4595             | 4995             |                  |       |       |     |
|       |             | 30 km/h                 | 2695               | 3180                   | 3610                    | 4045                       | 4430             | 4815             |                  |       |       |     |
|       |             | 40 km/h                 | 2520               | 2970                   | 3375                    | 3780                       | 4140             | 4500             |                  |       |       |     |
|       |             | 50 km/h                 | 2520               | 2970                   | 3375                    | 3780                       | 4140             | 4500             |                  |       |       |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |       |       |     |
| 42"   | 6X13971     | 710/70R42 173D/176A8 TL | 743                | 2079                   | 937                     | 6234                       | DW23B            | 329              | 58               |       |       |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |       |       |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8   | 3.2 |
|       |             | Static                  | 7920               | 9335                   | 10610                   | 11880                      | 13010            | 14145            | 13305            | 14950 |       |     |
|       |             | 10 km/h                 | 5165               | 6090                   | 6920                    | 7750                       | 8490             | 9225             | 8680             | 9750  |       |     |
|       |             | 25 km/h                 | 3820               | 4505                   | 5120                    | 5730                       | 6280             | 6830             | 6420             | 7215  |       |     |
|       |             | 30 km/h                 | 3685               | 4340                   | 4935                    | 5530                       | 6050             | 6580             | 6190             | 6955  |       |     |
|       |             | 40 km/h                 | 3440               | 4060                   | 4610                    | 5165                       | 5660             | 6150             | 5785             | 6500  |       |     |
|       |             | 50 km/h                 | 3285               | 3875                   | 4410                    | 4935                       | 5410             | 5880             | 5525             | 7455  |       |     |
|       |             | 65 km/h                 | 3130               | 3690                   | 4200                    | 4700                       | 5150             | 5600             | 5260             | 7100  |       |     |

## Farm Specialist TR-II 70 Series

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 42"   | 6X11591                | 710/75R42 175D/178A8 TL | 728                | 2127                   | 961                     | 6356                       | DW23B            | 370              | 62               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 7590                    | 8970               | 10180                  | 11385                   | 12420                      | 13455            | 15350            | 17250            |     |     |
|       | 10 km/h                | 4950                    | 5850               | 6640                   | 7425                    | 8100                       | 8775             | 10010            | 11250            |     |     |
|       | 25 km/h                | 3660                    | 4330               | 4910                   | 5495                    | 5990                       | 6490             | 7410             | 8325             |     |     |
|       | 30 km/h                | 3530                    | 4170               | 4735                   | 5300                    | 5780                       | 6260             | 7140             | 8025             |     |     |
|       | 40 km/h                | 3300                    | 3900               | 4425                   | 4950                    | 5400                       | 5850             | 6675             | 7500             |     |     |
|       | 50 km/h                | 3150                    | 3730               | 4230                   | 4730                    | 5155                       | 5585             | 6375             | 7245             |     |     |
|       | 65 km/h                | 3000                    | 3550               | 4030                   | 4505                    | 4910                       | 5320             | 6070             | 6900             |     |     |

## FARM SPECIALIST TR - II 80 SERIES

### Variuos Farming, Tractor Applications

Superior radial construction for optimum ground pressure distribution and low ground compaction. Good self-cleaning properties due to specially angled lugs. Excellent driving on and off-the-road. Superior tire life.



| Rim Ø   | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|---------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 38"     | 6X11131                | 380/80R38 142A8/142B TL | 377                | 1595                   | 738                     | 4803                       | W12              | 97               | 46               |     |     |
|         | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|         | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|         | Static                 | 2680                    | 3170               | 3595                   | 4020                    | 4390                       | 4750             | 5425             | 6095             |     |     |
|         | 10 km/h                | 1750                    | 2070               | 2345                   | 2620                    | 2860                       | 3100             | 3540             | 3975             |     |     |
|         | 25 km/h                | 1290                    | 1530               | 1735                   | 1940                    | 2120                       | 2290             | 2620             | 2940             |     |     |
|         | 30 km/h                | 1250                    | 1470               | 1670                   | 1870                    | 2040                       | 2210             | 2520             | 2835             |     |     |
|         | 40 km/h                | 1165                    | 1380               | 1560                   | 1750                    | 1910                       | 2070             | 2360             | 2650             |     |     |
|         | 50 km/h                | 1165                    | 1380               | 1560                   | 1750                    | 1910                       | 2070             | 2360             | 2650             |     |     |
| 65 km/h |                        |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 46"     | 6X11831                | 420/80R46 151A8/151B TL | 398                | 1848                   | 849                     | 5272                       | W13              | 142              | 40               |     |     |
|         | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|         | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|         | Static                 | 3490                    | 4125               | 4680                   | 5240                    | 5710                       | 6190             | 7060             | 7935             |     |     |
|         | 10 km/h                | 2280                    | 2690               | 3050                   | 3415                    | 3725                       | 4040             | 4605             | 5175             |     |     |
|         | 25 km/h                | 1685                    | 1990               | 2260                   | 2530                    | 2760                       | 2990             | 3410             | 3830             |     |     |
|         | 30 km/h                | 1620                    | 1920               | 2180                   | 2435                    | 2660                       | 2880             | 3285             | 3690             |     |     |
|         | 40 km/h                | 1520                    | 1790               | 2035                   | 2280                    | 2480                       | 2690             | 3070             | 3450             |     |     |
|         | 50 km/h                | 1520                    | 1790               | 2035                   | 2280                    | 2480                       | 2690             | 3070             | 3450             |     |     |
| 65 km/h |                        |                         |                    |                        |                         |                            |                  |                  |                  |     |     |

| Rim Ø   | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|---------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 46"     | 6X11321                | 480/80R46 158A8/158B TL | 490                | 1971                   | 905                     | 5936                       | DW16L            | 188              | 49               |     |     |
|         | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|         | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|         | Static                 | 4300                    | 5080               | 5770                   | 6450                    | 7040                       | 7625             | 8700             | 9775             |     |     |
|         | 10 km/h                | 2805                    | 3315               | 3760                   | 4210                    | 4590                       | 4970             | 5670             | 6375             |     |     |
|         | 25 km/h                | 2075                    | 2450               | 2780                   | 3110                    | 3400                       | 3680             | 4200             | 4720             |     |     |
|         | 30 km/h                | 2000                    | 2365               | 2680                   | 3000                    | 3270                       | 3550             | 4050             | 4550             |     |     |
|         | 40 km/h                | 1870                    | 2210               | 2510                   | 2805                    | 3060                       | 3315             | 3780             | 4250             |     |     |
|         | 50 km/h                | 1870                    | 2210               | 2510                   | 2805                    | 3060                       | 3315             | 3780             | 4250             |     |     |
| 65 km/h |                        |                         |                    |                        |                         |                            |                  |                  |                  |     |     |

## FARM SPECIALIST TR - II 85 SERIES

### Variuos Farming, Tractor Applications

Superior radial construction for optimum ground pressure distribution and low ground compaction. Good self-cleaning properties due to specially angled lugs. Excellent driving on and off-the-road. Superior tire life.



| Rim<br>Ø | Item number            | Description             | Section<br>Width<br>(mm) | Outsider<br>Diameter<br>(mm) | Static Load<br>Radius<br>(mm) | Rolling<br>Circum-<br>ference<br>(mm) | Recom.<br>Rim<br>Width | Tire Weight<br>(kg) | Tread Depth<br>(mm) |     |     |
|----------|------------------------|-------------------------|--------------------------|------------------------------|-------------------------------|---------------------------------------|------------------------|---------------------|---------------------|-----|-----|
| 20"      | 6X11061                | 280/85R20 112A8/112B TL | 282                      | 986                          | 446                           | 2943                                  | W10                    | 38                  | 42                  |     |     |
|          | Max Load (kg)          |                         |                          |                              |                               |                                       |                        |                     |                     |     |     |
|          | Speed \ Pressure (bar) | 0.6                     | 0.8                      | 1                            | 1.2                           | 1.4                                   | 1.6                    | 2                   | 2.4                 | 2.8 | 3.2 |
|          | Static                 | 1440                    | 1700                     | 1930                         | 2160                          | 2370                                  | 2575                   |                     |                     |     |     |
|          | 10 km/h                | 940                     | 1110                     | 1260                         | 1410                          | 1545                                  | 1680                   |                     |                     |     |     |
|          | 25 km/h                | 695                     | 820                      | 930                          | 1040                          | 1140                                  | 1240                   |                     |                     |     |     |
|          | 30 km/h                | 670                     | 790                      | 900                          | 1010                          | 1100                                  | 1200                   |                     |                     |     |     |
|          | 40 km/h                | 630                     | 740                      | 840                          | 940                           | 1030                                  | 1120                   |                     |                     |     |     |
|          | 50 km/h                | 630                     | 740                      | 840                          | 940                           | 1030                                  | 1120                   |                     |                     |     |     |
|          | 65 km/h                |                         |                          |                              |                               |                                       |                        |                     |                     |     |     |
| 24"      | 6X11071                | 280/85R24 115A8/115B TL | 285                      | 1080                         | 494                           | 3239                                  | W10                    | 44                  | 42                  |     |     |
|          | Max Load (kg)          |                         |                          |                              |                               |                                       |                        |                     |                     |     |     |
|          | Speed \ Pressure (bar) | 0.6                     | 0.8                      | 1                            | 1.2                           | 1.4                                   | 1.6                    | 2                   | 2.4                 | 2.8 | 3.2 |
|          | Static                 | 1565                    | 1840                     | 2095                         | 2350                          | 2570                                  | 2795                   |                     |                     |     |     |
|          | 10 km/h                | 1020                    | 1200                     | 1370                         | 1530                          | 1680                                  | 1820                   |                     |                     |     |     |
|          | 25 km/h                | 755                     | 890                      | 1010                         | 1130                          | 1240                                  | 1350                   |                     |                     |     |     |
|          | 30 km/h                | 730                     | 860                      | 975                          | 1090                          | 1195                                  | 1300                   |                     |                     |     |     |
|          | 40 km/h                | 680                     | 800                      | 910                          | 1020                          | 1120                                  | 1215                   |                     |                     |     |     |
|          | 50 km/h                | 680                     | 800                      | 910                          | 1020                          | 1120                                  | 1215                   |                     |                     |     |     |
|          | 65 km/h                |                         |                          |                              |                               |                                       |                        |                     |                     |     |     |

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 24"   | 6X11091                | 320/85R24 122A8/122B TL | 322                | 1139                   | 520                     | 3400                       | W11              | 54               | 43               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 1930                    | 2280               | 2590                   | 2900                    | 3170                       | 3450             |                  |                  |     |     |
|       | 10 km/h                | 1260                    | 1485               | 1690                   | 1890                    | 2070                       | 2250             |                  |                  |     |     |
|       | 25 km/h                | 930                     | 1100               | 1250                   | 1400                    | 1530                       | 1665             |                  |                  |     |     |
|       | 30 km/h                | 900                     | 1060               | 1200                   | 1350                    | 1480                       | 1605             |                  |                  |     |     |
|       | 40 km/h                | 840                     | 990                | 1125                   | 1260                    | 1380                       | 1500             |                  |                  |     |     |
|       | 50 km/h                | 840                     | 990                | 1125                   | 1260                    | 1380                       | 1500             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 24"   | 6X11111                | 340/85R24 125A8/125B TL | 353                | 1191                   | 547                     | 3558                       | W12              | 64               | 45               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2125                    | 2505               | 2845                   | 3190                    | 3490                       | 3795             |                  |                  |     |     |
|       | 10 km/h                | 1385                    | 1630               | 1855                   | 2080                    | 2280                       | 2475             |                  |                  |     |     |
|       | 25 km/h                | 1025                    | 1210               | 1370                   | 1540                    | 1685                       | 1830             |                  |                  |     |     |
|       | 30 km/h                | 990                     | 1165               | 1320                   | 1480                    | 1620                       | 1765             |                  |                  |     |     |
|       | 40 km/h                | 920                     | 1090               | 1240                   | 1385                    | 1520                       | 1650             |                  |                  |     |     |
|       | 50 km/h                | 920                     | 1090               | 1240                   | 1385                    | 1520                       | 1650             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 24"   | 6X11141                | 380/85R24 131A8/131B TL | 382                | 1273                   | 566                     | 3794                       | W12              | 76               | 47               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2510                    | 2960               | 3360                   | 3770                    | 4125                       | 4485             |                  |                  |     |     |
|       | 10 km/h                | 1640                    | 1930               | 2190                   | 2460                    | 2690                       | 2925             |                  |                  |     |     |
|       | 25 km/h                | 1210                    | 1430               | 1620                   | 1820                    | 1990                       | 2165             |                  |                  |     |     |
|       | 30 km/h                | 1170                    | 1380               | 1565                   | 1750                    | 1920                       | 2090             |                  |                  |     |     |
|       | 40 km/h                | 1090                    | 1290               | 1460                   | 1640                    | 1790                       | 1950             |                  |                  |     |     |
|       | 50 km/h                | 1090                    | 1290               | 1460                   | 1640                    | 1790                       | 1950             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 24"   | 6X11201                | 420/85R24 137A8/137B TL | 439                | 1322                   | 593                     | 3935                       | W15L             | 88               | 48               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2960                    | 3490               | 3970                   | 4440                    | 4870                       | 5290             |                  |                  |     |     |
|       | 10 km/h                | 1930                    | 2280               | 2590                   | 2900                    | 3170                       | 3450             |                  |                  |     |     |
|       | 25 km/h                | 1430                    | 1685               | 1915                   | 2145                    | 2350                       | 2550             |                  |                  |     |     |
|       | 30 km/h                | 1380                    | 1620               | 1845                   | 2070                    | 2260                       | 2460             |                  |                  |     |     |
|       | 40 km/h                | 1290                    | 1520               | 1725                   | 1930                    | 2115                       | 2300             |                  |                  |     |     |
|       | 50 km/h                | 1290                    | 1520               | 1725                   | 1930                    | 2115                       | 2300             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 28"   | 6X11081                | 280/85R28 118A8/118B TL | 283                | 1182                   | 540                     | 3555                       | W10              | 49               | 42               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 1700                    | 2000               | 2280                   | 2550                    | 2790                       | 3035             |                  |                  |     |     |
|       | 10 km/h                | 1110                    | 1310               | 1485                   | 1660                    | 1820                       | 1980             |                  |                  |     |     |
|       | 25 km/h                | 820                     | 970                | 1100                   | 1230                    | 1350                       | 1465             |                  |                  |     |     |
|       | 30 km/h                | 790                     | 930                | 1060                   | 1185                    | 1300                       | 1410             |                  |                  |     |     |
|       | 40 km/h                | 740                     | 870                | 990                    | 1110                    | 1210                       | 1320             |                  |                  |     |     |
|       | 50 km/h                | 740                     | 870                | 990                    | 1110                    | 1210                       | 1320             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 28"   | 6X11101                | 320/85R28 124A8/124B TL | 321                | 1258                   | 575                     | 3776                       | W11              | 59               | 43               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2060                    | 2430               | 2760                   | 3090                    | 3385                       | 3680             |                  |                  |     |     |
|       | 10 km/h                | 1340                    | 1580               | 1800                   | 2015                    | 2210                       | 2400             |                  |                  |     |     |
|       | 25 km/h                | 995                     | 1170               | 1330                   | 1490                    | 1630                       | 1775             |                  |                  |     |     |
|       | 30 km/h                | 960                     | 1130               | 1280                   | 1440                    | 1575                       | 1710             |                  |                  |     |     |
|       | 40 km/h                | 895                     | 1055               | 1200                   | 1340                    | 1470                       | 1600             |                  |                  |     |     |
|       | 50 km/h                | 895                     | 1055               | 1200                   | 1340                    | 1470                       | 1600             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 28"   | 6X11121                | 340/85R28 127A8/127B TL | 353                | 1308                   | 598                     | 3921                       | W12              | 71               | 45               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2250                    | 2660               | 3020                   | 3380                    | 3700                       | 4025             |                  |                  |     |     |
|       | 10 km/h                | 1470                    | 1730               | 1970                   | 2205                    | 2415                       | 2625             |                  |                  |     |     |
|       | 25 km/h                | 1090                    | 1280               | 1460                   | 1630                    | 1790                       | 1940             |                  |                  |     |     |
|       | 30 km/h                | 1050                    | 1235               | 1400                   | 1570                    | 1720                       | 1870             |                  |                  |     |     |
|       | 40 km/h                | 980                     | 1155               | 1310                   | 1470                    | 1610                       | 1750             |                  |                  |     |     |
|       | 50 km/h                | 980                     | 1155               | 1310                   | 1470                    | 1610                       | 1750             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 28"   | 6X11151                | 380/85R28 133A8/133B TL | 386                | 1378                   | 627                     | 4124                       | W13              | 82               | 47               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2650                    | 3130               | 3550                   | 3980                    | 4360                       | 4740             |                  |                  |     |     |
|       | 10 km/h                | 1730                    | 2040               | 2320                   | 2595                    | 2840                       | 3090             |                  |                  |     |     |
|       | 25 km/h                | 1280                    | 1510               | 1715                   | 1920                    | 2100                       | 2290             |                  |                  |     |     |
|       | 30 km/h                | 1230                    | 1455               | 1650                   | 1850                    | 2030                       | 2200             |                  |                  |     |     |
|       | 40 km/h                | 1150                    | 1360               | 1545                   | 1730                    | 1895                       | 2060             |                  |                  |     |     |
|       | 50 km/h                | 1150                    | 1360               | 1545                   | 1730                    | 1895                       | 2060             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 28"   | 6X11211                | 420/85R28 139A8/139B TL | 439                | 1438                   | 637                     | 4298                       | W15L             | 102              | 48               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 3130                    | 3690               | 4190                   | 4695                    | 5140                       | 5590             |                  |                  |     |     |
|       | 10 km/h                | 2040                    | 2405               | 2730                   | 3060                    | 3350                       | 3645             |                  |                  |     |     |
|       | 25 km/h                | 1510                    | 1780               | 2020                   | 2265                    | 2480                       | 2700             |                  |                  |     |     |
|       | 30 km/h                | 1455                    | 1715               | 1950                   | 2180                    | 2390                       | 2600             |                  |                  |     |     |
|       | 40 km/h                | 1360                    | 1600               | 1820                   | 2040                    | 2235                       | 2430             |                  |                  |     |     |
|       | 50 km/h                | 1360                    | 1600               | 1820                   | 2040                    | 2235                       | 2430             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 30"   | 6X11161                | 380/85R30 135A8/135B TL | 388                | 1407                   | 639                     | 4218                       | W13              | 88               | 46               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 2810                    | 3310               | 3760                   | 4210                    | 4610                       | 5010             |                  |                  |     |     |
|       | 10 km/h                | 1830                    | 2160               | 2450                   | 2750                    | 3010                       | 3270             |                  |                  |     |     |
|       | 25 km/h                | 1355                    | 1600               | 1815                   | 2030                    | 2225                       | 2420             |                  |                  |     |     |
|       | 30 km/h                | 1305                    | 1540               | 1750                   | 1960                    | 2145                       | 2330             |                  |                  |     |     |
|       | 40 km/h                | 1220                    | 1440               | 1635                   | 1830                    | 2005                       | 2180             |                  |                  |     |     |
|       | 50 km/h                | 1220                    | 1440               | 1635                   | 1830                    | 2005                       | 2180             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |

| Rim Ø | Item number | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |     |
|-------|-------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|-----|
| 30"   | 6X11221     | 420/85R30 140A8/140B TL | 439                | 1483                   | 674                     | 4440                       | W15L             | 107              | 48               |     |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 |
|       |             | Static                  | 3220               | 3795                   | 4310                    | 4830                       | 5290             | 5750             |                  |     |     |     |
|       |             | 10 km/h                 | 2100               | 2475                   | 2810                    | 3150                       | 3450             | 3750             |                  |     |     |     |
|       |             | 25 km/h                 | 1550               | 1830                   | 2080                    | 2330                       | 2550             | 2775             |                  |     |     |     |
|       |             | 30 km/h                 | 1500               | 1765                   | 2005                    | 2250                       | 2460             | 2675             |                  |     |     |     |
|       |             | 40 km/h                 | 1400               | 1650                   | 1875                    | 2100                       | 2300             | 2500             |                  |     |     |     |
|       |             | 50 km/h                 | 1400               | 1650                   | 1875                    | 2100                       | 2300             | 2500             |                  |     |     |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |
| 30"   | 6X11271     | 460/85R30 145A8/145B TL | 466                | 1527                   | 680                     | 4566                       | W16L             | 125              | 50               |     |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 |
|       |             | Static                  | 3735               | 4400                   | 5000                    | 5600                       | 6135             | 6670             |                  |     |     |     |
|       |             | 10 km/h                 | 2435               | 2870                   | 3260                    | 3650                       | 4000             | 4350             |                  |     |     |     |
|       |             | 25 km/h                 | 1800               | 2125                   | 2410                    | 2700                       | 2960             | 3220             |                  |     |     |     |
|       |             | 30 km/h                 | 1740               | 2050                   | 2330                    | 2610                       | 2855             | 3100             |                  |     |     |     |
|       |             | 40 km/h                 | 1620               | 1910                   | 2175                    | 2435                       | 2670             | 2900             |                  |     |     |     |
|       |             | 50 km/h                 | 1620               | 1910                   | 2175                    | 2435                       | 2670             | 2900             |                  |     |     |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |
| 32"   | 6X11971     | 320/85R32 126A8/126B TL | 311                | 1354                   | 623                     | 4063                       | W10              | 65               | 36               |     |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 |
|       |             | Static                  |                    |                        |                         |                            |                  | 3910             |                  |     |     |     |
|       |             | 10 km/h                 |                    |                        |                         |                            |                  | 2550             |                  |     |     |     |
|       |             | 25 km/h                 |                    |                        |                         |                            |                  | 1870             |                  |     |     |     |
|       |             | 30 km/h                 |                    |                        |                         |                            |                  | 1820             |                  |     |     |     |
|       |             | 40 km/h                 |                    |                        |                         |                            |                  | 1700             |                  |     |     |     |
|       |             | 50 km/h                 |                    |                        |                         |                            |                  | 1700             |                  |     |     |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |
| 34"   | 6X11171     | 380/85R34 137A8/137B TL | 389                | 1487                   | 681                     | 4470                       | W12              | 101              | 46               |     |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 |
|       |             | Static                  | 2960               | 3490                   | 3970                    | 4440                       | 4870             | 5290             |                  |     |     |     |
|       |             | 10 km/h                 | 1930               | 2280                   | 2590                    | 2900                       | 3170             | 3450             |                  |     |     |     |
|       |             | 25 km/h                 | 1430               | 1685                   | 1915                    | 2145                       | 2350             | 2550             |                  |     |     |     |
|       |             | 30 km/h                 | 1380               | 1620                   | 1845                    | 2070                       | 2260             | 2460             |                  |     |     |     |
|       |             | 40 km/h                 | 1290               | 1520                   | 1725                    | 1930                       | 2115             | 2300             |                  |     |     |     |
|       |             | 50 km/h                 | 1290               | 1520                   | 1725                    | 1930                       | 2115             | 2300             |                  |     |     |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |
| 34"   | 6X11231     | 420/85R34 142A8/142B TL | 439                | 1594                   | 710                     | 4784                       | W15L             | 120              | 48               |     |     |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 |
|       |             | Static                  | 3410               | 4020                   | 4570                    | 5120                       | 5610             | 6095             |                  |     |     |     |
|       |             | 10 km/h                 | 2225               | 2620                   | 2980                    | 3340                       | 3660             | 3975             |                  |     |     |     |
|       |             | 25 km/h                 | 1650               | 1940                   | 2205                    | 2470                       | 2705             | 2940             |                  |     |     |     |
|       |             | 30 km/h                 | 1590               | 1870                   | 2130                    | 2380                       | 2610             | 2835             |                  |     |     |     |
|       |             | 40 km/h                 | 1480               | 1750                   | 1990                    | 2225                       | 2440             | 2650             |                  |     |     |     |
|       |             | 50 km/h                 | 1480               | 1750                   | 1990                    | 2225                       | 2440             | 2650             |                  |     |     |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |

| Rim Ø | Item number | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |      |      |      |
|-------|-------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|------|------|------|
| 34"   | 6X11281     | 460/85R34 147A8/147B TL | 470                | 1649                   | 743                     | 4944                       | W16L             | 143              | 50               |      |      |      |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |      |      |      |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4  | 2.8  | 3.2  |
|       |             | Static                  | 3960               | 4670                   | 5300                    | 5940                       | 6510             | 7070             |                  |      |      |      |
|       |             | 10 km/h                 | 2580               | 3040                   | 3460                    | 3875                       | 4240             | 4610             |                  |      |      |      |
|       |             | 25 km/h                 | 1910               | 2250                   | 2560                    | 2870                       | 3140             | 3410             |                  |      |      |      |
|       |             | 30 km/h                 | 1840               | 2170                   | 2470                    | 2760                       | 3030             | 3290             |                  |      |      |      |
|       |             | 40 km/h                 | 1720               | 2030                   | 2305                    | 2580                       | 2830             | 3075             |                  |      |      |      |
|       |             | 50 km/h                 | 1720               | 2030                   | 2305                    | 2580                       | 2830             | 3075             |                  |      |      |      |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |      |      |      |
| 34"   | 6X11291     | 460/85R34 157A8/157B TL | 470                | 1649                   | 743                     | 4944                       | W16L             | 159              | 50               |      |      |      |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |      |      |      |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4  | 2.8  | 3.2  |
|       |             | Static                  | 3960               | 4670                   | 5300                    | 5940                       | 6510             | 7070             | 7115             | 7970 | 8440 | 9490 |
|       |             | 10 km/h                 | 2580               | 3040                   | 3460                    | 3875                       | 4240             | 4610             | 4640             | 5200 | 5510 | 6190 |
|       |             | 25 km/h                 | 1910               | 2250                   | 2560                    | 2870                       | 3140             | 3410             | 3430             | 3845 | 4075 | 4580 |
|       |             | 30 km/h                 | 1840               | 2170                   | 2470                    | 2760                       | 3030             | 3290             | 3310             | 3710 | 3930 | 4410 |
|       |             | 40 km/h                 | 1720               | 2030                   | 2305                    | 2580                       | 2830             | 3075             | 3090             | 3465 | 3670 | 4125 |
|       |             | 50 km/h                 | 1720               | 2030                   | 2305                    | 2580                       | 2830             | 3075             | 3090             | 3465 | 3670 | 4125 |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |      |      |      |
| 36"   | 6X11981     | 320/85R36 128A8/128B TL | 313                | 1448                   | 667                     | 4368                       | W10              | 72               | 36               |      |      |      |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |      |      |      |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4  | 2.8  | 3.2  |
|       |             | Static                  |                    |                        |                         |                            |                  | 4140             |                  |      |      |      |
|       |             | 10 km/h                 |                    |                        |                         |                            |                  | 2700             |                  |      |      |      |
|       |             | 25 km/h                 |                    |                        |                         |                            |                  | 1980             |                  |      |      |      |
|       |             | 30 km/h                 |                    |                        |                         |                            |                  | 1925             |                  |      |      |      |
|       |             | 40 km/h                 |                    |                        |                         |                            |                  | 1800             |                  |      |      |      |
|       |             | 50 km/h                 |                    |                        |                         |                            |                  | 1800             |                  |      |      |      |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |      |      |      |
| 36"   | 6X11991     | 340/85R36 132A8/132B TL | 357                | 1489                   | 680                     | 4489                       | W11              | 79               | 37               |      |      |      |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |      |      |      |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4  | 2.8  | 3.2  |
|       |             | Static                  |                    |                        |                         |                            |                  | 4600             |                  |      |      |      |
|       |             | 10 km/h                 |                    |                        |                         |                            |                  | 3000             |                  |      |      |      |
|       |             | 25 km/h                 |                    |                        |                         |                            |                  | 2200             |                  |      |      |      |
|       |             | 30 km/h                 |                    |                        |                         |                            |                  | 2140             |                  |      |      |      |
|       |             | 40 km/h                 |                    |                        |                         |                            |                  | 2000             |                  |      |      |      |
|       |             | 50 km/h                 |                    |                        |                         |                            |                  | 2000             |                  |      |      |      |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |      |      |      |
| 38"   | 6X12001     | 340/85R38 133A8/133B TL | 353                | 1540                   | 711                     | 4645                       | W11              | 81               | 37               |      |      |      |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |      |      |      |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4  | 2.8  | 3.2  |
|       |             | Static                  |                    |                        |                         |                            |                  | 4740             |                  |      |      |      |
|       |             | 10 km/h                 |                    |                        |                         |                            |                  | 3090             |                  |      |      |      |
|       |             | 25 km/h                 |                    |                        |                         |                            |                  | 2265             |                  |      |      |      |
|       |             | 30 km/h                 |                    |                        |                         |                            |                  | 2200             |                  |      |      |      |
|       |             | 40 km/h                 |                    |                        |                         |                            |                  | 2060             |                  |      |      |      |
|       |             | 50 km/h                 |                    |                        |                         |                            |                  | 2060             |                  |      |      |      |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |      |      |      |

# Farm Specialist TR-II 85 Series

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 38"   | 6X11241                | 420/85R38 144A8/144B TL | 439                | 1667                   | 752                     | 5014                       | W15L             | 127              | 48               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 3605                    | 4250               | 4830                   | 5410                    | 5925                       | 6440             |                  |                  |     |     |
|       | 10 km/h                | 2350                    | 2770               | 3150                   | 3530                    | 3860                       | 4200             |                  |                  |     |     |
|       | 25 km/h                | 1740                    | 2050               | 2330                   | 2610                    | 2860                       | 3110             |                  |                  |     |     |
|       | 30 km/h                | 1680                    | 1980               | 2250                   | 2520                    | 2755                       | 2995             |                  |                  |     |     |
|       | 40 km/h                | 1570                    | 1850               | 2100                   | 2350                    | 2575                       | 2800             |                  |                  |     |     |
|       | 50 km/h                | 1570                    | 1850               | 2100                   | 2350                    | 2575                       | 2800             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 38"   | 6X11301                | 460/85R38 149A8/149B TL | 470                | 1737                   | 776                     | 5207                       | W16L             | 150              | 50               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 4185                    | 4930               | 5605                   | 6280                    | 6880                       | 7475             |                  |                  |     |     |
|       | 10 km/h                | 2730                    | 3220               | 3655                   | 4095                    | 4485                       | 4875             |                  |                  |     |     |
|       | 25 km/h                | 2020                    | 2380               | 2705                   | 3030                    | 3320                       | 3610             |                  |                  |     |     |
|       | 30 km/h                | 1950                    | 2295               | 2610                   | 2920                    | 3200                       | 3480             |                  |                  |     |     |
|       | 40 km/h                | 1820                    | 2145               | 2440                   | 2730                    | 2990                       | 3250             |                  |                  |     |     |
|       | 50 km/h                | 1820                    | 2145               | 2440                   | 2730                    | 2990                       | 3250             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 38"   | 6X11331                | 520/85R38 155A8/155B TL | 530                | 1863                   | 841                     | 5589                       | W18L             | 190              | 51               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 4990                    | 5880               | 6680                   | 7490                    | 8200                       | 8910             |                  |                  |     |     |
|       | 10 km/h                | 3255                    | 3835               | 4360                   | 4880                    | 5350                       | 5810             |                  |                  |     |     |
|       | 25 km/h                | 2410                    | 2840               | 3225                   | 3610                    | 3960                       | 4300             |                  |                  |     |     |
|       | 30 km/h                | 2320                    | 2740               | 3110                   | 3480                    | 3815                       | 4145             |                  |                  |     |     |
|       | 40 km/h                | 2170                    | 2560               | 2905                   | 3255                    | 3565                       | 3875             |                  |                  |     |     |
|       | 50 km/h                | 2170                    | 2560               | 2905                   | 3255                    | 3565                       | 3875             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 38"   | 6X11371                | 650/85R38 173D/176A8 TL | 666                | 2072                   | 935                     | 6192                       | DW20B            | 340              | 60               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 7185                    | 8490               | 9635                   | 10780                   | 11760                      | 12740            | 14530            | 16330            |     |     |
|       | 10 km/h                | 4685                    | 5540               | 6280                   | 7030                    | 7670                       | 8310             | 9480             | 10650            |     |     |
|       | 25 km/h                | 3470                    | 4100               | 4650                   | 5200                    | 5670                       | 6150             | 7010             | 7880             |     |     |
|       | 30 km/h                | 3340                    | 3950               | 4480                   | 5010                    | 5470                       | 5925             | 6760             | 7600             |     |     |
|       | 40 km/h                | 3120                    | 3690               | 4190                   | 4685                    | 5110                       | 5540             | 6320             | 7100             |     |     |
|       | 50 km/h                | 2980                    | 3530               | 4000                   | 4475                    | 4885                       | 5290             | 6040             | 6825             |     |     |
|       | 65 km/h                | 2840                    | 3360               | 3810                   | 4260                    | 4650                       | 5040             | 5750             | 6500             |     |     |
| 42"   | 6X11311                | 460/85R42 151A8/151B TL | 473                | 1865                   | 844                     | 5611                       | W16L             | 172              | 50               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 4440                    | 5240               | 5950                   | 6665                    | 7300                       | 7935             |                  |                  |     |     |
|       | 10 km/h                | 2900                    | 3415               | 3880                   | 4350                    | 4760                       | 5175             |                  |                  |     |     |
|       | 25 km/h                | 2145                    | 2530               | 2870                   | 3220                    | 3520                       | 3830             |                  |                  |     |     |
|       | 30 km/h                | 2070                    | 2435               | 2770                   | 3100                    | 3395                       | 3690             |                  |                  |     |     |
|       | 40 km/h                | 1930                    | 2280               | 2590                   | 2900                    | 3170                       | 3450             |                  |                  |     |     |
|       | 50 km/h                | 1930                    | 2280               | 2590                   | 2900                    | 3170                       | 3450             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |

| Rim Ø                  | Item number | Description             | Section Width (mm) | Outsider Diameter (mm)  | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |       |     |     |
|------------------------|-------------|-------------------------|--------------------|-------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-------|-----|-----|
| 42"                    | 6X11341     | 520/85R42 157A8/157B TL | 530                | 1958                    | 875                     | 5884                       | W18L             | 201              | 51               |       |     |     |
|                        |             | Max Load (kg)           |                    |                         |                         |                            |                  |                  |                  |       |     |     |
|                        |             | Speed \ Pressure (bar)  | 0.6                | 0.8                     | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8 | 3.2 |
|                        |             | Static                  | 5310               | 6260                    | 7115                    | 7970                       | 8730             | 9490             |                  |       |     |     |
|                        |             | 10 km/h                 | 3465               | 4080                    | 4640                    | 5200                       | 5690             | 6190             |                  |       |     |     |
|                        |             | 25 km/h                 | 2560               | 3020                    | 3430                    | 3845                       | 4210             | 4580             |                  |       |     |     |
|                        |             | 30 km/h                 | 2470               | 2910                    | 3310                    | 3710                       | 4060             | 4410             |                  |       |     |     |
|                        |             | 40 km/h                 | 2310               | 2720                    | 3090                    | 3465                       | 3795             | 4125             |                  |       |     |     |
|                        |             | 50 km/h                 | 2310               | 2720                    | 3090                    | 3465                       | 3795             | 4125             |                  |       |     |     |
|                        |             | 65 km/h                 |                    |                         |                         |                            |                  |                  |                  |       |     |     |
|                        |             | 42"                     | 6X11351            | 520/85R42 162A8/162B TL | 530                     | 1958                       | 875              | 5884             | W18L             | 213   | 51  |     |
|                        |             |                         |                    | Max Load (kg)           |                         |                            |                  |                  |                  |       |     |     |
| Speed \ Pressure (bar) | 0.6         |                         |                    | 0.8                     | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8 | 3.2 |
| Static                 | 5310        |                         |                    | 6260                    | 7115                    | 7970                       | 8730             | 9490             | 9720             | 10925 |     |     |
| 10 km/h                | 3465        |                         |                    | 4080                    | 4640                    | 5200                       | 5690             | 6190             | 6340             | 7125  |     |     |
| 25 km/h                | 2560        |                         |                    | 3020                    | 3430                    | 3845                       | 4210             | 4580             | 4690             | 5270  |     |     |
| 30 km/h                | 2470        |                         |                    | 2910                    | 3310                    | 3710                       | 4060             | 4410             | 4520             | 5080  |     |     |
| 40 km/h                | 2310        |                         |                    | 2720                    | 3090                    | 3465                       | 3795             | 4125             | 4230             | 4750  |     |     |
| 50 km/h                | 2310        |                         |                    | 2720                    | 3090                    | 3465                       | 3795             | 4125             | 4230             | 4750  |     |     |
| 65 km/h                |             |                         |                    |                         |                         |                            |                  |                  |                  |       |     |     |
| 42"                    | 6X11361     |                         |                    | 520/85R46 158A8/158B TL | 535                     | 2062                       | 921              | 6205             | W18L             | 220   | 51  |     |
|                        |             |                         |                    | Max Load (kg)           |                         |                            |                  |                  |                  |       |     |     |
|                        |             | Speed \ Pressure (bar)  | 0.6                | 0.8                     | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8 | 3.2 |
|                        |             | Static                  | 5470               | 6450                    | 7330                    | 8210                       | 8990             | 9775             |                  |       |     |     |
|                        |             | 10 km/h                 | 3570               | 4210                    | 4780                    | 5355                       | 5865             | 6375             |                  |       |     |     |
|                        |             | 25 km/h                 | 2640               | 3110                    | 3540                    | 3960                       | 4340             | 4720             |                  |       |     |     |
|                        |             | 30 km/h                 | 2550               | 3000                    | 3410                    | 3820                       | 4180             | 4550             |                  |       |     |     |
|                        |             | 40 km/h                 | 2380               | 2805                    | 3190                    | 3570                       | 3910             | 4250             |                  |       |     |     |
|                        |             | 50 km/h                 | 2380               | 2805                    | 3190                    | 3570                       | 3910             | 4250             |                  |       |     |     |
|                        |             | 65 km/h                 |                    |                         |                         |                            |                  |                  |                  |       |     |     |

## FARM SPECIALIST TR - II RC (ROW CROP)

### Versatile Tractor And Sprayer Tire For Row Crop Application

Superior radial construction row crop tire for every kind of cultivation, harvesting and spraying operation. Minimum damage to crops even in narrow spaced plantations. Excellent self-cleaning and improved traction. Overlapping crown and unique lug design with deep tread depth for long tread life and durability.



| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|
| 16"   | 6X11881                | 210/95R16 106A8/106B TL | 215                | 795                    | 368                     | 2373                       | W7               | 23               | 32               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 |                         |                    |                        |                         |                            | 1700             | 1945             | 2185             |     |     |
|       | 10 km/h                |                         |                    |                        |                         |                            | 1110             | 1270             | 1425             |     |     |
|       | 25 km/h                |                         |                    |                        |                         |                            | 815              | 930              | 1045             |     |     |
|       | 30 km/h                |                         |                    |                        |                         |                            | 790              | 905              | 1020             |     |     |
|       | 40 km/h                |                         |                    |                        |                         |                            | 740              | 845              | 950              |     |     |
|       | 50 km/h                |                         |                    |                        |                         |                            | 740              | 845              | 950              |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 18"   | 6X11891                | 210/95R18 108A8/108B TL | 215                | 849                    | 393                     | 2542                       | W7               | 25,5             | 32               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 |                         |                    |                        |                         |                            | 1790             | 2050             | 2300             |     |     |
|       | 10 km/h                |                         |                    |                        |                         |                            | 1170             | 1335             | 1500             |     |     |
|       | 25 km/h                |                         |                    |                        |                         |                            | 860              | 980              | 1100             |     |     |
|       | 30 km/h                |                         |                    |                        |                         |                            | 835              | 950              | 1070             |     |     |
|       | 40 km/h                |                         |                    |                        |                         |                            | 780              | 890              | 1000             |     |     |
|       | 50 km/h                |                         |                    |                        |                         |                            | 780              | 890              | 1000             |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 20"   | 6X11901                | 210/95R20 110A8/110B TL | 215                | 895                    | 413                     | 2686                       | W7               | 27,5             | 32               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 |                         |                    |                        |                         |                            | 1900             | 2170             | 2440             |     |     |
|       | 10 km/h                |                         |                    |                        |                         |                            | 1240             | 1415             | 1590             |     |     |
|       | 25 km/h                |                         |                    |                        |                         |                            | 910              | 1040             | 1165             |     |     |
|       | 30 km/h                |                         |                    |                        |                         |                            | 885              | 1010             | 1130             |     |     |
|       | 40 km/h                |                         |                    |                        |                         |                            | 830              | 940              | 1060             |     |     |
|       | 50 km/h                |                         |                    |                        |                         |                            | 830              | 940              | 1060             |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
| 30"   | 6X11251                | 420/90R30 142A8/142B TL | 434                | 1496                   | 679                     | 4478                       | DW13             | 109              | 48               |     |     |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |     |     |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8 | 3.2 |
|       | Static                 | 3410                    | 4020               | 4570                   | 5120                    | 5610                       | 6095             |                  |                  |     |     |
|       | 10 km/h                | 2225                    | 2620               | 2980                   | 3340                    | 3660                       | 3975             |                  |                  |     |     |
|       | 25 km/h                | 1650                    | 1940               | 2205                   | 2470                    | 2705                       | 2940             |                  |                  |     |     |
|       | 30 km/h                | 1590                    | 1870               | 2130                   | 2380                    | 2610                       | 2835             |                  |                  |     |     |
|       | 40 km/h                | 1480                    | 1750               | 1990                   | 2225                    | 2440                       | 2650             |                  |                  |     |     |
|       | 50 km/h                | 1480                    | 1750               | 1990                   | 2225                    | 2440                       | 2650             |                  |                  |     |     |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |     |     |

| Rim Ø | Item number | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |
|-------|-------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|
| 30"   | 6X11261     | 420/90R30 147A8/147B TL | 434                | 1496                   | 679                     | 4478                       | DW13             | 115              | 48               |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
| 32"   | 6X12011     | 230/95R32 128D/131A8 TL | 236                | 1240                   | 585                     | 3742                       | W7               | 45               | 33               |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
| 32"   | 6X12071     | 270/95R32 134D/137A8 TL | 284                | 1319                   | 620                     | 3975                       | W9               | 60               | 35               |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
| 32"   | 6X12081     | 270/95R32 136D/139A8 TL | 284                | 1319                   | 620                     | 3975                       | W9               | 60               | 35               |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
| 36"   | 6X12021     | 230/95R36 128D/131A8 TL | 229                | 1345                   | 636                     | 4078                       | W7               | 50               | 33               |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  |

| Rim Ø | Item number | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |     |     |     |     |   |     |
|-------|-------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-----|-----|-----|-----|---|-----|
| 36"   | 6X12091     | 270/95R36 137D/140A8 TL | 283                | 1422                   | 663                     | 4291                       | W9               | 66               | 35               |     |     |     |     |   |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 | 3.6 | 4 | 4.4 |
|       |             | Static                  |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 10 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 25 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 30 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 40 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 50 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
| 38"   | 6X12101     | 270/95R38 138D/141D TL  | 285                | 1474                   | 691                     | 4450                       | W9               | 68               | 35               |     |     |     |     |   |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 | 3.6 | 4 | 4.4 |
|       |             | Static                  |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 10 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 25 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 30 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 40 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 50 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
| 38"   | 6X12111     | 270/95R38 140D/143A8 TL | 285                | 1474                   | 691                     | 4450                       | W9               | 69               | 35               |     |     |     |     |   |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 | 3.6 | 4 | 4.4 |
|       |             | Static                  |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 10 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 25 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 30 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 40 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 50 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
| 40"   | 6X12031     | 230/95R40 135D/138A8 TL | 228                | 1454                   | 662                     | 4395                       | W7               | 55               | 33               |     |     |     |     |   |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 | 3.6 | 4 | 4.4 |
|       |             | Static                  |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 10 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 25 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 30 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 40 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 50 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
| 42"   | 6X12041     | 230/95R42 133D/136A8 TL | 228                | 1497                   | 684                     | 4527                       | W7               | 57               | 33               |     |     |     |     |   |     |
|       |             | Max Load (kg)           |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | Speed \ Pressure (bar)  | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4 | 2.8 | 3.2 | 3.6 | 4 | 4.4 |
|       |             | Static                  |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 10 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 25 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 30 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 40 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 50 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |
|       |             | 65 km/h                 |                    |                        |                         |                            |                  |                  |                  |     |     |     |     |   |     |

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |      |      |      |      |      |  |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|------|------|------|------|------|--|
| 42"   | 6X12121                | 270/95R42 140D/143A8 TL | 283                | 1580                   | 744                     | 4774                       | W9               | 74               | 35               |      |      |      |      |      |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2  | 3.6  | 4    | 4.4  |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 3565             | 4025             | 4485 | 4945 | 5350 | 5750 |      |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 2325             | 2625             | 2925 | 3225 | 3490 | 3750 |      |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 1840             | 2070             | 2310 | 2550 | 2755 | 2960 |      |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 1780             | 2010             | 2240 | 2470 | 2670 | 2875 |      |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 1700             | 1915             | 2135 | 2350 | 2545 | 2740 |      |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 1630             | 1840             | 2050 | 2260 | 2440 | 2625 |      |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  | 1550             | 1750             | 1950 | 2150 | 2325 | 2500 |      |  |
| 42"   | 6X12211                | 320/80R42 141D/144A8 TL | 315                | 1567                   | 730                     | 4771                       | W10              | 86               | 35               |      |      |      |      |      |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2  | 3.6  | 4    | 4.4  |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 3910             | 4440             | 4975 | 5450 | 5920 |      |      |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 2550             | 2900             | 3245 | 3550 | 3860 |      |      |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 2010             | 2290             | 2560 | 2810 | 3050 |      |      |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 1950             | 2220             | 2490 | 2720 | 2960 |      |      |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 1860             | 2115             | 2370 | 2590 | 2820 |      |      |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 1780             | 2030             | 2270 | 2490 | 2700 |      |      |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  | 1700             | 1930             | 2160 | 2370 | 2575 |      |      |  |
| 44"   | 6X12051                | 230/95R44 134D/137A8 TL | 229                | 1547                   | 735                     | 4679                       | W7               | 60               | 33               |      |      |      |      |      |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2  | 3.6  | 4    | 4.4  |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 2850             | 3220             | 3590 | 3955 | 4280 | 4600 | 4875 |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 1860             | 2100             | 2340 | 2580 | 2790 | 3000 | 3180 |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 1470             | 1660             | 1850 | 2040 | 2200 | 2370 | 2510 |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 1425             | 1610             | 1790 | 1980 | 2140 | 2300 | 2440 |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 1360             | 1530             | 1710 | 1880 | 2040 | 2190 | 2320 |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 1300             | 1470             | 1640 | 1805 | 1950 | 2100 | 2225 |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  | 1240             | 1400             | 1560 | 1720 | 1860 | 2000 | 2120 |  |
| 44"   | 6X12131                | 270/95R44 142D/145A8 TL | 279                | 1627                   | 768                     | 4917                       | W9               | 77               | 35               |      |      |      |      |      |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2  | 3.6  | 4    | 4.4  |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 3670             | 4145             | 4620 | 5090 | 5510 | 5920 | 6095 |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 2395             | 2700             | 3010 | 3320 | 3590 | 3860 | 3975 |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 1890             | 2135             | 2380 | 2620 | 2840 | 3050 | 3140 |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 1835             | 2070             | 2310 | 2550 | 2750 | 2960 | 3050 |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 1750             | 1970             | 2200 | 2425 | 2620 | 2820 | 2900 |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 1675             | 1890             | 2110 | 2325 | 2510 | 2700 | 2780 |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  | 1600             | 1800             | 2010 | 2215 | 2395 | 2575 | 2650 |  |
| 46"   | 6X12141                | 270/95R46 143D/146A8 TL | 282                | 1677                   | 798                     | 5066                       | W9               | 81               | 35               |      |      |      |      |      |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2  | 3.6  | 4    | 4.4  |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 3670             | 4145             | 4620 | 5090 | 5510 | 5920 | 6270 |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 2395             | 2700             | 3010 | 3320 | 3590 | 3860 | 4090 |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 1890             | 2135             | 2380 | 2620 | 2840 | 3050 | 3230 |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 1835             | 2070             | 2310 | 2550 | 2750 | 2960 | 3130 |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 1750             | 1970             | 2200 | 2425 | 2620 | 2820 | 2980 |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 1675             | 1890             | 2110 | 2325 | 2510 | 2700 | 2860 |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  | 1600             | 1800             | 2010 | 2215 | 2395 | 2575 | 2725 |  |

| Rim Ø | Item number            | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |      |      |      |      |      |  |
|-------|------------------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|------|------|------|------|------|--|
| 46"   | 6X12171                | 300/95R46 146D/149A8 TL | 305                | 1732                   | 815                     | 5233                       | W9               | 87               | 37               |      |      |      |      |      |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2  | 3.6  | 4    | 4.4  |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 4280             | 4830             | 5380 | 5930 | 6420 | 6900 |      |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 2790             | 3150             | 3510 | 3870 | 4185 | 4500 |      |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 2200             | 2490             | 2770 | 3060 | 3305 | 3555 |      |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 2140             | 2415             | 2690 | 2970 | 3210 | 3450 |      |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 2040             | 2300             | 2560 | 2825 | 3055 | 3285 |      |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 1950             | 2205             | 2460 | 2710 | 2930 | 3150 |      |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  | 1860             | 2100             | 2340 | 2580 | 2790 | 3000 |      |  |
| 46"   | 6X12181                | 300/95R46 148D/151A8 TL | 305                | 1732                   | 815                     | 5233                       | W9               | 88               | 37               |      |      |      |      |      |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2  | 3.6  | 4    | 4.4  |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 4280             | 4830             | 5380 | 5930 | 6420 | 6900 | 7245 |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 2790             | 3150             | 3510 | 3870 | 4185 | 4500 | 4725 |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 2200             | 2490             | 2770 | 3060 | 3305 | 3555 | 3730 |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 2140             | 2415             | 2690 | 2970 | 3210 | 3450 | 3620 |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 2040             | 2300             | 2560 | 2825 | 3055 | 3285 | 3450 |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 1950             | 2205             | 2460 | 2710 | 2930 | 3150 | 3310 |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  | 1860             | 2100             | 2340 | 2580 | 2790 | 3000 | 3150 |  |
| 46"   | 6X12221                | 320/90R46 148D/151A8 TL | 315                | 1737                   | 810                     | 5248                       | W10              | 89               | 37               |      |      |      |      |      |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2  | 3.6  | 4    | 4.4  |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 4280             | 4830             | 5380 | 5930 | 6900 | 7245 |      |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 2790             | 3150             | 3510 | 3870 | 4500 | 4725 |      |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 2200             | 2490             | 2770 | 3060 | 3555 | 3730 |      |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 2140             | 2415             | 2690 | 2970 | 3450 | 3620 |      |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 2040             | 2300             | 2560 | 2825 | 3285 | 3450 |      |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 1950             | 2205             | 2460 | 2710 | 3150 | 3310 |      |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  | 1860             | 2100             | 2340 | 2580 | 3000 | 3150 |      |  |
| 46"   | 6X12231                | 340/85R46 150D/153A8 TL | 352                | 1770                   | 835                     | 5345                       | W11              | 124              | 41               |      |      |      |      |      |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2  | 3.6  | 4    | 4.4  |  |
|       | Static                 |                         |                    |                        |                         |                            |                  | 4780             | 5390             | 6010 | 6625 | 7165 | 7705 |      |  |
|       | 10 km/h                |                         |                    |                        |                         |                            |                  | 3115             | 3520             | 3920 | 4320 | 4670 | 5025 |      |  |
|       | 25 km/h                |                         |                    |                        |                         |                            |                  | 2460             | 2780             | 3095 | 3410 | 3690 | 3970 |      |  |
|       | 30 km/h                |                         |                    |                        |                         |                            |                  | 2390             | 2700             | 3005 | 3310 | 3580 | 3850 |      |  |
|       | 40 km/h                |                         |                    |                        |                         |                            |                  | 2270             | 2570             | 2860 | 3155 | 3410 | 3670 |      |  |
|       | 50 km/h                |                         |                    |                        |                         |                            |                  | 2180             | 2460             | 2740 | 3025 | 3270 | 3520 |      |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  | 2080             | 2345             | 2610 | 2880 | 3115 | 3350 |      |  |
| 46"   | 6X11181                | 380/90R46 149A8/149B TL | 391                | 1868                   | 868                     | 5633                       | W12              | 150              | 47               |      |      |      |      |      |  |
|       | Max Load (kg)          |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |
|       | Speed \ Pressure (bar) | 0.6                     | 0.8                | 1                      | 1.2                     | 1.4                        | 1.6              | 2                | 2.4              | 2.8  | 3.2  | 3.6  | 4    | 4.4  |  |
|       | Static                 | 3290                    | 3890               | 4410                   | 4930                    | 5380                       | 5830             | 6650             | 7475             |      |      |      |      |      |  |
|       | 10 km/h                | 2145                    | 2535               | 2875                   | 3220                    | 3510                       | 3800             | 4340             | 4875             |      |      |      |      |      |  |
|       | 25 km/h                | 1590                    | 1875               | 2130                   | 2380                    | 2600                       | 2810             | 3210             | 3610             |      |      |      |      |      |  |
|       | 30 km/h                | 1530                    | 1810               | 2050                   | 2295                    | 2500                       | 2710             | 3095             | 3480             |      |      |      |      |      |  |
|       | 40 km/h                | 1430                    | 1690               | 1920                   | 2145                    | 2340                       | 2535             | 2890             | 3250             |      |      |      |      |      |  |
|       | 50 km/h                | 1430                    | 1690               | 1920                   | 2145                    | 2340                       | 2535             | 2890             | 3250             |      |      |      |      |      |  |
|       | 65 km/h                |                         |                    |                        |                         |                            |                  |                  |                  |      |      |      |      |      |  |

| Rim Ø   | Item number | Description               | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |       |       |       |       |       |       |
|---------|-------------|---------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|-------|-------|-------|-------|-------|-------|
| 46"     | 6X11191     | VF 380/90R46 173B/173D TL | 395                | 1868                   | 868                     | 5633                       | W13              | 181              | 47               |       |       |       |       |       |       |
|         |             | Max Load (kg)             |                    |                        |                         |                            |                  |                  |                  |       |       |       |       |       |       |
|         |             | Speed \ Pressure (bar)    | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8   | 3.2   | 3.6   | 4     | 4.4   |
|         |             | Static                    | 4635               | 5380                   | 6280                    | 6880                       | 7625             | 8220             | 9420             | 10465 | 11360 | 12410 | 13155 | 14050 | 14950 |
|         |             | 10 km/h                   | 3020               | 3510                   | 4095                    | 4485                       | 4970             | 5360             | 6140             | 6825  | 7410  | 8090  | 8580  | 9165  | 9750  |
|         |             | 25 km/h                   | 2240               | 2600                   | 3030                    | 3320                       | 3680             | 3970             | 4545             | 5050  | 5480  | 5990  | 6350  | 6780  | 7215  |
|         |             | 30 km/h                   | 2155               | 2500                   | 2920                    | 3200                       | 3550             | 3825             | 4380             | 4870  | 5285  | 5770  | 6120  | 6540  | 6955  |
|         |             | 40 km/h                   | 2075               | 2410                   | 2810                    | 3080                       | 3410             | 3680             | 4220             | 4690  | 5090  | 5560  | 5890  | 6290  | 6695  |
|         |             | 50 km/h                   | 2015               | 2340                   | 2730                    | 2990                       | 3315             | 3575             | 4095             | 4550  | 4940  | 5395  | 5720  | 6110  | 6500  |
| 65 km/h | 2015        | 2340                      | 2730               | 2990                   | 3315                    | 3575                       | 4095             | 4550             | 4940             | 5395  | 5720  | 6110  | 6500  |       |       |
| 48"     | 6X12061     | 230/95R48 136D/139A8 TL   | 230                | 1647                   | 780                     | 4984                       | W7               | 65               | 33               |       |       |       |       |       |       |
|         |             | Max Load (kg)             |                    |                        |                         |                            |                  |                  |                  |       |       |       |       |       |       |
|         |             | Speed \ Pressure (bar)    | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8   | 3.2   | 3.6   | 4     | 4.4   |
|         |             | Static                    |                    |                        |                         |                            |                  | 3020             | 3410             | 3800  | 4190  | 4535  | 4875  | 5150  |       |
|         |             | 10 km/h                   |                    |                        |                         |                            |                  | 1970             | 2225             | 2480  | 2735  | 2960  | 3180  | 3360  |       |
|         |             | 25 km/h                   |                    |                        |                         |                            |                  | 1560             | 1760             | 1960  | 2160  | 2335  | 2510  | 2650  |       |
|         |             | 30 km/h                   |                    |                        |                         |                            |                  | 1510             | 1710             | 1900  | 2100  | 2270  | 2440  | 2575  |       |
|         |             | 40 km/h                   |                    |                        |                         |                            |                  | 1440             | 1625             | 1810  | 1995  | 2160  | 2320  | 2450  |       |
|         |             | 50 km/h                   |                    |                        |                         |                            |                  | 1380             | 1560             | 1735  | 1910  | 2070  | 2225  | 2350  |       |
| 65 km/h |             |                           |                    |                        |                         | 1310                       | 1480             | 1650             | 1820             | 1970  | 2120  | 2240  |       |       |       |
| 48"     | 6X12151     | 270/95R48 142D/145A8 TL   | 286                | 1734                   | 821                     | 5243                       | W9               | 84               | 35               |       |       |       |       |       |       |
|         |             | Max Load (kg)             |                    |                        |                         |                            |                  |                  |                  |       |       |       |       |       |       |
|         |             | Speed \ Pressure (bar)    | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8   | 3.2   | 3.6   | 4     | 4.4   |
|         |             | Static                    |                    |                        |                         |                            |                  | 3780             | 4270             | 4750  | 5240  | 5670  | 6095  |       |       |
|         |             | 10 km/h                   |                    |                        |                         |                            |                  | 2465             | 2780             | 3100  | 3420  | 3700  | 3975  |       |       |
|         |             | 25 km/h                   |                    |                        |                         |                            |                  | 1950             | 2200             | 2450  | 2700  | 2920  | 3140  |       |       |
|         |             | 30 km/h                   |                    |                        |                         |                            |                  | 1890             | 2130             | 2380  | 2620  | 2830  | 3050  |       |       |
|         |             | 40 km/h                   |                    |                        |                         |                            |                  | 1800             | 2030             | 2260  | 2495  | 2700  | 2900  |       |       |
|         |             | 50 km/h                   |                    |                        |                         |                            |                  | 1725             | 1950             | 2170  | 2390  | 2590  | 2780  |       |       |
| 65 km/h |             |                           |                    |                        |                         | 1640                       | 1855             | 2070             | 2280             | 2465  | 2650  |       |       |       |       |
| 48"     | 6X12161     | 270/95R48 144D/147A8 TL   | 286                | 1734                   | 821                     | 5243                       | W9               | 85               | 35               |       |       |       |       |       |       |
|         |             | Max Load (kg)             |                    |                        |                         |                            |                  |                  |                  |       |       |       |       |       |       |
|         |             | Speed \ Pressure (bar)    | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8   | 3.2   | 3.6   | 4     | 4.4   |
|         |             | Static                    |                    |                        |                         |                            |                  | 3780             | 4270             | 4750  | 5240  | 5670  | 6095  | 6440  |       |
|         |             | 10 km/h                   |                    |                        |                         |                            |                  | 2465             | 2780             | 3100  | 3420  | 3700  | 3975  | 4200  |       |
|         |             | 25 km/h                   |                    |                        |                         |                            |                  | 1950             | 2200             | 2450  | 2700  | 2920  | 3140  | 3320  |       |
|         |             | 30 km/h                   |                    |                        |                         |                            |                  | 1890             | 2130             | 2380  | 2620  | 2830  | 3050  | 3220  |       |
|         |             | 40 km/h                   |                    |                        |                         |                            |                  | 1800             | 2030             | 2260  | 2495  | 2700  | 2900  | 3065  |       |
|         |             | 50 km/h                   |                    |                        |                         |                            |                  | 1725             | 1950             | 2170  | 2390  | 2590  | 2780  | 2940  |       |
| 65 km/h |             |                           |                    |                        |                         | 1640                       | 1855             | 2070             | 2280             | 2465  | 2650  | 2800  |       |       |       |
| 48"     | 6X12241     | 340/85R48 152D/155A8 TL   | 339                | 1803                   | 850                     | 5463                       | W11              | 109              | 37               |       |       |       |       |       |       |
|         |             | Max Load (kg)             |                    |                        |                         |                            |                  |                  |                  |       |       |       |       |       |       |
|         |             | Speed \ Pressure (bar)    | 0.6                | 0.8                    | 1                       | 1.2                        | 1.4              | 1.6              | 2                | 2.4   | 2.8   | 3.2   | 3.6   | 4     | 4.4   |
|         |             | Static                    |                    |                        |                         |                            |                  | 4920             | 5555             | 6190  | 6820  | 7380  | 7935  | 8165  |       |
|         |             | 10 km/h                   |                    |                        |                         |                            |                  | 3210             | 3620             | 4040  | 4450  | 4810  | 5175  | 5325  |       |
|         |             | 25 km/h                   |                    |                        |                         |                            |                  | 2535             | 2860             | 3190  | 3515  | 3800  | 4090  | 4210  |       |
|         |             | 30 km/h                   |                    |                        |                         |                            |                  | 2460             | 2780             | 3095  | 3410  | 3690  | 3970  | 4080  |       |
|         |             | 40 km/h                   |                    |                        |                         |                            |                  | 2340             | 2640             | 2950  | 3250  | 3510  | 3780  | 3890  |       |
|         |             | 50 km/h                   |                    |                        |                         |                            |                  | 2245             | 2535             | 2825  | 3115  | 3370  | 3620  | 3730  |       |
| 65 km/h |             |                           |                    |                        |                         | 2140                       | 2415             | 2690             | 2970             | 3210  | 3450  | 3550  |       |       |       |


| Rim Ø | Item number | Description             | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |                        |      |      |      |      |      |      |      |      |      |      |      |      |     |
|-------|-------------|-------------------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|------------------------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| 50"   | 6X11811     | 320/90R50 150A8/150B TL | 305                | 1828                   | 854                     | 5527                       | W10              | 105              | 36               |                        |      |      |      |      |      |      |      |      |      |      |      |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | Max Load (kg)          |      |      |      |      |      |      |      |      |      |      |      |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | Speed \ Pressure (bar) | 0.6  | 0.8  | 1    | 1.2  | 1.4  | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6  | 4    | 4.4 |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | Static                 | 2680 | 3190 | 3620 | 4060 | 4420 | 4780 | 5430 | 6470 | 7090 | 7245 | 7705 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 10 km/h                | 1750 | 2080 | 2360 | 2645 | 2880 | 3120 | 3540 | 4220 | 4620 | 4725 | 5025 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 25 km/h                | 1290 | 1540 | 1750 | 1960 | 2130 | 2310 | 2620 | 3120 | 3420 | 3500 | 3720 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 30 km/h                | 1250 | 1480 | 1685 | 1890 | 2055 | 2225 | 2530 | 3010 | 3300 | 3370 | 3585 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 40 km/h                | 1165 | 1385 | 1575 | 1760 | 1920 | 2080 | 2360 | 2810 | 3080 | 3150 | 3350 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 50 km/h                | 1165 | 1385 | 1575 | 1760 | 1920 | 2080 | 2360 | 2810 | 3080 | 3150 | 3350 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 65 km/h                |      |      |      |      |      |      |      |      |      |      |      |      |     |
| 52"   | 6X12191     | 300/95R52 149D/152A8 TL | 305                | 1889                   | 895                     | 5712                       | W9               | 99               | 37               |                        |      |      |      |      |      |      |      |      |      |      |      |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | Max Load (kg)          |      |      |      |      |      |      |      |      |      |      |      |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | Speed \ Pressure (bar) | 0.6  | 0.8  | 1    | 1.2  | 1.4  | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6  | 4    | 4.4 |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | Static                 |      |      |      |      |      | 4635 | 5230 | 5830 | 6430 | 6950 | 7475 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 10 km/h                |      |      |      |      |      | 3020 | 3410 | 3800 | 4190 | 4530 | 4875 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 25 km/h                |      |      |      |      |      | 2390 | 2695 | 3000 | 3310 | 3580 | 3850 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 30 km/h                |      |      |      |      |      | 2320 | 2615 | 2915 | 3210 | 3475 | 3740 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 40 km/h                |      |      |      |      |      | 2205 | 2490 | 2775 | 3060 | 3310 | 3560 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 50 km/h                |      |      |      |      |      | 2115 | 2390 | 2660 | 2935 | 3170 | 3410 |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 65 km/h                |      |      |      |      |      | 2015 | 2275 | 2535 | 2795 | 3020 | 3250 |      |     |
| 52"   | 6X12201     | 300/95R52 151D/154A8 TL | 305                | 1889                   | 895                     | 5712                       | W9               | 100              | 37               |                        |      |      |      |      |      |      |      |      |      |      |      |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | Max Load (kg)          |      |      |      |      |      |      |      |      |      |      |      |      |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | Speed \ Pressure (bar) | 0.6  | 0.8  | 1    | 1.2  | 1.4  | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6  | 4    | 4.4 |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | Static                 |      |      |      |      |      | 4635 | 5230 | 5830 | 6430 | 6950 | 7475 | 7935 |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 10 km/h                |      |      |      |      |      | 3020 | 3410 | 3800 | 4190 | 4530 | 4875 | 5175 |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 25 km/h                |      |      |      |      |      | 2390 | 2695 | 3000 | 3310 | 3580 | 3850 | 4090 |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 30 km/h                |      |      |      |      |      | 2320 | 2615 | 2915 | 3210 | 3475 | 3740 | 3970 |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 40 km/h                |      |      |      |      |      | 2205 | 2490 | 2775 | 3060 | 3310 | 3560 | 3780 |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 50 km/h                |      |      |      |      |      | 2115 | 2390 | 2660 | 2935 | 3170 | 3410 | 3620 |     |
|       |             |                         |                    |                        |                         |                            |                  |                  |                  | 65 km/h                |      |      |      |      |      | 2015 | 2275 | 2535 | 2795 | 3020 | 3250 | 3450 |     |

## FARM SPECIALIST FLOTATION BIAS/ BIAS LIGHT

### Towed Vehicles And Large Implements

The Farm Specialist FB is a tubeless flotation tire made to protect your soil with low compaction. It provides a high load capacity at low inflation pressures, thus preventing damages to fields and crops. It offers enhanced durability due to the strong casing construction and compounds used.

The Farm Specialist FB Light is a tubeless flotation tire offering an alternate tread design and lower weight as compared to the FB. It provides a high load capacity at low inflation pressures, thus preventing damages to fields and crops.

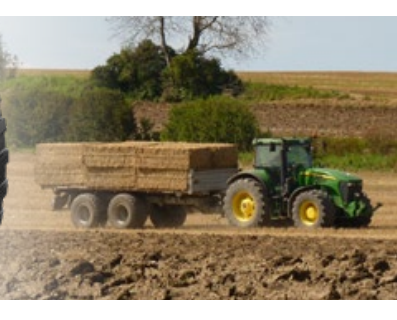

|       |             |                                               |          |                    |                        |                         | LI/SI        |             | Inflation Pressure | Max Load [kg] |              |           |           |           |             |           |           |      |             |                  |
|-------|-------------|-----------------------------------------------|----------|--------------------|------------------------|-------------------------|--------------|-------------|--------------------|---------------|--------------|-----------|-----------|-----------|-------------|-----------|-----------|------|-------------|------------------|
|       |             |                                               |          |                    |                        |                         | Free Rolling | Drive Wheel |                    | Bar           | Free Rolling |           |           |           | Drive Wheel |           |           |      | Weight [kg] | Tread depth [mm] |
| Rim Ø | Item number | Description                                   | Star /PR | Section Width [mm] | Overall Dia-meter [mm] | Recom. Rim Width [inch] |              |             | 10 [km/h]          |               | 25 [km/h]    | 40 [km/h] | 50 [km/h] | 10 [km/h] | 25 [km/h]   | 40 [km/h] | 50 [km/h] |      |             |                  |
| 15.5" | 6X10191     | 400/60-15.5 145A8 TL Farm Specialist FB       | 14       | 405                | 875                    | 13                      | 145A8        | 132A8       | 3.6                |               | 4060         | 3450      | 2900      | 2610      | 2800        | 2380      | 2000      | 1800 | 35.5        | 16               |
| 22.5" | 6X10231     | 500/60-22.5 163A8 TL Farm Specialist FB       | 16       | 510                | 1180                   | 16                      | 163A8        | 151A8       | 3.2                |               | 6830         | 5800      | 4875      | 4390      | 4830        | 4110      | 3450      | 3110 | 90.5        | 25.5             |
|       | 6X10221     | 500/60-22.5 163A8 TL Farm Specialist FB Light | 16       | 476                | 1170                   | 16                      | 163A8        | 151A8       | 3.2                |               | 6830         | 5800      | 4875      | 4390      | 4830        | 4110      | 3450      | 3110 | 86          | 20               |
|       | 6X10261     | 550/60-22.5 166A8 TL Farm Specialist FB       | 16       | 550                | 1238                   | 16 DC                   | 167A8        | 154A8       | 3                  |               | 7630         | 6490      | 5450      | 4910      | 5250        | 4460      | 3750      | 3380 | 108.5       | 20               |
|       | 6X10251     | 550/60-22.5 166A8 TL Farm Specialist FB Light | 16       | 550                | 1238                   | 16 DC                   | 167A8        | 154A8       | 2.8                |               | 7630         | 6490      | 5450      | 4910      | 5250        | 4460      | 3750      | 3380 | 94.5        | 20               |
|       | 6X10271     | 560/45-22.5 160A8 TL Farm Specialist FB       | 16       | 543                | 1076                   | 16                      | 160A8        | 148A8       | 3.2                |               | 6300         | 5360      | 4500      | 4050      | 4410        | 3750      | 3150      | 2840 | 79.5        | 25               |
|       | 6X10301     | 600/50-22.5 165A8 TL Farm Specialist FB       | 16       | 610                | 1180                   | 20                      | 165A8        | 153A8       | 2.6                |               | 7210         | 6130      | 5150      | 4640      | 5110        | 4340      | 3650      | 3290 | 105         | 25.5             |
|       | 6X10291     | 600/50-22.5 165A8 TL Farm Specialist FB Light | 16       | 576                | 1170                   | 20                      | 165A8        | 153A8       | 2.6                |               | 7210         | 6130      | 5150      | 4640      | 5110        | 4340      | 3650      | 3290 | 97          | 20               |
|       | 6X10311     | 600/55-22.5 169A8 TL Farm Specialist FB       | 16       | 600                | 1235                   | 20                      | 169A8        | 156A8       | 2.6                |               | 8120         | 6900      | 5800      | 5220      | 5600        | 4760      | 4000      | 3600 | 108         | 20               |
|       | 6X10341     | 700/40-22.5 166A8 TL Farm Specialist FB       | 16       | 710                | 1180                   | 24                      | 166A8        | 154A8       | 2.6                |               | 7420         | 6310      | 5300      | 4770      | 5250        | 4460      | 3750      | 3380 | 120         | 25.5             |
|       | 6X10321     | 700/40-22.5 166A8 TL Farm Specialist FB Light | 16       | 676                | 1170                   | 24                      | 166A8        | 154A8       | 2.6                |               | 7420         | 6310      | 5300      | 4770      | 5250        | 4460      | 3750      | 3380 | 112.5       | 20               |
|       | 6X10331     | 700/40-22.5 168A8 TL Farm Specialist FB Light | 18       | 676                | 1170                   | 24                      | 168A8        | 156A8       | 3.4                |               | 7840         | 6660      | 5600      | 5040      | 5600        | 4750      | 4000      | 3600 | 116         | 20               |
|       | 6X10351     | 700/50-22.5 174A8 TL Farm Specialist FB       | 16       | 700                | 1270                   | 24                      | 174A8        | 162A8       | 2.8                |               | 9380         | 7970      | 6700      | 6030      | 6650        | 5650      | 4750      | 4280 | 124.5       | 20               |
| 26.5" | 6X10361     | 600/55-26.5 170A8 TL Farm Specialist FB       | 16       | 591                | 1333                   | 20                      | 170A8        | 159A8       | 2.6                |               | 8400         | 7140      | 6000      | 5400      | 6130        | 5210      | 4375      | 3940 | 130         | 25               |
|       | 6X10381     | 700/50-26.5 174A8 TL Farm Specialist FB       | 16       | 700                | 1333                   | 24                      | 174A8        | 162A8       | 2.4                |               | 9380         | 7970      | 6700      | 6030      | 6650        | 5650      | 4750      | 4280 | 148         | 25               |
|       | 6X10391     | 800/45-26.5 177A8 TL Farm Specialist FB       | 16       | 800                | 1333                   | 28                      | 177A8        | 164A8       | 2.2                |               | 10220        | 8690      | 7300      | 6570      | 7000        | 5950      | 5000      | 4500 | 156         | 25               |
| 30.5" | 6X10421     | 750/60-30.5 182A8 TL Farm Specialist FB       | 16       | 750                | 1670                   | 24                      | 182A8        | 170A8       | 2.2                |               | 11900        | 10120     | 8500      | 7650      | 8400        | 7140      | 6000      | 5400 | 221.5       | 25.4             |
|       | 6X10411     | 850/50-30.5 186A8 TL Farm Specialist FB       | 16       | 850                | 1670                   | 28                      | 186A8        | 174A8       | 2.2                |               | 13300        | 11310     | 9500      | 8550      | 9380        | 7970      | 6700      | 6030 | 241         | 25.4             |

## FARM SPECIALIST FLOTATION RADIAL

### Heavy Duty Flotation Applications

A flotation and transport tire mainly designed for field use including spreaders, trailers and implements. Wide profile results in an extended contact area to reduce soil compaction and increase crop yield. Product life also elongated by reinforced tread and flank protection.



FR-Trac

FR-G / FR-G Steel

| Rim Ø | Item number | Description | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |
|-------|-------------|-------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|
|-------|-------------|-------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|

#### Farm Specialist FR Trac



|                        |         |                   |      |      |      |      |       |      |      |
|------------------------|---------|-------------------|------|------|------|------|-------|------|------|
| 17"                    | 6X10111 | 500/50R17 145D TL | 497  | 925  | 412  | 2780 | 16.00 | 52,5 | 15   |
| Max Load (kg)          |         |                   |      |      |      |      |       |      |      |
| Speed \ Pressure (bar) | 1       | 1.2               | 1.6  | 2    | 2.4  | 2.8  | 3.2   | 3.6  | 4    |
| Static                 | 2935    | 3270              | 3870 | 4400 | 4935 | 5400 | 5800  | 6270 | 6670 |
| 10 km/h                | 2300    | 2560              | 3030 | 3445 | 3860 | 4230 | 4540  | 4910 | 5220 |
| 25 km/h                | 2015    | 2245              | 2660 | 3020 | 3390 | 3710 | 3985  | 4310 | 4580 |
| 30 km/h                | 1930    | 2145              | 2540 | 2890 | 3240 | 3550 | 3810  | 4115 | 4380 |
| 40 km/h                | 1735    | 1930              | 2290 | 2600 | 2920 | 3195 | 3430  | 3710 | 3940 |
| 50 km/h                | 1540    | 1720              | 2035 | 2315 | 2600 | 2840 | 3050  | 3300 | 3510 |
| 60 km/h                | 1365    | 1520              | 1800 | 2050 | 2295 | 2510 | 2700  | 2920 | 3100 |
| 65 km/h                | 1275    | 1420              | 1680 | 1910 | 2145 | 2350 | 2520  | 2725 | 2900 |

#### Farm Specialist FR Trac

|                                                                                     |                        |         |                     |      |      |      |      |      |      |       |      |    |
|-------------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|------|------|-------|------|----|
|  | 22.5"                  | 6X10121 | 500/60R22.5 155D TL |      |      | 483  | 1186 | 537  | 3558 | 16.00 | 84,5 | 26 |
|                                                                                     | Max Load (kg)          |         |                     |      |      |      |      |      |      |       |      |    |
|                                                                                     | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6  | 4     |      |    |
|                                                                                     | Static                 | 3920    | 4370                | 5170 | 5880 | 6595 | 7220 | 7750 | 8380 | 8910  |      |    |
|                                                                                     | 10 km/h                | 3070    | 3420                | 4045 | 4600 | 5160 | 5650 | 6070 | 6560 | 6975  |      |    |
|                                                                                     | 25 km/h                | 2690    | 3000                | 3550 | 4040 | 4530 | 4960 | 5330 | 5755 | 6120  |      |    |
|                                                                                     | 30 km/h                | 2575    | 2870                | 3390 | 3860 | 4330 | 4740 | 5090 | 5500 | 5850  |      |    |
|                                                                                     | 40 km/h                | 2320    | 2580                | 3060 | 3480 | 3900 | 4270 | 4585 | 4950 | 5270  |      |    |
|                                                                                     | 50 km/h                | 2060    | 2300                | 2720 | 3095 | 3470 | 3800 | 4080 | 4410 | 4690  |      |    |
|                                                                                     | 60 km/h                | 1820    | 2030                | 2405 | 2740 | 3070 | 3360 | 3610 | 3900 | 4145  |      |    |
|                                                                                     | 65 km/h                | 1705    | 1900                | 2250 | 2560 | 2870 | 3140 | 3370 | 3640 | 3875  |      |    |

#### Farm Specialist FR-G

|                                                                                     |                        |         |                     |      |      |      |      |      |      |       |    |    |
|-------------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|------|------|-------|----|----|
|  | 22.5"                  | 6X09911 | 500/60R22.5 155D TL |      |      | 506  | 1170 | 528  | 3509 | 16.00 | 93 | 25 |
|                                                                                     | Max Load (kg)          |         |                     |      |      |      |      |      |      |       |    |    |
|                                                                                     | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6  | 4     |    |    |
|                                                                                     | Static                 | 3920    | 4370                | 5170 | 5880 | 6595 | 7220 | 7750 | 8380 | 8910  |    |    |
|                                                                                     | 10 km/h                | 3070    | 3420                | 4045 | 4600 | 5160 | 5650 | 6070 | 6560 | 6975  |    |    |
|                                                                                     | 25 km/h                | 2690    | 3000                | 3550 | 4040 | 4530 | 4960 | 5330 | 5755 | 6120  |    |    |
|                                                                                     | 30 km/h                | 2575    | 2870                | 3390 | 3860 | 4330 | 4740 | 5090 | 5500 | 5850  |    |    |
|                                                                                     | 40 km/h                | 2320    | 2580                | 3060 | 3480 | 3900 | 4270 | 4585 | 4950 | 5270  |    |    |
|                                                                                     | 50 km/h                | 2060    | 2300                | 2720 | 3095 | 3470 | 3800 | 4080 | 4410 | 4690  |    |    |
|                                                                                     | 60 km/h                | 1820    | 2030                | 2405 | 2740 | 3070 | 3360 | 3610 | 3900 | 4145  |    |    |
|                                                                                     | 65 km/h                | 1705    | 1900                | 2250 | 2560 | 2870 | 3140 | 3370 | 3640 | 3875  |    |    |

| Rim Ø | Item number | Description | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |
|-------|-------------|-------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|
|-------|-------------|-------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|

#### Farm Specialist FR Trac

|                                                                                   |                        |         |                     |      |      |      |      |      |      |       |    |    |
|-----------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|------|------|-------|----|----|
|  | 22.5"                  | 6X10131 | 560/45R22.5 152D TL |      |      | 523  | 1085 | 486  | 3266 | 16.00 | 85 | 25 |
|                                                                                   | Max Load (kg)          |         |                     |      |      |      |      |      |      |       |    |    |
|                                                                                   | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6  | 4     |    |    |
|                                                                                   | Static                 | 3590    | 4000                | 4735 | 5390 | 6040 | 6610 | 7100 | 7675 | 8165  |    |    |
|                                                                                   | 10 km/h                | 2810    | 3130                | 3705 | 4220 | 4730 | 5175 | 5560 | 6010 | 6390  |    |    |
|                                                                                   | 25 km/h                | 2470    | 2750                | 3250 | 3700 | 4150 | 4540 | 4880 | 5270 | 5610  |    |    |
|                                                                                   | 30 km/h                | 2360    | 2630                | 3110 | 3540 | 3970 | 4340 | 4660 | 5040 | 5360  |    |    |
|                                                                                   | 40 km/h                | 2120    | 2365                | 2800 | 3185 | 3570 | 3910 | 4200 | 4540 | 4830  |    |    |
|                                                                                   | 50 km/h                | 1890    | 2105                | 2490 | 2835 | 3180 | 3480 | 3740 | 4040 | 4295  |    |    |
|                                                                                   | 60 km/h                | 1670    | 1860                | 2200 | 2510 | 2810 | 3080 | 3305 | 3570 | 3800  |    |    |
|                                                                                   | 65 km/h                | 1560    | 1740                | 2060 | 2340 | 2630 | 2875 | 3090 | 3340 | 3550  |    |    |

#### Farm Specialist FR-G

|                                                                                   |                        |         |                     |      |      |      |      |      |      |       |      |    |
|-----------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|------|------|-------|------|----|
|  | 22.5"                  | 6X09921 | 560/45R22.5 152D TL |      |      | 538  | 1072 | 480  | 3220 | 16.00 | 88,5 | 25 |
|                                                                                   | Max Load (kg)          |         |                     |      |      |      |      |      |      |       |      |    |
|                                                                                   | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6  | 4     |      |    |
|                                                                                   | Static                 | 3590    | 4000                | 4735 | 5390 | 6040 | 6610 | 7100 | 7675 | 8165  |      |    |
|                                                                                   | 10 km/h                | 2810    | 3130                | 3705 | 4220 | 4730 | 5175 | 5560 | 6010 | 6390  |      |    |
|                                                                                   | 25 km/h                | 2470    | 2750                | 3250 | 3700 | 4150 | 4540 | 4880 | 5270 | 5610  |      |    |
|                                                                                   | 30 km/h                | 2360    | 2630                | 3110 | 3540 | 3970 | 4340 | 4660 | 5040 | 5360  |      |    |
|                                                                                   | 40 km/h                | 2120    | 2365                | 2800 | 3185 | 3570 | 3910 | 4200 | 4540 | 4830  |      |    |
|                                                                                   | 50 km/h                | 1890    | 2105                | 2490 | 2835 | 3180 | 3480 | 3740 | 4040 | 4295  |      |    |
|                                                                                   | 60 km/h                | 1670    | 1860                | 2200 | 2510 | 2810 | 3080 | 3305 | 3570 | 3800  |      |    |
|                                                                                   | 65 km/h                | 1560    | 1740                | 2060 | 2340 | 2630 | 2875 | 3090 | 3340 | 3550  |      |    |

#### Farm Specialist FR Trac

|                                                                                     |                        |         |                     |      |      |      |      |      |       |       |      |    |
|-------------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|------|-------|-------|------|----|
|  | 22.5"                  | 6X10141 | 560/60R22.5 161D TL |      |      | 522  | 1277 | 570  | 3837  | 16.00 | 89,5 | 20 |
|                                                                                     | Max Load (kg)          |         |                     |      |      |      |      |      |       |       |      |    |
|                                                                                     | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6   | 4     |      |    |
|                                                                                     | Static                 | 4680    | 5210                | 6170 | 7020 | 7870 | 8615 | 9255 | 10000 | 10640 |      |    |
|                                                                                     | 10 km/h                | 3660    | 4080                | 4830 | 5495 | 6160 | 6740 | 7240 | 7825  | 8325  |      |    |
|                                                                                     | 25 km/h                | 3215    | 3580                | 4240 | 4820 | 5410 | 5920 | 6360 | 6870  | 7310  |      |    |
|                                                                                     | 30 km/h                | 3070    | 3420                | 4050 | 4610 | 5170 | 5660 | 6075 | 6565  | 6980  |      |    |
|                                                                                     | 40 km/h                | 2770    | 3080                | 3650 | 4150 | 4655 | 5095 | 5470 | 5910  | 6290  |      |    |
|                                                                                     | 50 km/h                | 2460    | 2740                | 3245 | 3690 | 4140 | 4530 | 4870 | 5260  | 5595  |      |    |
|                                                                                     | 60 km/h                | 2180    | 2425                | 2870 | 3265 | 3660 | 4010 | 4305 | 4650  | 4950  |      |    |
| 65 km/h                                                                             | 2035                   | 2265    | 2680                | 3050 | 3420 | 3745 | 4020 | 4350 | 4625  |       |      |    |

#### Farm Specialist FR-G

|                                                                                     |                        |         |                     |      |      |      |      |      |       |       |     |    |
|-------------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|------|-------|-------|-----|----|
|  | 22.5"                  | 6X09931 | 560/60R22.5 161D TL |      |      | 562  | 1256 | 559  | 3767  | 16.00 | 109 | 25 |
|                                                                                     | Max Load (kg)          |         |                     |      |      |      |      |      |       |       |     |    |
|                                                                                     | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6   | 4     |     |    |
|                                                                                     | Static                 | 4680    | 5210                | 6170 | 7020 | 7870 | 8615 | 9255 | 10000 | 10640 |     |    |
|                                                                                     | 10 km/h                | 3660    | 4080                | 4830 | 5495 | 6160 | 6740 | 7240 | 7825  | 8325  |     |    |
|                                                                                     | 25 km/h                | 3215    | 3580                | 4240 | 4820 | 5410 | 5920 | 6360 | 6870  | 7310  |     |    |
|                                                                                     | 30 km/h                | 3070    | 3420                | 4050 | 4610 | 5170 | 5660 | 6075 | 6565  | 6980  |     |    |
|                                                                                     | 40 km/h                | 2770    | 3080                | 3650 | 4150 | 4655 | 5095 | 5470 | 5910  | 6290  |     |    |
|                                                                                     | 50 km/h                | 2460    | 2740                | 3245 | 3690 | 4140 | 4530 | 4870 | 5260  | 5595  |     |    |
|                                                                                     | 60 km/h                | 2180    | 2425                | 2870 | 3265 | 3660 | 4010 | 4305 | 4650  | 4950  |     |    |
| 65 km/h                                                                             | 2035                   | 2265    | 2680                | 3050 | 3420 | 3745 | 4020 | 4350 | 4625  |       |     |    |

| Rim<br>Ø | Item number | Description | Section<br>Width<br>(mm) | Outsider<br>Diameter<br>(mm) | Static Load<br>Radius<br>(mm) | Rolling<br>Circum-<br>ference<br>(mm) | Recom.<br>Rim<br>Width | Tire Weight<br>(kg) | Tread Depth<br>(mm) |
|----------|-------------|-------------|--------------------------|------------------------------|-------------------------------|---------------------------------------|------------------------|---------------------|---------------------|
|----------|-------------|-------------|--------------------------|------------------------------|-------------------------------|---------------------------------------|------------------------|---------------------|---------------------|

### Farm Specialist FR-G Steel

|                                                                                   |                        |         |                     |      |      |      |      |      |       |       |       |    |
|-----------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|------|-------|-------|-------|----|
|  | 22.5"                  | 6X09941 | 560/60R22.5 164D TL |      |      | 562  | 1256 | 559  | 3767  | 16.00 | 113   | 25 |
|                                                                                   | Max Load (kg)          |         |                     |      |      |      |      |      |       |       |       |    |
|                                                                                   | Speed \ Pressure (bar) | 1       | 1.2                 | 1.5  | 1.6  | 2    | 2.4  | 2.8  | 3.2   | 3.6   | 4     |    |
|                                                                                   | Static                 | 5060    | 5635                | 6440 | 6670 | 7590 | 8510 | 9315 | 10005 | 10810 | 11500 |    |
|                                                                                   | 10 km/h                | 3960    | 4410                | 5040 | 5220 | 5940 | 6660 | 7290 | 7830  | 8460  | 9000  |    |
|                                                                                   | 25 km/h                | 3475    | 3870                | 4420 | 4580 | 5210 | 5845 | 6400 | 6870  | 7425  | 7900  |    |
|                                                                                   | 30 km/h                | 3320    | 3700                | 4230 | 4380 | 4980 | 5590 | 6115 | 6570  | 7100  | 7550  |    |
|                                                                                   | 40 km/h                | 2990    | 3330                | 3810 | 3940 | 4490 | 5030 | 5510 | 5915  | 6390  | 6800  |    |
|                                                                                   | 50 km/h                | 2660    | 2965                | 3390 | 3510 | 3990 | 4480 | 4900 | 5260  | 5690  | 6050  |    |
|                                                                                   | 60 km/h                | 2350    | 2620                | 2995 | 3100 | 3530 | 3960 | 4330 | 4655  | 5030  | 5350  |    |
|                                                                                   | 65 km/h                | 2200    | 2450                | 2800 | 2900 | 3300 | 3700 | 4050 | 4350  | 4700  | 5000  |    |

### Farm Specialist FR Trac

|                                                                                    |                        |         |                     |      |      |      |      |      |      |       |       |    |
|------------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|------|------|-------|-------|----|
|  | 22.5"                  | 6X10151 | 600/50R22.5 159D TL |      |      | 580  | 1185 | 536  | 3556 | 20.00 | 103,5 | 26 |
|                                                                                    | Max Load (kg)          |         |                     |      |      |      |      |      |      |       |       |    |
|                                                                                    | Speed \ Pressure (bar) | 1       | 1.2                 | 1.5  | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6   | 4     |    |
|                                                                                    | Static                 | 4430    | 4930                | 5485 | 5835 | 6640 | 7445 | 8150 | 8750 | 9460  | 10060 |    |
|                                                                                    | 10 km/h                | 3465    | 3860                | 4290 | 4570 | 5200 | 5830 | 6380 | 6850 | 7400  | 7875  |    |
|                                                                                    | 25 km/h                | 3040    | 3390                | 3770 | 4010 | 4560 | 5115 | 5600 | 6010 | 6500  | 6910  |    |
|                                                                                    | 30 km/h                | 2910    | 3240                | 3600 | 3830 | 4360 | 4890 | 5350 | 5750 | 6210  | 6605  |    |
|                                                                                    | 40 km/h                | 2620    | 2915                | 3240 | 3450 | 3930 | 4400 | 4820 | 5180 | 5590  | 5950  |    |
|                                                                                    | 50 km/h                | 2330    | 2590                | 2885 | 3070 | 3490 | 3920 | 4290 | 4605 | 4975  | 5290  |    |
|                                                                                    | 60 km/h                | 2060    | 2290                | 2550 | 2715 | 3090 | 3460 | 3790 | 4070 | 4400  | 4680  |    |
|                                                                                    | 65 km/h                | 1925    | 2140                | 2385 | 2540 | 2890 | 3240 | 3540 | 3805 | 4110  | 4375  |    |

### Farm Specialist FR-G

|                                                                                     |                        |         |                     |      |      |      |      |      |      |       |       |    |
|-------------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|------|------|-------|-------|----|
|  | 22.5"                  | 6X09951 | 600/50R22.5 159D TL |      |      | 608  | 1168 | 522  | 3507 | 20.00 | 104   | 25 |
|                                                                                     | Max Load (kg)          |         |                     |      |      |      |      |      |      |       |       |    |
|                                                                                     | Speed \ Pressure (bar) | 1       | 1.2                 | 1.5  | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6   | 4     |    |
|                                                                                     | Static                 | 4430    | 4930                | 5635 | 5835 | 6640 | 7445 | 8150 | 8750 | 9460  | 10060 |    |
|                                                                                     | 10 km/h                | 3465    | 3860                | 4410 | 4570 | 5200 | 5830 | 6380 | 6850 | 7400  | 7875  |    |
|                                                                                     | 25 km/h                | 3040    | 3390                | 3870 | 4010 | 4560 | 5115 | 5600 | 6010 | 6500  | 6910  |    |
|                                                                                     | 30 km/h                | 2910    | 3240                | 3700 | 3830 | 4360 | 4890 | 5350 | 5750 | 6210  | 6605  |    |
|                                                                                     | 40 km/h                | 2620    | 2915                | 3330 | 3450 | 3930 | 4400 | 4820 | 5180 | 5590  | 5950  |    |
|                                                                                     | 50 km/h                | 2330    | 2590                | 2965 | 3070 | 3490 | 3920 | 4290 | 4605 | 4975  | 5290  |    |
|                                                                                     | 60 km/h                | 2060    | 2290                | 2620 | 2715 | 3090 | 3460 | 3790 | 4070 | 4400  | 4680  |    |
| 65 km/h                                                                             | 1925                   | 2140    | 2450                | 2540 | 2890 | 3240 | 3540 | 3805 | 4110 | 4375  |       |    |

### Farm Specialist FR-G

|                                                                                     |                        |               |                     |      |      |      |      |      |       |       |       |    |
|-------------------------------------------------------------------------------------|------------------------|---------------|---------------------|------|------|------|------|------|-------|-------|-------|----|
|  | 22.5"                  | 6X09961       | 600/55R22.5 162D TL |      |      | 610  | 1214 | 537  | 3643  | 20.00 | 121,5 | 25 |
|                                                                                     |                        | Max Load (kg) |                     |      |      |      |      |      |       |       |       |    |
|                                                                                     | Speed \ Pressure (bar) | 1             | 1.2                 | 1.6  | 2    | 2.4  | 2.8  | 3.2  | 3.6   | 4     |       |    |
|                                                                                     | Static                 | 4810          | 5350                | 6340 | 7210 | 8085 | 8850 | 9505 | 10270 | 10925 |       |    |
|                                                                                     | 10 km/h                | 3760          | 4190                | 4960 | 5640 | 6330 | 6925 | 7440 | 8040  | 8550  |       |    |
|                                                                                     | 25 km/h                | 3300          | 3680                | 4350 | 4950 | 5550 | 6080 | 6530 | 7055  | 7505  |       |    |
|                                                                                     | 30 km/h                | 3155          | 3515                | 4160 | 4730 | 5310 | 5810 | 6240 | 6740  | 7170  |       |    |
|                                                                                     | 40 km/h                | 2840          | 3165                | 3750 | 4260 | 4780 | 5230 | 5620 | 6070  | 6460  |       |    |
|                                                                                     | 50 km/h                | 2530          | 2815                | 3330 | 3790 | 4250 | 4655 | 5000 | 5400  | 5750  |       |    |
|                                                                                     | 60 km/h                | 2235          | 2490                | 2950 | 3350 | 3760 | 4120 | 4420 | 4780  | 5080  |       |    |
|                                                                                     | 65 km/h                | 2090          | 2330                | 2755 | 3135 | 3515 | 3850 | 4130 | 4465  | 4750  |       |    |

| Rim Ø | Item number | Description | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom. Rim Width | Tire Weight (kg) | Tread Depth (mm) |
|-------|-------------|-------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|
|-------|-------------|-------------|--------------------|------------------------|-------------------------|----------------------------|------------------|------------------|------------------|

#### Farm Specialist FR-G

|                        |         |                     |     |      |     |      |       |       |    |
|------------------------|---------|---------------------|-----|------|-----|------|-------|-------|----|
| 22.5"                  | 6X09971 | 650/50R22.5 163D TL | 654 | 1208 | 532 | 3619 | 20.00 | 127,5 | 25 |
| Max Load (kg)          |         |                     |     |      |     |      |       |       |    |
| Speed \ Pressure (bar) |         |                     |     |      |     |      |       |       |    |
| Static                 |         |                     |     |      |     |      |       |       |    |
| 10 km/h                |         |                     |     |      |     |      |       |       |    |
| 25 km/h                |         |                     |     |      |     |      |       |       |    |
| 30 km/h                |         |                     |     |      |     |      |       |       |    |
| 40 km/h                |         |                     |     |      |     |      |       |       |    |
| 50 km/h                |         |                     |     |      |     |      |       |       |    |
| 60 km/h                |         |                     |     |      |     |      |       |       |    |
| 65 km/h                |         |                     |     |      |     |      |       |       |    |

#### Farm Specialist FR Trac

|                        |         |                     |     |      |     |      |       |       |    |
|------------------------|---------|---------------------|-----|------|-----|------|-------|-------|----|
| 22.5"                  | 6X10161 | 710/45R22.5 165D TL | 678 | 1189 | 530 | 3567 | 24.00 | 117,5 | 26 |
| Max Load (kg)          |         |                     |     |      |     |      |       |       |    |
| Speed \ Pressure (bar) |         |                     |     |      |     |      |       |       |    |
| Static                 |         |                     |     |      |     |      |       |       |    |
| 10 km/h                |         |                     |     |      |     |      |       |       |    |
| 25 km/h                |         |                     |     |      |     |      |       |       |    |
| 30 km/h                |         |                     |     |      |     |      |       |       |    |
| 40 km/h                |         |                     |     |      |     |      |       |       |    |
| 50 km/h                |         |                     |     |      |     |      |       |       |    |
| 60 km/h                |         |                     |     |      |     |      |       |       |    |
| 65 km/h                |         |                     |     |      |     |      |       |       |    |

#### Farm Specialist FR-G

|                        |         |                     |     |      |     |      |       |       |    |
|------------------------|---------|---------------------|-----|------|-----|------|-------|-------|----|
| 22.5"                  | 6X09981 | 710/45R22.5 165D TL | 710 | 1189 | 530 | 3567 | 24.00 | 137,5 | 25 |
| Max Load (kg)          |         |                     |     |      |     |      |       |       |    |
| Speed \ Pressure (bar) |         |                     |     |      |     |      |       |       |    |
| Static                 |         |                     |     |      |     |      |       |       |    |
| 10 km/h                |         |                     |     |      |     |      |       |       |    |
| 25 km/h                |         |                     |     |      |     |      |       |       |    |
| 30 km/h                |         |                     |     |      |     |      |       |       |    |
| 40 km/h                |         |                     |     |      |     |      |       |       |    |
| 50 km/h                |         |                     |     |      |     |      |       |       |    |
| 60 km/h                |         |                     |     |      |     |      |       |       |    |
| 65 km/h                |         |                     |     |      |     |      |       |       |    |

#### Farm Specialist FR trac

|                        |         |                     |     |      |     |      |       |     |    |
|------------------------|---------|---------------------|-----|------|-----|------|-------|-----|----|
| 26.5"                  | 6X10171 | 600/55R26.5 165D TL | 587 | 1361 | 608 | 4046 | 20.00 | 123 | 26 |
| Max Load (kg)          |         |                     |     |      |     |      |       |     |    |
| Speed \ Pressure (bar) |         |                     |     |      |     |      |       |     |    |
| Static                 |         |                     |     |      |     |      |       |     |    |
| 10 km/h                |         |                     |     |      |     |      |       |     |    |
| 25 km/h                |         |                     |     |      |     |      |       |     |    |
| 30 km/h                |         |                     |     |      |     |      |       |     |    |
| 40 km/h                |         |                     |     |      |     |      |       |     |    |
| 50 km/h                |         |                     |     |      |     |      |       |     |    |
| 60 km/h                |         |                     |     |      |     |      |       |     |    |
| 65 km/h                |         |                     |     |      |     |      |       |     |    |

| Rim<br>Ø | Item number | Description | Section<br>Width<br>(mm) | Outsider<br>Diameter<br>(mm) | Static Load<br>Radius<br>(mm) | Rolling<br>Circum-<br>ference<br>(mm) | Recom.Rim<br>Width | Tire Weight<br>(kg) | Tread Depth<br>(mm) |
|----------|-------------|-------------|--------------------------|------------------------------|-------------------------------|---------------------------------------|--------------------|---------------------|---------------------|
|----------|-------------|-------------|--------------------------|------------------------------|-------------------------------|---------------------------------------|--------------------|---------------------|---------------------|

### Farm Specialist FR-G

|                                                                                   |                        |         |                     |      |      |      |      |       |       |       |     |    |
|-----------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|-------|-------|-------|-----|----|
|  | 26.5"                  | 6X09991 | 600/55R26.5 165D TL |      |      | 610  | 1320 | 586   | 3966  | 20.00 | 135 | 25 |
|                                                                                   | Max Load (kg)          |         |                     |      |      |      |      |       |       |       |     |    |
|                                                                                   | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2    | 2.4  | 2.8  | 3.2   | 3.6   | 4     |     |    |
|                                                                                   | Static                 | 5210    | 5800                | 6870 | 7820 | 8765 | 9590 | 10305 | 11130 | 11845 |     |    |
|                                                                                   | 10 km/h                | 4080    | 4540                | 5380 | 6120 | 6860 | 7510 | 8065  | 8710  | 9270  |     |    |
|                                                                                   | 25 km/h                | 3580    | 3990                | 4720 | 5370 | 6020 | 6590 | 7080  | 7650  | 8140  |     |    |
|                                                                                   | 30 km/h                | 3420    | 3810                | 4510 | 5130 | 5755 | 6300 | 6765  | 7310  | 7780  |     |    |
|                                                                                   | 40 km/h                | 3080    | 3430                | 4060 | 4620 | 5180 | 5670 | 6090  | 6580  | 7000  |     |    |
|                                                                                   | 50 km/h                | 2740    | 3050                | 3610 | 4110 | 4610 | 5050 | 5420  | 5860  | 6230  |     |    |
|                                                                                   | 60 km/h                | 2425    | 2700                | 3195 | 3640 | 4080 | 4460 | 4790  | 5180  | 5510  |     |    |
|                                                                                   | 65 km/h                | 2265    | 2520                | 2990 | 3400 | 3810 | 4170 | 4480  | 4840  | 5150  |     |    |

### Farm Specialist FR-G

|                                                                                   |                        |         |                     |      |      |      |      |       |       |       |
|-----------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|------|-------|-------|-------|
|  | 26.5"                  | 6X10001 | 620/55R26.5 166D TL | 641  | 1378 | 618  | 4142 | 20.00 | 137,5 | 25    |
|                                                                                   | Max Load (kg)          |         |                     |      |      |      |      |       |       |       |
|                                                                                   | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2    | 2.4  | 2.8  | 3.2   | 3.6   | 4     |
|                                                                                   | Static                 | 5360    | 5970                | 7070 | 8045 | 9020 | 9870 | 10605 | 11460 | 12190 |
|                                                                                   | 10 km/h                | 4200    | 4675                | 5530 | 6295 | 7060 | 7730 | 8300  | 8970  | 9540  |
|                                                                                   | 25 km/h                | 3685    | 4100                | 4860 | 5530 | 6200 | 6780 | 7285  | 7870  | 8370  |
|                                                                                   | 30 km/h                | 3520    | 3920                | 4640 | 5280 | 5920 | 6480 | 6960  | 7520  | 8000  |
|                                                                                   | 40 km/h                | 3170    | 3530                | 4180 | 4760 | 5330 | 5840 | 6270  | 6775  | 7210  |
|                                                                                   | 50 km/h                | 2820    | 3140                | 3720 | 4230 | 4745 | 5195 | 5580  | 6030  | 6410  |
|                                                                                   | 60 km/h                | 2495    | 2780                | 3290 | 3740 | 4200 | 4590 | 4930  | 5330  | 5670  |
|                                                                                   | 65 km/h                | 2330    | 2600                | 3070 | 3500 | 3920 | 4290 | 4610  | 4980  | 5300  |

### Farm Specialist FR-G

|                                                                                     |                        |         |                     |      |      |      |       |       |       |       |     |    |
|-------------------------------------------------------------------------------------|------------------------|---------|---------------------|------|------|------|-------|-------|-------|-------|-----|----|
|  | 26.5"                  | 6X10011 | 650/55R26.5 169D TL |      |      | 650  | 1396  | 625   | 4196  | 20.00 | 151 | 25 |
|                                                                                     | Max Load (kg)          |         |                     |      |      |      |       |       |       |       |     |    |
|                                                                                     | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2    | 2.4  | 2.8   | 3.2   | 3.6   | 4     |     |    |
|                                                                                     | Static                 | 5870    | 6540                | 7740 | 8800 | 9870 | 10805 | 11605 | 12540 | 13340 |     |    |
|                                                                                     | 10 km/h                | 4590    | 5115                | 6055 | 6890 | 7725 | 8455  | 9080  | 9810  | 10440 |     |    |
|                                                                                     | 25 km/h                | 4030    | 4490                | 5315 | 6050 | 6780 | 7420  | 7970  | 8610  | 9160  |     |    |
|                                                                                     | 30 km/h                | 3850    | 4290                | 5080 | 5780 | 6480 | 7090  | 7620  | 8230  | 8760  |     |    |
|                                                                                     | 40 km/h                | 3470    | 3865                | 4575 | 5205 | 5840 | 6390  | 6860  | 7415  | 7890  |     |    |
|                                                                                     | 50 km/h                | 3090    | 3440                | 4070 | 4630 | 5190 | 5685  | 6105  | 6600  | 7020  |     |    |
|                                                                                     | 60 km/h                | 2730    | 3040                | 3600 | 4095 | 4590 | 5030  | 5400  | 5830  | 6205  |     |    |
|                                                                                     | 65 km/h                | 2550    | 2840                | 3360 | 3830 | 4290 | 4700  | 5045  | 5450  | 5800  |     |    |

### Farm Specialist FR-G Steel

|                                                                                     |                        |         |                     |      |       |       |       |       |       |       |       |    |
|-------------------------------------------------------------------------------------|------------------------|---------|---------------------|------|-------|-------|-------|-------|-------|-------|-------|----|
|  | 26.5"                  | 6X10021 | 650/55R26.5 178D TL |      |       | 650   | 1396  | 625   | 4196  | 20.00 | 182   | 25 |
|                                                                                     | Max Load (kg)          |         |                     |      |       |       |       |       |       |       |       |    |
|                                                                                     | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2     | 2.4   | 2.8   | 3.2   | 3.6   | 4     | 5     |    |
|                                                                                     | Static                 | 6730    | 7420                | 8800 | 10005 | 11210 | 12250 | 13280 | 14145 | 15010 | 17250 |    |
|                                                                                     | 10 km/h                | 5265    | 5805                | 6885 | 7830  | 8775  | 9585  | 10395 | 11070 | 11745 | 13500 |    |
|                                                                                     | 25 km/h                | 4620    | 5095                | 6040 | 6870  | 7700  | 8410  | 9125  | 9720  | 10310 | 11850 |    |
|                                                                                     | 30 km/h                | 4420    | 4870                | 5775 | 6570  | 7360  | 8040  | 8720  | 9290  | 9850  | 11325 |    |
|                                                                                     | 40 km/h                | 3980    | 4385                | 5200 | 5915  | 6630  | 7240  | 7850  | 8360  | 8870  | 10200 |    |
|                                                                                     | 50 km/h                | 3540    | 3900                | 4630 | 5260  | 5900  | 6440  | 6990  | 7440  | 7895  | 9075  |    |
|                                                                                     | 60 km/h                | 3130    | 3450                | 4090 | 4655  | 5215  | 5700  | 6180  | 6580  | 6980  | 8025  |    |
|                                                                                     | 65 km/h                | 2925    | 3225                | 3825 | 4350  | 4875  | 5325  | 5775  | 6150  | 6525  | 7500  |    |

| Rim Ø | Item number | Description | Section Width (mm) | Outsider Diameter (mm) | Static Load Radius (mm) | Rolling Circumference (mm) | Recom.Rim Width | Tire Weight (kg) | Tread Depth (mm) |
|-------|-------------|-------------|--------------------|------------------------|-------------------------|----------------------------|-----------------|------------------|------------------|
|-------|-------------|-------------|--------------------|------------------------|-------------------------|----------------------------|-----------------|------------------|------------------|

### Farm Specialist FR Trac

|                        |         |                     |     |      |     |      |       |       |    |
|------------------------|---------|---------------------|-----|------|-----|------|-------|-------|----|
| 26.5"                  | 6X10181 | 710/50R26.5 170D TL | 678 | 1342 | 596 | 4034 | 24.00 | 142,5 | 26 |
| Max Load (kg)          |         |                     |     |      |     |      |       |       |    |
| Speed \ Pressure (bar) |         |                     |     |      |     |      |       |       |    |
| 1                      |         |                     |     |      |     |      |       |       |    |
| 1.2                    |         |                     |     |      |     |      |       |       |    |
| 1.6                    |         |                     |     |      |     |      |       |       |    |
| 2                      |         |                     |     |      |     |      |       |       |    |
| 2.4                    |         |                     |     |      |     |      |       |       |    |
| 2.8                    |         |                     |     |      |     |      |       |       |    |
| 3.2                    |         |                     |     |      |     |      |       |       |    |
| 3.6                    |         |                     |     |      |     |      |       |       |    |
| 4                      |         |                     |     |      |     |      |       |       |    |
| Static                 |         |                     |     |      |     |      |       |       |    |
| 10 km/h                |         |                     |     |      |     |      |       |       |    |
| 25 km/h                |         |                     |     |      |     |      |       |       |    |
| 30 km/h                |         |                     |     |      |     |      |       |       |    |
| 40 km/h                |         |                     |     |      |     |      |       |       |    |
| 50 km/h                |         |                     |     |      |     |      |       |       |    |
| 60 km/h                |         |                     |     |      |     |      |       |       |    |
| 65 km/h                |         |                     |     |      |     |      |       |       |    |

### Farm Specialist FR-G Steel

|                        |         |                     |     |      |     |      |       |       |    |
|------------------------|---------|---------------------|-----|------|-----|------|-------|-------|----|
| 26.5"                  | 6X10031 | 710/50R26.5 170D TL | 728 | 1368 | 613 | 4113 | 24.00 | 176,5 | 25 |
| Max Load (kg)          |         |                     |     |      |     |      |       |       |    |
| Speed \ Pressure (bar) |         |                     |     |      |     |      |       |       |    |
| 1                      |         |                     |     |      |     |      |       |       |    |
| 1.2                    |         |                     |     |      |     |      |       |       |    |
| 1.6                    |         |                     |     |      |     |      |       |       |    |
| 2                      |         |                     |     |      |     |      |       |       |    |
| 2.4                    |         |                     |     |      |     |      |       |       |    |
| 2.8                    |         |                     |     |      |     |      |       |       |    |
| 3.2                    |         |                     |     |      |     |      |       |       |    |
| 3.6                    |         |                     |     |      |     |      |       |       |    |
| 4                      |         |                     |     |      |     |      |       |       |    |
| Static                 |         |                     |     |      |     |      |       |       |    |
| 10 km/h                |         |                     |     |      |     |      |       |       |    |
| 25 km/h                |         |                     |     |      |     |      |       |       |    |
| 30 km/h                |         |                     |     |      |     |      |       |       |    |
| 40 km/h                |         |                     |     |      |     |      |       |       |    |
| 50 km/h                |         |                     |     |      |     |      |       |       |    |
| 60 km/h                |         |                     |     |      |     |      |       |       |    |
| 65 km/h                |         |                     |     |      |     |      |       |       |    |

### Farm Specialist FR-G

|                        |         |                     |     |      |     |      |       |       |    |
|------------------------|---------|---------------------|-----|------|-----|------|-------|-------|----|
| 26.5"                  | 6X10041 | 750/45R26.5 170D TL | 751 | 1345 | 594 | 4044 | 24.00 | 162,5 | 25 |
| Max Load (kg)          |         |                     |     |      |     |      |       |       |    |
| Speed \ Pressure (bar) |         |                     |     |      |     |      |       |       |    |
| 1                      |         |                     |     |      |     |      |       |       |    |
| 1.2                    |         |                     |     |      |     |      |       |       |    |
| 1.6                    |         |                     |     |      |     |      |       |       |    |
| 2                      |         |                     |     |      |     |      |       |       |    |
| 2.4                    |         |                     |     |      |     |      |       |       |    |
| 2.8                    |         |                     |     |      |     |      |       |       |    |
| 3.2                    |         |                     |     |      |     |      |       |       |    |
| 3.6                    |         |                     |     |      |     |      |       |       |    |
| 4                      |         |                     |     |      |     |      |       |       |    |
| Static                 |         |                     |     |      |     |      |       |       |    |
| 10 km/h                |         |                     |     |      |     |      |       |       |    |
| 25 km/h                |         |                     |     |      |     |      |       |       |    |
| 30 km/h                |         |                     |     |      |     |      |       |       |    |
| 40 km/h                |         |                     |     |      |     |      |       |       |    |
| 50 km/h                |         |                     |     |      |     |      |       |       |    |
| 60 km/h                |         |                     |     |      |     |      |       |       |    |
| 65 km/h                |         |                     |     |      |     |      |       |       |    |

### Farm Specialist FR-G Steel

|                        |         |                     |     |      |     |      |       |     |    |
|------------------------|---------|---------------------|-----|------|-----|------|-------|-----|----|
| 30.5"                  | 6X10061 | 600/60R30.5 173D TL | 624 | 1487 | 673 | 4477 | 20.00 | 188 | 25 |
| Max Load (kg)          |         |                     |     |      |     |      |       |     |    |
| Speed \ Pressure (bar) |         |                     |     |      |     |      |       |     |    |
| 1                      |         |                     |     |      |     |      |       |     |    |
| 1.2                    |         |                     |     |      |     |      |       |     |    |
| 1.6                    |         |                     |     |      |     |      |       |     |    |
| 2                      |         |                     |     |      |     |      |       |     |    |
| 2.4                    |         |                     |     |      |     |      |       |     |    |
| 2.8                    |         |                     |     |      |     |      |       |     |    |
| 3.2                    |         |                     |     |      |     |      |       |     |    |
| 3.6                    |         |                     |     |      |     |      |       |     |    |
| 4                      |         |                     |     |      |     |      |       |     |    |
| Static                 |         |                     |     |      |     |      |       |     |    |
| 10 km/h                |         |                     |     |      |     |      |       |     |    |
| 25 km/h                |         |                     |     |      |     |      |       |     |    |
| 30 km/h                |         |                     |     |      |     |      |       |     |    |
| 40 km/h                |         |                     |     |      |     |      |       |     |    |
| 50 km/h                |         |                     |     |      |     |      |       |     |    |
| 60 km/h                |         |                     |     |      |     |      |       |     |    |
| 65 km/h                |         |                     |     |      |     |      |       |     |    |

| Rim<br>Ø | Item number | Description | Section<br>Width<br>(mm) | Outsider<br>Diameter<br>(mm) | Static Load<br>Radius<br>(mm) | Rolling<br>Circum-<br>ference<br>(mm) | Recom.<br>Rim<br>Width | Tire<br>Weight<br>(kg) | Tread<br>Depth<br>(mm) |
|----------|-------------|-------------|--------------------------|------------------------------|-------------------------------|---------------------------------------|------------------------|------------------------|------------------------|
|----------|-------------|-------------|--------------------------|------------------------------|-------------------------------|---------------------------------------|------------------------|------------------------|------------------------|

### Farm Specialist FR-G Steel

|                                                                                   |                        |         |                     |      |       |       |       |       |       |       |       |       |
|-----------------------------------------------------------------------------------|------------------------|---------|---------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|
|  | 30.5"                  | 6X10071 | 600/60R30.5 179D TL |      |       | 624   | 1487  | 673   | 4477  | 20.00 | 202   | 25    |
|                                                                                   | Max Load (kg)          |         |                     |      |       |       |       |       |       |       |       |       |
|                                                                                   | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6  | 2     | 2.4   | 2.8   | 3.2   | 3.6   | 4     | 4.5   | 5     |
|                                                                                   | Static                 | 6950    | 7665                | 9090 | 10340 | 11585 | 12655 | 13725 | 14620 | 15510 | 16755 | 17825 |
|                                                                                   | 10 km/h                | 5440    | 6000                | 7115 | 8090  | 9070  | 9905  | 10740 | 11440 | 12140 | 13110 | 13950 |
|                                                                                   | 25 km/h                | 4775    | 5265                | 6245 | 7100  | 7960  | 8690  | 9430  | 10040 | 10650 | 11510 | 12245 |
|                                                                                   | 30 km/h                | 4560    | 5030                | 5970 | 6790  | 7610  | 8310  | 9010  | 9595  | 10180 | 11000 | 11700 |
|                                                                                   | 40 km/h                | 4110    | 4530                | 5375 | 6110  | 6850  | 7480  | 8115  | 8640  | 9170  | 9910  | 10540 |
|                                                                                   | 50 km/h                | 3660    | 4030                | 4780 | 5440  | 6095  | 6660  | 7220  | 7690  | 8160  | 8815  | 9380  |
|                                                                                   | 60 km/h                | 3230    | 3565                | 4230 | 4810  | 5390  | 5890  | 6385  | 6800  | 7210  | 7795  | 8290  |
|                                                                                   | 65 km/h                | 3020    | 3330                | 3950 | 4495  | 5040  | 5500  | 5970  | 6355  | 6740  | 7285  | 7750  |

### Farm Specialist FR-G Steel

|                                                                                   |                        |         |                     |       |       |       |       |       |       |       |     |    |
|-----------------------------------------------------------------------------------|------------------------|---------|---------------------|-------|-------|-------|-------|-------|-------|-------|-----|----|
|  | 30.5"                  | 6X10081 | 750/60R30.5 181D TL |       |       | 767   | 1658  | 735   | 4986  | 24.00 | 234 | 25 |
|                                                                                   | Max Load (kg)          |         |                     |       |       |       |       |       |       |       |     |    |
|                                                                                   | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6   | 2     | 2.4   | 2.8   | 3.2   | 3.6   | 4     |     |    |
|                                                                                   | Static                 | 8350    | 9300                | 11005 | 12520 | 14040 | 15370 | 16510 | 17840 | 18975 |     |    |
|                                                                                   | 10 km/h                | 6530    | 7280                | 8610  | 9800  | 10990 | 12030 | 12920 | 13960 | 14850 |     |    |
|                                                                                   | 25 km/h                | 5735    | 6390                | 7560  | 8600  | 9645  | 10560 | 11340 | 12250 | 13035 |     |    |
|                                                                                   | 30 km/h                | 5480    | 6100                | 7225  | 8220  | 9220  | 10090 | 10840 | 11710 | 12460 |     |    |
|                                                                                   | 40 km/h                | 4940    | 5500                | 6510  | 7405  | 8300  | 9090  | 9760  | 10550 | 11220 |     |    |
|                                                                                   | 50 km/h                | 4390    | 4890                | 5790  | 6590  | 7390  | 8085  | 8685  | 9380  | 9980  |     |    |
|                                                                                   | 60 km/h                | 3880    | 4325                | 5120  | 5825  | 6530  | 7150  | 7680  | 8300  | 8830  |     |    |
|                                                                                   | 65 km/h                | 3630    | 4040                | 4785  | 5445  | 6105  | 6680  | 7180  | 7755  | 8250  |     |    |

### Farm Specialist FR-G Steel

|                                                                                     |                        |         |                     |       |       |       |       |       |       |       |     |    |
|-------------------------------------------------------------------------------------|------------------------|---------|---------------------|-------|-------|-------|-------|-------|-------|-------|-----|----|
|  | 30.5"                  | 6X10091 | 850/50R30.5 182D TL |       |       | 882   | 1652  | 719   | 4925  | 28.00 | 249 | 25 |
|                                                                                     | Max Load (kg)          |         |                     |       |       |       |       |       |       |       |     |    |
|                                                                                     | Speed \ Pressure (bar) | 1       | 1.2                 | 1.6   | 2     | 2.4   | 2.8   | 3.2   | 3.6   | 4     |     |    |
|                                                                                     | Static                 | 8600    | 9580                | 11340 | 12900 | 14470 | 15835 | 17010 | 18380 | 19550 |     |    |
|                                                                                     | 10 km/h                | 6730    | 7500                | 8870  | 10100 | 11320 | 12390 | 13310 | 14380 | 15300 |     |    |
|                                                                                     | 25 km/h                | 5910    | 6580                | 7790  | 8860  | 9940  | 10880 | 11680 | 12620 | 13430 |     |    |
|                                                                                     | 30 km/h                | 5650    | 6290                | 7440  | 8470  | 9500  | 10395 | 11165 | 12065 | 12835 |     |    |
|                                                                                     | 40 km/h                | 5085    | 5660                | 6705  | 7630  | 8550  | 9360  | 10060 | 10865 | 11560 |     |    |
|                                                                                     | 50 km/h                | 4525    | 5040                | 5965  | 6790  | 7610  | 8330  | 8950  | 9670  | 10285 |     |    |
|                                                                                     | 60 km/h                | 4000    | 4460                | 5275  | 6000  | 6730  | 7370  | 7910  | 8550  | 9095  |     |    |
|                                                                                     | 65 km/h                | 3740    | 4165                | 4930  | 5610  | 6290  | 6885  | 7395  | 7990  | 8500  |     |    |

## MULTI TRAC C/S R3

### Wagons, Balers, Spreaders, Seeders & Feed Yard Mixers

With its squared lugs and wide base for stability, the Multi Trac C/S R-3 is excellent for minimal ground disturbance for turf and mowing applications. Made in the USA.



| Item Number | Size            | Star/PLY | LI/SI  | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (Kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Weight (kg) | CoO | EAN           |
|-------------|-----------------|----------|--------|-----------------------|--------------------|---------------|--------------------|--------------------------|-------------|-----|---------------|
| 560454      | 29x12.50-15 NHS | 6        | 99 A8  | 741.7                 | 309.9              | 775           | 40                 | 2.1                      | 16.33       | US  | 5999110824703 |
| 6E0580      | 375/70-15       | 4        | 123 A4 | 901.7                 | 373.4              | 1550          | 20                 | 1.4                      | 26.68       | US  | 5999110800257 |
| 570083      | 41x14.00B20     | 4        | 120 B  | 1066.8                | 374.7              | 1400          | 50                 | 1.8                      | 46.95       | US  | 5999110802428 |
| 560361      | 36x14.00-15 NHS | 4        | 114 B  | 914.4                 | 355.6              | 1180          | 50                 | 1.4                      | 26.76       | US  | 5999110825120 |
| 6A0376      | 44x18-20        | 4        | 123 B  | 1155.7                | 457.2              | 1550          | 50                 | 1.4                      | 61.7        | US  | 5999110800196 |
| 6A0375      | 44x18-20 NHS    | 6        | 131 B  | 1137.9                | 469.9              | 1950          | 50                 | 2.1                      | 61.67       | US  | 5999110802435 |

## TURF PRO R-3

### General Turf, Maintenance And Mowing Application

Flotation tread designed for mowing and turf applications, the Turf Pro R-3 series is engineered with shallow non-skid depth with isolated tread elements that create minimal ground disturbance for a turf-friendly result. Made in the USA.



| Item Number | Size      | Star/PLY | LI/SI  | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (Kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Weight (kg) | CoO | EAN           |
|-------------|-----------|----------|--------|-----------------------|--------------------|---------------|--------------------|--------------------------|-------------|-----|---------------|
| 5116021     | 12X5.00-4 | 2        | 38 A3  | 293                   | 115                | 133           | 16                 | 1.5                      | 1.76        | CN  | 5999110804255 |
| 5E0589      | 360/55-15 | 8        | 116 B  | 770                   | 361                | 1252          | 49                 | 3.1                      | 26.5        | US  | 5999110800530 |
| 570084      | 9.50-24   | 6        | 102 A8 | 1024                  | 242                | 849           | 25                 | 2.1                      | 25.72       | US  | 5999110804262 |
| 5E0085      | 310/75-24 |          | 105 A8 | 1077                  | 315                | 948           | 41                 | 1.8                      | 37.2        | US  | 5999110825106 |
| 5E0080      | 400/70-16 | 4        | 96 A8  | 978                   | 398                | 713           | 41                 | 1                        | 38.06       | US  | 5999110800547 |

## FSE FLOTATION IMP

### Trailer, implement and transport application

Modern implement tire with dual bead and reinforced sidewall for extra load carrying capacity. Provide excellent high flotation and trailers application.



| Item number | Size        | PR | LI/SI       | Tube Type | Rim Width (inch) | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Tread Depth (mm) | Weight (Kg) | Coo | EAN           |
|-------------|-------------|----|-------------|-----------|------------------|-----------------------|--------------------|---------------|--------------------|--------------------------|------------------|-------------|-----|---------------|
| 6X15203     | 400/60-15.5 | 14 | 151A6/148A8 | TL        | AG13             | 874                   | 404                | 3450          | 30                 | 4.4                      | 20               | 34.2        | IND | 5999110833347 |
| 6X17043     | 500/50-17   | 14 | 155A6/151A8 | TL        | 16               | 960                   | 490                | 3875          | 30                 | 3.4                      | 20               | 51.0        | IND | 5999110834993 |

## FSE-AW

### Trailer, implement and transport application

Up to date implement tire with high load capacity and minimum soil compaction character. Can be used for road and off-road applications.



| Item number | Size                      | PR | LI/SI       | Tube Type | Rim Width (inch) | Mounted Diameter (mm) | Mounted Width (mm) | Max Load (kg) | Rated Speed (km/h) | Inflation Pressure (bar) | Tread Depth (mm) | Weight (Kg) | Coo | EAN           |
|-------------|---------------------------|----|-------------|-----------|------------------|-----------------------|--------------------|---------------|--------------------|--------------------------|------------------|-------------|-----|---------------|
| 6X15163     | 10.0/75-15.3              | 14 | 136A6/132A8 | TL        | 9                | 760                   | 264                | 2240          | 30                 | 6.6                      | 10               | 15.2        | IND | 5999110833309 |
| 6X17003     | 10.0/75-15.3              | 22 | 148A6/144A8 | TL        | 9                | 760                   | 264                | 3150          | 30                 | 8.5                      | 10               | 20.4        | IND | 5999110835334 |
| 6X15173     | 11.5/80-15.3              | 14 | 145A6/141A8 | TL        | 9                | 845                   | 290                | 2900          | 30                 | 5.7                      | 12               | 19.1        | IND | 5999110833316 |
| 6X15183     | 12.5/80-15.3              | 14 | 148A6/144A8 | TL        | 9                | 889                   | 307                | 3150          | 30                 | 5.2                      | 11.5             | 24          | IND | 5999110833323 |
| 6X15193     | 400/60-15.5               | 14 | 151A6/148A8 | TL        | AG13             | 874                   | 404                | 3450          | 30                 | 4.4                      | 20               | 33          | IND | 5999110833330 |
| 6X15213     | 13.0/75-16                | 10 | 142A6/138A8 | TL        | 11 9. W9. W11    | 900                   | 336                | 2650          | 30                 | 3.6                      | 12               | 27.5        | IND | 5999110833354 |
| 6X15253*    | 15.0/55-17                | 12 | 144A6/140A8 | TL        | 13               | 850                   | 391                | 2800          | 30                 | 3.7                      | 10               | 25.1        | IND | 5999110833361 |
| 6X15223*    | 480/45-17<br>(19.0/45-17) | 14 | 150A6/146A8 | TL        | 16               | 852                   | 491                | 3350          | 30                 | 3.4                      | 12               | 40.8        | IND | 5999110833378 |
| 6X15233*    | 500/50-17                 | 14 | 155A6/151A8 | TL        | 16               | 965                   | 495                | 3875          | 30                 | 3.4                      | 12               | 50.8        | IND | 5999110833385 |
| 6X15243*    | 500/50-17                 | 18 | 160A6/156A8 | TL        | 16               | 965                   | 495                | 4500          | 30                 | 5.0                      | 12               | 52.5        | IND | 5999110833392 |
| 6X15263     | 13.0/65-18                | 16 | 150A6/146A8 | TL        | 11               | 890                   | 336                | 3350          | 30                 | 5.9                      | 11               | 29          | IND | 5999110833408 |

## FSE TF DRP

### Tractor Front Tire

2WD tractor front tires, good on road application and field application with excellent steering control ability.



| Rim Ø (inch) | Product code | Size    | TL/TT | PLY RATING | LI/SI       | Rated Load (kg) | Rated speed (km/h) | Inflation Pressure (bar) | Monted Diameter (mm) | Mounted Width (mm) | Rim width (inch) | Weight (kg) | Tread Depth (mm) | Origin | EAN           |
|--------------|--------------|---------|-------|------------|-------------|-----------------|--------------------|--------------------------|----------------------|--------------------|------------------|-------------|------------------|--------|---------------|
| 16           | 6X15363      | 6.50-16 | TT    | 8          | 98A6/90A8   | 750             | 30                 | 4.2                      | 760                  | 175                | 4.5E             | 12.3        | 17               | IND    | 5999110833415 |
|              | 6X15373      | 7.50-16 | TT    | 6          | 98A6/90A8   | 750             | 30                 | 2.8                      | 805                  | 205                | 5.5F             | 15          | 20               | IND    | 5999110833422 |
| 20           | 6X15383      | 6.50-20 | TT    | 10         | 107A6/100A8 | 975             | 30                 | 5                        | 864                  | 180                | 5.00F            | 16.3        | 18               | IND    | 5999110833439 |

## FARM SPECIALIST HYDRO-PRO D

### Pivot Irrigation Systems

The Farm Specialist Hydro-Pro D is specifically designed for protecting crops and minimizing soil damage. The special nylon carcass minimizes mechanical failure and moisture deterioration. The angled tread lugs provide maximum traction while reducing crop damage to increase yield.



| SKU     | Size             | Ply rating | LI/SI | Monted Diameter [mm] | Mounted Width [mm] | Static Loaded Radius [mm] | Rolling Circumference [mm] | Max Load (kg) | Rated speed (km/h) | Inflation Pressure [bar] | Weight (kg) | Tread Depth [mm] | EAN           |
|---------|------------------|------------|-------|----------------------|--------------------|---------------------------|----------------------------|---------------|--------------------|--------------------------|-------------|------------------|---------------|
| 6X10513 | 11.2-24 Tubeless | 6          | 110A6 | 1090                 | 284                | 515.1                     | 3199.9                     | 1060          | 30                 | 1.8                      | 34.5        | 25.4             | 5999110828268 |
| 6X10503 | 11.2-24 TT       | 6          | 110A6 | 1090                 | 284                | 515.1                     | 3199.9                     | 1060          | 30                 | 1.8                      | 32          | 25.4             | 5999110828251 |
| 6X10523 | 11.2-24 TT       | 8          | 116A6 | 1090                 | 284                | 515.1                     | 3199.9                     | 1250          | 30                 | 2.4                      | 32          | 25.4             | 5999110828275 |
| 6X10483 | 14.9-24 Tubeless | 6          | 123A6 | 1245                 | 381                | 584.2                     | 3657.6                     | 1550          | 30                 | 1.4                      | 51          | 28               | 5999110828237 |
| 6X10473 | 14.9-24 TT       | 6          | 123A6 | 1245                 | 381                | 584.2                     | 3657.6                     | 1700          | 30                 | 1.8                      | 48.7        | 28               | 5999110828220 |
| 6X10493 | 14.9-24 TT       | 8          | 128A6 | 1245                 | 381                | 584.2                     | 3657.6                     | 1800          | 30                 | 1.8                      | 52.5        | 28               | 5999110828244 |
| 6X10533 | 11.2-38 Tubeless | 6          | 117A6 | 1445                 | 284                | 686.1                     | 4242.1                     | 1285          | 30                 | 1.8                      | 42.6        | 28               | 5999110828282 |
| 6X10543 | 11.2-38 TT       | 6          | 117A6 | 1445                 | 284                | 686.1                     | 4242.1                     | 1285          | 30                 | 1.8                      | 45.9        | 28               | 5999110828299 |
| 6X10553 | 11.2-38 TT       | 8          | 122A6 | 1445                 | 284                | 686.1                     | 4242.1                     | 1500          | 30                 | 2.4                      | 42.7        | 28               | 5999110828305 |

## FARM SPECIALIST HYDRO-PRO ND

### Linear & Pivot Irrigation Systems

The Farm Specialist Hydro-Pro ND is designed with a non-directional tread pattern to maximize traction in either direction. The tire also features specially designed tread voids to facilitate cleaning. The round tread arc design also minimizes crop and soil damage, thus increasing yield.



| SKU     | Size             | Ply rating | LI/SI | Monted Diameter [mm] | Mounted Width [mm] | Static Loaded Radius [mm] | Rolling Circumference [mm] | Max Load (kg) | Rated speed (km/h) | Inflation Pressure [bar] | Weight (kg) | Tread Depth [mm] | EAN           |
|---------|------------------|------------|-------|----------------------|--------------------|---------------------------|----------------------------|---------------|--------------------|--------------------------|-------------|------------------|---------------|
| 6X10603 | 11.2-24 Tubeless | 6          | 110A6 | 1090                 | 284                | 515.1                     | 3199.9                     | 1060          | 30                 | 1.8                      | 32.5        | 26               | 5999110828350 |
| 6X10593 | 11.2-24 TT       | 6          | 110A6 | 1090                 | 284                | 515.1                     | 3199.9                     | 1060          | 30                 | 1.8                      | 30.3        | 26               | 5999110828343 |
| 6X10613 | 11.2-24 TT       | 8          | 116A6 | 1090                 | 284                | 515.1                     | 3199.9                     | 1250          | 30                 | 2.4                      | 30.3        | 26               | 5999110828367 |
| 6X10573 | 14.9-24 Tubeless | 6          | 123A6 | 1245                 | 381                | 584.2                     | 3657.6                     | 1550          | 30                 | 1.4                      | 47.5        | 28               | 5999110828329 |
| 6X10563 | 14.9-24 TT       | 6          | 123A6 | 1245                 | 381                | 584.2                     | 3657.6                     | 1550          | 30                 | 1.4                      | 43.7        | 28               | 5999110828312 |
| 6X10583 | 14.9-24 TT       | 8          | 128A6 | 1245                 | 381                | 584.2                     | 3657.6                     | 1800          | 30                 | 1.8                      | 46.5        | 28               | 5999110828336 |
| 6X10633 | 11.2-38 Tubeless | 6          | 117A6 | 1445                 | 284                | 686.1                     | 4242.1                     | 1285          | 30                 | 1.8                      | 46.2        | 26               | 5999110828381 |
| 6X10623 | 11.2-38 TT       | 6          | 117A6 | 1445                 | 284                | 686.1                     | 4242.1                     | 1285          | 30                 | 1.8                      | 43          | 26               | 5999110828374 |
| 6X10643 | 11.2-38 TT       | 8          | 122A6 | 1445                 | 284                | 686.1                     | 4242.1                     | 1500          | 30                 | 2.4                      | 43          | 26               | 5999110828398 |

More from the Carlstar brand:

## POWERSPORT



## OUTDOOR POWER EQUIPMENT



## CONSTRUCTION / INDUSTRIAL



## TRAILERS AND TOWABLES





**CARLISLE**

*branded tires are now*

**CARLSTAR**

The Carlstar Group Kft.  
Irinyi József utca 4-20. 1117 Budapest, Hungary  
[eucs@carlstargroup.eu](mailto:eucs@carlstargroup.eu)  
[www.carlstargroup.eu](http://www.carlstargroup.eu)



**THE CARLSTAR GROUP**

---

The content and information in the Catalogue is provided as information to the interested persons and may be used for informational purposes only. Information on products may pertain to limited geographic areas and markets. A reference to a product in the Catalogue does not imply that such product is, remains or will be available in the reader's location. None of the content and information in the Catalogue may be deemed to constitute an offer by The Carlstar Group. The Carlstar Group makes every effort to maintain the accuracy and quality of the information provided in the Catalogue. However, The Carlstar Group cannot guarantee and assumes no legal liability or responsibility for the accuracy or completeness of the information provided in the Catalogue. The Carlstar Group assumes no legal liability or responsibility for printing errors. It is the reader who assumes the risk that the information in the Catalogue may be incomplete, inaccurate, out of date or it may not meet the reader's needs and requirements.

---

[www.carlstargroup.eu](http://www.carlstargroup.eu) • [eucs@carlstargroup.eu](mailto:eucs@carlstargroup.eu)