

CARLISLE

branded tires are now

CARLSTAR



CONSTRUCTION – INDUSTRIAL

CONSTRUCTION – INDUSTRIAL

Construction and industrial tires used to be manufactured under the name Carlisle has been workhorses of American industry for decades. Applications for skid steer, backhoe, telescopic loader, forklift and more. Now they are getting a new brand name after their manufacturing company: CARLSTAR

TREAD VIEW QUICK REFERENCE GUIDE





GROUND FORCE 300 G-2

Motor grader, telehandler

The GF 300 G-2 is designed for stability. With its cut-resistant tread compound and self-cleaning tread pattern, it will deliver good traction in all weather conditions. Heavy duty construction and increased tread depth boost service life. Increased lug-to-void ratio creates heightened traction on soft terrain. Cross-ply bias creates stability in the sidewall. Superior self-cleaning properties.



Item Number	Size	PR	LI/SI	Tube Type	ECE	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
6X14213	13.00-24 TL	14	146/A8	TL	YES	8	1278	333	3000	40	3.5	23.8	71.0	IN	5999110832890
6X14223	14.00-24 TL	14	151/A8	TL	YES	8	1348	363	3450	40	3.3	27	76.5	IN	5999110832906
6X14233	14.00-24 TL	20	157/A8	TL	YES	8	1348	363	4125	40	4	27	82.8	IN	5999110832913

GROUND FORCE 700 R4

Backhoe loader, industrial tractors

Ground Force 700 is a radial backhoe tire designed for greater load capacity and more comfortable ride versus traditional bias backhoe tires. Increased tread depth, puncture-resistant steel belts, and multiple tread options make this the tire of choice for operators looking to get the most out of their backhoe or utility tractor.



Item number	Size	LI/SI	Tube Type	ECE	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
6X15413	280/80R18 (10.5/80R18)	132A8/B	TL	YES	9	914	287	2000	50	4	28	38.5	CN	5999110833446
6X15421	340/80R18 (12.5/80R18)	143A8/B	TL	YES	11	996	353	2725	50	4	30	57.5	CN	5999110833453
6X15431	400/70R18 (405/70R18)	147A8/B	TL	YES	13	1020	409	3075	50	4	33	63.5	CN	5999110833460
6X15441	280/80R20 (10.5/80R20)	133A8/B	TL	YES	9	967	285	2060	50	4	28	41.5	CN	5999110833477
6X15451	340/80R20 (12.5/80R20)	144A8/B	TL	YES	11	1053	356	2800	50	4	30	61.5	CN	5999110833484
6X15461	380/75R20 (14.5R20)	148A8/B	TL	YES	12	1088	386	3150	50	4	33	65.5	CN	5999110833491
6X15471	400/70R20 (16.0R20)	149A8/B	TL	YES	13	1072	409	3250	50	4	33	69.5	CN	5999110833507
6X15651	400/70R20 (16.0R20) ST	149A8/B	TL	YES	13	1072	409	3250	50	4	33	74.5	CN	5999110833556
6X15481	400/70R24 (16.0R24)	152A8/B	TL	YES	13	1172	406	3550	50	4	33	80.5	CN	5999110833514
6X15491	440/80R24 (16.9R24)	161A8/B	TL	YES	14	1312	457	4625	50	4	36	110.5	CN	5999110833521
6X15501	460/70R24 (17.5LR24)	159A8/B	TL	YES	15	1247	467	4375	50	4	36	101	CN	5999110833538
6X15511	500/70R24 (19.5LR24)	164A8/B	TL	YES	16	1317	506	5000	50	4	36	115.5	CN	5999110833545
6X15521	480/80R26 (18.4R26)	160A8/B	TL	YES	15	1412	498	4500	50	3.2	36	130	CN	5999110833552
6X15103	440/80R28 (16.9R28)	156A8/B	TL	YES	14	1416	457	4000	50	3.2	36	121.5	CN	5999110833569

ST = Steel Belt

GROUND FORCE 700 MX

Backhoe loader, industrial tractors

Ground Force 700 is a radial backhoe tire designed for greater load capacity and more comfortable ride versus traditional bias backhoe tires. Increased tread depth, puncture resistant steel belts, and multiple tread options make this the tire of choice for operators looking to get the most out of their backhoe or utility tractor.



Item number	Size	LI/SI	Tube Type	ECE	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
6X15143	405/70R18 (16/70R18)	141B	TL	YES	13	1025	401	2575	50	4	26	68.5	CN	5999110833576
6X15153	405/70R20 (16/70R20)	149A8/B	TL	YES	13	1076	404	3250	50	4	26	74.5	CN	5999110833583
6X15023	460/70R24 (17.5LR24)	159A8/B	TL	YES	15	1250	462	4375	50	4	28	111	CN	5999110833590
6X15113	500/70R24 (19.5LR24)	164A8/B	TL	YES	16	1310	503	5000	50	4	28	124	CN	5999110833606

GROUND FORCE 600

Backhoe loader, compact tractor

The Ground Force 600 is built for all weather conditions. With its rugged, heavy-duty construction, it withstands rigorous operating site conditions. Tires have cut-, crack-, and chip-resistant tread compound, heavy duty nylon cross plies for durability and good traction in all weather conditions.




Item Number	Size	PR	LI/SI	Tube Type	ECE	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
6X14493	16.9-24	8	142/A8	TL	YES	DW14L	1310	429	2650	40	1.9	35	81.00	IN	5999110832999
6X14303	16.9-24	16	153/A8	TL	YES	DW15L	1310	429	3650	40	3	35	83.50	IN	5999110833019
6X14312	17.5L-24	12	148/A8	TL	YES	DW15L	1270	445	3150	40	2.7	33	78.25	IN	5999110833033
6X14323	17.5L-24	18	154/A8	TL	YES	DW15L	1270	445	3750	40	3.8	33	81	IN	5999110833040
6X14333	19.5L-24	16	157/A8	TL	YES	DW16L	1325	490	4125	40	3	38	96	IN	5999110833071
6X14343	21L-24	16	159/A8	TL	YES	DW18L	1377	533	4375	40	2.6	36	113	IN	5999110833088
6X14683	18.4-26	16	162/A8	TL	YES	DW16L	1425	467	4750	40	3.2	36	105	IN	5999110833101
6X14503	16.9-28	12	152/A8	TL	YES	DW14L	1410	429	3550	40	2.6	35	85.5	IN	5999110833118

GROUND FORCE 625 XT

Backhoe loader, compact tractor

Designed for rigorous operating site conditions. New improved cut-, crack-, and chip-resistant tread compound and more robust construction for longer service life and better wear. Self-cleaning traction bars incorporated in the tread void provide excellent traction regardless of weather conditions. More tread depth and rubber for long life.

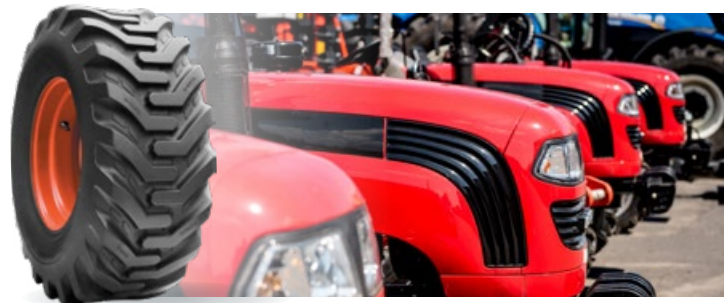

Item Number	Size	PR	LI/SI	Tube Type	ECE	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
6X14753	400/70-20	16	149/A8	TL	YES	13	1097	409	3250	40	4	34	67.0	IN	5999110832975
6X14743	400/80-24	20	162/A8	TL	YES	W13	1262	394	4750	40	5	34	86.0	IN	5999110832982
6X14693	16.9-24	12	149/A8	TL	YES	DW15L	1310	429	3250	40	2.6	30	83.00	IN	5999110833002
6X14703	16.9-24	16	153/A8	TL	YES	DW15L	1310	429	3650	40	3	30	87	IN	5999110833026
6X14793	19.5L-24	12	151/A8	TL	YES	DW16L	1305	483	3450	40	2.3	0	103	IN	5999110833064
6X14673	18.4-26	12	156/A8	TL	YES	DW16L	1425	480	4000	40	2.5	30	116	IN	5999110833095
6X14663	16.9-28	12	158/A8	TL	YES	DW15L	1410	450	4250	40	2.6	30	98	IN	5999110833125

GROUND FORCE 650 & 675

Backhoe loader, compact tractor

Ground Force 650 front wheel backhoe tires and Ground Force 675 back wheel backhoe tires are designed with heavy-duty construction and self-cleaning traction bars to withstand rigorous operating site conditions. These tires feature a multi-surface directional tread pattern, self-cleaning traction bars incorporated in the tread void and heavy-duty construction.



Item Number	Size	PR	LI/SI	Tube Type	ECE	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
6X14713	10.5/80-18	14	134/A8	TL	YES	W9	907	274	2120	40	5.4	21.5	32	IN	5999110832937
6X14653	12.5/80-18	16	144/A8	TL	YES	W9	980	307	2800	40	4.9	28	41.75	IN	5999110832944
6X14723	10.5-20	10	133/A8	TL	YES	9	955	269	2060	40	3.8	21.5	36.85	IN	5999110832951
6X14733	12.5-20	16	141/A8	TL	YES	11	1040	325	2575	40	4.5	21.5	48.00	IN	5999110832968

GROUND FORCE 717

Backhoe, Ag-Industrial Multipurpose Tractors

Steel belted radial tire for industrial, construction and road works applications. The deep tread design provides excellent traction. Wear resistant tread compound provides longer service life. The unique bead design gains better airtightness for tubeless tires.



Item number	Size	LI/SI	Tube Type	ECE	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
6X16441	460/70R24 (17.5LR24)	159A8/B	TL	YES	DW15L	1254	455	4375	50	4	36	94.8	CN	5999110834603
6X16451	500/70R24 (19.5LR24)	164A8/B	TL	YES	DW16L	1310	503	5000	50	4	38	115.45	CN	5999110834610

GROUND FORCE 801

Wheeled Excavator

Applicable for excavator and rough surface transporters with unique Off-road tread pattern design providing excellent traction and puncture resistance performance.



Item number	Size		LI/SI	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
6X16411	8.25-20	14	134/B	SET	6.5	995	235	2120	50	7.4	17	35.88	CN	5999110834573
6X16421	9.00-20	16	143/B	SET	7	1018	259	2725	50	8.1	20	44.19	CN	5999110834580
6X16431	10.00-20	16	146/B	SET	7.5	1055	278	3000	50	7.5	19	44.96	CN	5999110834597

SET=tire+tube+flap

GROUND FORCE 901

Multipurpose Loaders, Backhoe, Agro-Industrial

A steel belted tire with a large tread blocks for traction and wear performance. The tire has good self-cleaning ability and robust construction.




Item number	Size	LI/SI	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
6X16461	405/70R18	141B/153A2	TL	11.00	1020	400	2575/3650	50/10	3.8	20	63.25	CN	5999110834627
6X16471	405/70R20	143B/155A2	TL	13.00	1090	400	2725/3875	50/10	3.8	20	70.93	CN	5999110834634
6X16481	405/70R24	146B/158A2	TL	13.00	1170	400	3000/4250	50/10	3.8	20	79.96	CN	5999110834641

GROUND FORCE ULTRA RIB GSE

Compaction and Road Paving Equipments, Material Handling Equipments, Mining

Combined with a sturdy rib tread pattern and premium tread compounds, the Ground Force Ultra Rib GSE tire is specially designed for optimal performance on ground support equipment.

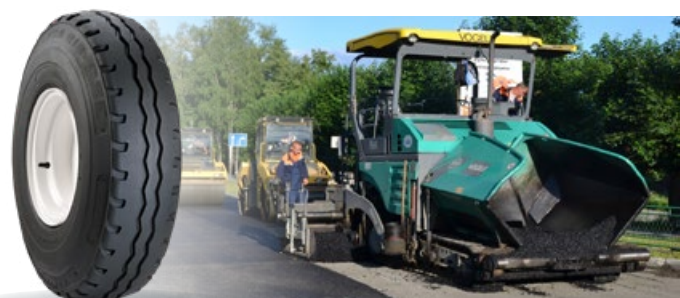

Item number	Size	PR	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
52N208	5.70-8 NHS	8	TT	3.75	467.4	150	667	15	8.25	8.7	5.8	US	5999110807065
60108	9.00-10 NHS	10	TT	6	691	246	1520	15	5.8	7.1	16	US	5999110806761

GUARD DOG HD

General Duty Skid Steer And Compact Tractor Applications

Designed for heavy-duty skid steers, the Guard Dog HD tire has premium tread compounds for tougher service conditions and rigorous construction applications. With its stepped-off outer tread lugs and squared shoulder design, the Guard Dog HD delivers maximum performance and stability on the work site. Made in the USA.



Item Number	Size	PR	LI/SI	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
570130	10-16.5	10		TL	8.25	783.6	262	2136	10	5.2	20.6	25.7	US	5999110803678
570031	33x15.50-16.5	12	148/A2	TL	12	833.1	366	3100	10	4.15	22.2	44	US	5999110803685

TRAC CHIEF

Skid Steer, Backhoe, Subcompact Tractor

The Trac Chief tire delivers diverse capabilities of aggressive and durable traction on soft surfaces while still providing a smooth ride. It's directional tread design and high load capacity brings stability and easy steering.




Item Number	Size	PR	LI/SI	Tube Type	ECE	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
51S311	215/50D10 (18x8.50-10)	4	74/A2	TL	YES	7	462.3	211	375	10	1.5	12.7	6.76	US	5999110825427
560483	20x8.00-10	4	77/A3	TL		7	490.2	208	412	15	1.65	12.7	7.97	US	5999110804163
51S3C2	5.70-12 NHS (140/90-12)	4	93/A2	TL	YES	4.5	569	140	650	10	4.15	13.5	7.22	US	5999110825137
51S3G8	23x8.50-12 SS NHS (215/65D12)	6	101/A2	TL	YES	7	574	213	825	10	3.45	11.1	11.86	US	5999110800486
51S361	305/60D12 (26x12.00-12 NHS)	4	100/A2	TL	YES	10.5	647.7	320	800	10	1.4	15.1	16.81	US	5999110800516
51S388	23x8.50-14 SS NHS (215/55-14 SS)	4	94/A2	TL	YES	7	584.2	203	670	10	2.4	13.5	10	US	5999110800554
51S379	215/65D14 (25x8.50-14 SS NHS)	6	107/A2	TL	YES	7	655.3	216	975	10	3.45	13.5	12.87	US	5999110800509
51S339	27x8.50-15	6	111/A2	TL		7	678.2	229	1090	10	3.45	13.5	16.52	US	5999110804200
560369	27x10.50-15	8	126/A2	TL		8.5	678.2	259	1700	10	4.15	13.5	18.27	US	5999110825700
51S3H7	27x10.50-15	6	114/A2	TL		8.5	680.7	264	1184	10	3.1	13.5	16.44	US	5999110825472
560484	27x12.50-15	4	105/A2	TL		10	711.2	305	921	10	1.4	15.1	18.61	US	5999110825809
570139	28x8.50-15 NHS	6	102/A2	TL		7	717.6	222	850	10	3.1	12.7	14.48	US	5999110825489
51S3C8	265/65-16.5 (10-16.5 NHS)	6	124/A2	TL	YES	8.25	774.7	272	1600	10	3.1	15.1	20.1	US	5999110800448
51S3D1	10-16.5 NHS	8		TL		8.25	774.7	272	1878	10	4.15	15.1	20.2	US	5999110804101
5701401	10-16.5 NHS	10		TL		8.25	776	274	2136	10	5.2	15.1	23.3	CN	5999110804095
51S3C9	305/70D16.5 (12-16.5 NHS)	6	130/A2	TL	YES	9.75	833.1	307	1900	10	2.75	18.3	25.4	US	5999110800479
5701411	12-16.5 NHS	12		TL		9.75	835	327	2867	10	5.5	18.3	31.8	CN	5999110804125
510039	14-17.5	14	155/A2	TL		10.5	916.9	358	3874	10	5.5	19.8	38.2	US	5999110804149
510027	355/70D17.5 (14-17.5 NHS)	6	135/A2	TL	YES	10.5	906.8	362	2180	10	2.1	19.8	37.5	US	5999110800455
510024	15.00-19.5	12	157/A2	TL		12.25	1008.4	412	4169	10	4.15	20.6	52.44	US	5999110804156
511729	385/65-19.5 (15.00-19.5 NHS)	6	144/A2	TL	YES	12.25	1016	396	2800	10	2.1	20.6	47.5	US	5999110804231
511703	385/65D19.5 (15.00D19.5 NHS)	16	164/A2	TL		12.25	1017.3	414	5000	10	6.55	19.8	52.5	US	5999110804224
570122	12.4-16	6	110/A8	TL		11	950	338	1060	40	2.1	23.8	37.11	US	5999110804118

ULTRA GUARD

General Duty Skid Steer

Used for severe service skid steers, the Ultra Guard tire is engineered with an open shoulder design displaying a lug void essential for abrasive surface conditions. Its extra deep tread depth shows a 70% increased depth than other premium skid steer products.

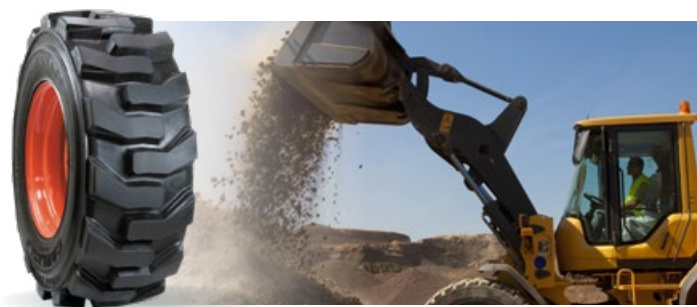

Item Number	Size	PR	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
560402	10.00-16.5	10	TL	8.25	772.9	264	2136	10	5.2	34.9	35.9	US	5999110804279

ULTRA GUARD LVT

General Duty Skid Steer

The Ultra Guard LVT tire is used on hard surface severe-service skid steers. With its low tread void for maximum net ground contact, massive footprint & extra premium chip/chunk resistant tread rubber, the Ultra Guard LVT tire is essential on surface sites such as demolition, rocks, gavel and concrete.



Item Number	Size	PR	LI/SI	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
570075	10-16.5	10	134/A2	TL	8.25	797.6	277	2136	10	5.2	34.9	40.71	US	5999110804286

ULTRA GUARD MX

General Duty Skid Steer

The Ultra Guard MX tire is engineered for Severe Duty skid steer applications. Designed with a unique large angled, non-directional center lug tread design, the Ultra Guard MX delivers increased performance on soft and hard surfaces. Made in the USA.



Item Number	Size	PR	LI/SI	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
6A0325	10-16.5	10		TL	8.25	798.8	279	2136	10	5.2	33.3	32.8	US	5999110826042
6A0326	12-16.5	14		TL	9.75	840.7	330	3075	10	6.2	33.3	42.2	US	5999110826059
6A0327	14-17.5	14	155/A2	TL	10.5	914.7	366	3874	10	5.5	33.3	52.94	US	5999110804293

USA LOADER

Skid Steers, Aerial Platform Lifts And Backhoe Loaders

Engineered with lateral grooves and a "Boot Heel Lug" tread conuguration, the USA Loader brings traction and stability on specialty applications where safety and stability are critical.



Item Number	Size	PR	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
510713	10.00-16.5 NHS	10	TL	8.25	777.2	274	2141	10	5.2	20.6	27.7	US	5999110804309
510716	12-16.5 NHS	10	TL	9.75	835.7	320	2540	10	4.5	21.4	34.7	US	5999110804316
6A0170	305/70D16.5 NHS	10	TL	9.75	835.7	320	2540	10	4.5	21.4	35	US	5999110804323

XTRA GRIP R-4

Backhoe And Industrial Application

The Xtra Grip R4 tire provides excellent traction for turf and sod applications. This all-purpose farm or industrial tractor tire is engineered with a compound to resist cutting and penetration. It also has a rugged, heavy-duty construction to withstand rigorous operating site conditions.



Item Number	Size	PR	LI/SI	Tube Type	ECE	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
570059	43x16.00-20	6	129/A8	TL	YES	14	1094.7	424	1850	40	2.1	21.4	53.15	US	5999110804354
6A0428	17.5L-24	6	132/A8	TL		15	1226.8	447	2000	40	1.4	25.4	69.2	US	5999110829869

WT300

Work Turf

The WT300 tire is constructed for tractors with less than 30 horsepower. Its low ground pressure ensures turf preservation while its angled tread pattern provides aggressive traction while preventing debris buildup.



Item Number	Size	PR	LI/SI	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
570046	18x8.50-10	4	74/A3	TL	6	464.8	206	376	15	1.5	11.1	5.58	US	5999110804330
570042	26x12.00-12	4	100/A3	TL	9.5	652.8	315	800	15	1.4	14.3	12.8	US	5999110804347

INDUSTRIAL DEEP TRACTION

Material Handling Equipments

With its flat tread and reinforced beads, the Industrial Deep Traction tire is an essential standard duty tire that delivers stability and long lasting performance.



Item Number	Size	PR	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
60101	6.90/6.00-9 NHS	10	TT	4	556.3	175	1685	15	8.6	15.1	9	US	5999110806785

INDUSTRIAL ALL PURPOSE

Material Handling Equipments

Designed with two different rib patterns throughout the tread, the Industrial All Purpose tire presents a multi-purpose service of both traction and support with optimized weight distribution for stability with heavy equipment.



Item Number	Size	PR	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
60129	7.50-10 NHS	10	TT	6	637.5	209	1383	15	6.9	9.5	11	US	5999110806877
60100	7.50-10 LRE	10 (LRE)	TT	5.5	642.6	193	896	100	6.2	9.5	11	US	5999110806860

PREMIUM WIDE TRAC

Material Handling Equipments

The Premium Wide Trac tire offers superior level design with an extra heavy-duty sidewall for material handling applications. Its durable construction resists abrasions in severe conditions to maximize efficiency.



Item Number	Size	PR	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
60118	5.70/5.00-8 NHS	8	TT	3	469.9	140	875	15	8.25	13.5	6.8	US	5999110806938
60120	28x9.00-15	14	TT	7	693.4	224	3121	15	8.25	14.3	24.3	US	5999110807058
60119	28x9.00-15	12	TT	7	693.4	226	3416	15	9.65	14.3	23.91	US	5999110806945
60115	28x12.00-15	20	TT	9.75	713.7	292	4899	15	10.35	19.1	39.03	US	5999110806914

ROAD ROLLER

Material Handling Equipments

The Road Roller tire offers a smooth and steady tread for a consistent and leveled ride. With superior heat resistant nylon fabric belts, this tire supports heavy-duty handling with effortless execution.



Item Number	Size	PR	Tube Type	Rim Width (inch)	Mounted Diameter (mm)	Mounted Width (mm)	Max Load (kg)	Rated Speed (km/h)	Inflation Pressure (bar)	Tread depth (mm)	Weight (kg)	CoO	EAN
60127	7.50-15	12	TT	6	784.9	218	2658	15	7.6	0	19.7	US	5999110806846
58R2E1	7.50-15	14	TT	6	784.9	218	2858	15	8.6	0	21.8	US	5999110806839
58R3A2	8.5/90-15K	6	TL	6	784.9	218	1769	15	3.45	0	21	US	5999110826127

GROUND FORCE 200 & 202

Material Handling Equipments

The Ground Force 200, industrial pneumatic tire features a heavy-duty design for tough applications. Sipes in the shoulder lugs enhance heat dissipation. Reinforced sidewall for reduced deflection and improved protection. Wider tread profile for improved traction and lateral stability [GF 202]. Rim guard protects bead area in rugged applications.



SKU	Size	PR	Tread Type	Mounted Diameter (mm)	Mounted Section Width (mm)	Rim Width (inch)	Inflation Pressure (bar)	Load Capacity (kg)			Tread depth (mm)	Weight (kg)	CoO	EAN
								- Forklift	- Up to 25 Km/h	- Side Loader				
XA4A047	16x6.00-8 TT SET	18	200	420	158	4.33	10.5	1540	1185	1790	12.5	8.1	IN	5999110832531
XA4A048	18x7.00-8 TT SET	14	200	462	170	4.33	9	1910	1460	2400	17	10.0	IN	5999110832555
XA4A049	18x7.00-8 TT SET	16	200	462	170	5.33	10	2145	1650	2490	17	10.9	IN	5999110832562
XA4A050	18x7.00-8 TT SET	18	200	462	170	6.33	10.5	2210	1700	2565	17	10.9	IN	5999110832579
XA4A033	5.00 - 8 TT SET	8	202	473	135	3	8.25	1235	950	1435	12.5	6.9	IN	5999110832586
XA4A034	5.00 - 8 TT SET	10	200	470	145	3	10	1415	1090	1645	13	7.7	IN	5999110832593
XA4A051	21x8.00-9 TT SET	16	200	535	210	6.00	10	2755	2120	3200	18	16.7	IN	5999110832609
XA4A035	6.90/6.00 - 9 TT SET	10	202	540	160	4	8.5	1715	1320	1990	14	9.9	IN	5999110832616
XA4A036	6.00-9 TT SET	12	200	540	165	4	10	1885	1450	2190	15.5	11.3	IN	5999110832623
XA4A052	23x9.00-10 TT SET	18	200	590	235	7.00	9	3160	2430	3670	18.5	22.3	IN	5999110832630
XA4A053	23x9.00-10 TT SET	20	200	590	235	8.00	10	3445	2650	4000	18.5	22.3	IN	5999110832647
XA4A037	6.50 - 10 TT SET	10	202	600	185	5	7.75	1950	1500	2260	15.5	12.1	IN	5999110832654
XA4A038	6.50 - 10 TT SET	12	200	598	190	5.00	9	2145	1650	2490	15.5	16.0	IN	5999110832661
XA4A039	6.50 - 10 TT SET	14	200	598	190	5.00	10	2340	1800	2650	15.5	15.5	IN	5999110832678
XA4A056	23x10.00-12 TT SET	18	200	605	260	8.00	9	3385	2605	3935	15.5	24.4	IN	5999110832685
XA4A040	7.00-12 TT SET	12	200	680	196	5	8.5	2680	2060	3110	15.5	19.7	IN	5999110832692
XA4A042	7.00-12 TT SET	16	200	680	196	5.00	10	2910	2240	3400	15.5	20.5	IN	5999110832708
XA4A041	7.00-12 TT SET	14	202	685	195	5.00	9	2755	2120	3200	16.8	17.2	IN	5999110832715
XA4A054	27x10.00-12 TT SET	12	200	692	252	8.00	7.25	3250	2470	4275	21.5	27.1	IN	5999110832722
XA4A055	27x10.00-12 TT SET	16	200	692	252	9.00	8	3900	3000	4530	21.5	29.3	IN	5999110832739
XA4A043	8.15-15 TT SET	12	200	725	219	7.00	8.25	3445	2650	4000	18	24.3	IN	5999110832746
XA4A044	8.15-15 TT SET	14	202	715	219	7.00	10	3900	3000	4530	19	24.1	IN	5999110832753
XA4A045	8.15-15 TT SET	16	200	725	219	7.00	10.5	4010	3085	4660	18	26.6	IN	5999110832760
XA4A062	250-15 TT SET	16	200	747	250	7.00	8.25	4355	3350	5060	18	34.4	IN	5999110832777
XA4A057	7.00-15 TT SET	12	200	750	200	5.50	8.25	3070	2360	3565	18	25.1	IN	5999110832784
XA4A058	7.00-15 TT SET	14	200	750	200	6.50	9.25	3280	2525	3810	18	25.1	IN	5999110832791
XA4A059	7.00-15 TT SET	16	200	750	200	7.50	10	3545	2725	3990	18	25.1	IN	5999110832807
XA4A060	7.50-15 TT SET	14	200	780	218	6.00	9.25	3640	2800	4230	18	26.4	IN	5999110832814
XA4A061	7.50-15 TT SET	16	200	780	218	7.00	10	3810	2930	4425	18	28.6	IN	5999110832821
XA4A063	300-15 TT SET	16	200	840	300	8.00	6	5130	3945	5955	22	46.1	IN	5999110832838
XA4A064	300-15 TT SET	18	200	840	300	9.00	7.5	5845	4495	6785	22	48.8	IN	5999110832845
XA4A065	300-15 TT SET	20	200	840	300	10.00	9	6500	5000	7550	22	48.8	IN	5999110832852
XA4A066	8.25-15 TT SET	14	200	840	235	6.50	8	4225	3250	4910	21	40.0	IN	5999110832869
XA4A067	8.25-15 TT SET	16	200	840	235	7.50	9.25	4615	3550	5345	21	40.0	IN	5999110832876
XA4A046	8.25-15 TT SET	14	202	845	240	6.5	8	4225	3250	4910	18	31.4	IN	5999110832883

SET=tire+tube+flap



TM

THE CARLSTAR GROUP

The content and information in the Catalogue is provided as information to the interested persons and may be used for informational purposes only. Information on products may pertain to limited geographic areas and markets. A reference to a product in the Catalogue does not imply that such product is, remains or will be available in the reader's location. None of the content and information in the Catalogue may be deemed to constitute an offer by The Carlstar Group. The Carlstar Group makes every effort to maintain the accuracy and quality of the information provided in the Catalogue. However, The Carlstar Group cannot guarantee and assumes no legal liability or responsibility for the accuracy or completeness of the information provided in the Catalogue. The Carlstar Group assumes no legal liability or responsibility for printing errors. It is the reader who assumes the risk that the information in the Catalogue may be incomplete, inaccurate, out of date or it may not meet the reader's needs and requirements.

www.carlstargroup.eu • eucs@carlstargroup.eu